




Low-power, 2.5 MHz, RR IO, 36 V BiCMOS operational amplifier



SO8



MiniSO8



DFN8 (3x3 mm)

Features

- Low-power consumption: 380 μ A typ.
- Wide supply voltage: 4 V - 36 V
- Rail-to-rail input and output
- Gain bandwidth product: 2.5 MHz
- Low input bias current: 30 nA max.
- No phase reversal
- High tolerance to ESD: 4 kV HBM
- Extended temperature range: -40 °C to 125 °C
- Automotive grade
- Small SMD packages
- 40 V BiCMOS technology
- Enhanced stability vs. capacitive load

Applications

- Active filtering
- Audio systems
- Automotive
- Power supplies
- Industrial
- Low/high side current sensing

Description

The **TSB572** dual operational amplifier offers extended voltage operating range from 4 V to 36 V and rail-to-rail input/output.


The **TSB572** offers a very good speed/power consumption ratio with 2.5 MHz gain bandwidth product while consuming only 380 μ A typically at 36 V supply voltage.

Stability and robustness of the **TSB572** make it an ideal solution for a wide voltage range of applications.

Maturity status link	
TSB572	
Related products	
TSB611	For below 100 μ A solution

1 Package pin connections

Figure 2. Pin connections for each package (top view)

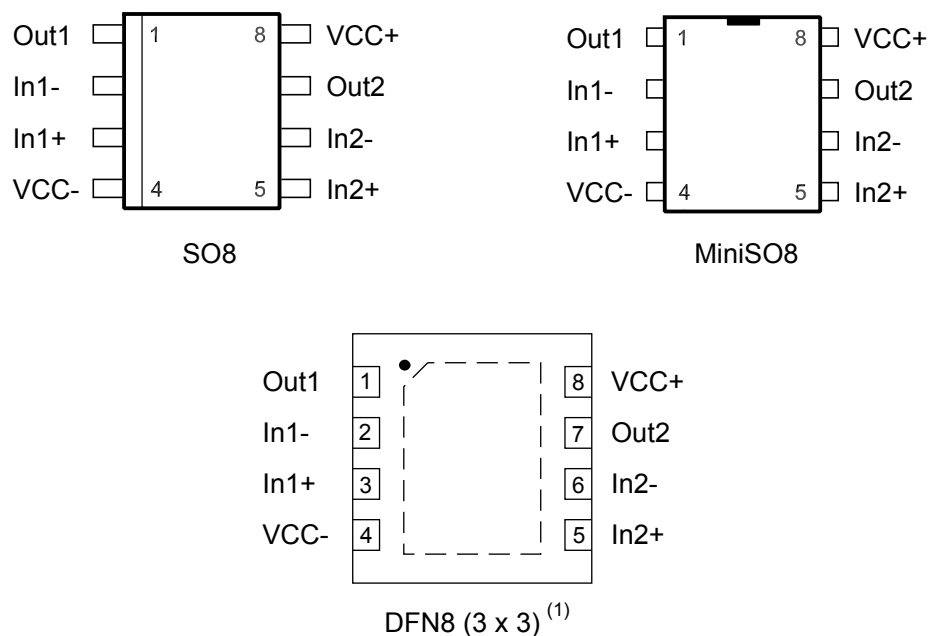

- Exposed pad can be left floating or connected to ground

2 Absolute maximum ratings and operating conditions

Table 1. Absolute maximum ratings

Symbol	Parameter		Value	Unit
V_{CC}	Supply voltage ⁽¹⁾		40	V
V_{id}	Differential input voltage ⁽²⁾		± 1	
V_{in}	Input voltage ⁽³⁾		$(V_{CC}^-) - 0.2$ to $(V_{CC}^+) + 0.2$	
I_{in}	Input current ⁽⁴⁾		10	mA
T_{stg}	Storage temperature		-65 to 150	°C
T_j	Maximum junction temperature		150	
R_{thja}	Thermal resistance junction to ambient ^{(5) (6)}	MiniSO8	190	°C/W
		DFN8 3x3	40	
		SO-8	125	
ESD	Human body model (HBM) ⁽⁷⁾		4	kV
	Machine model (MM) ⁽⁸⁾		100	V
	CDM: charged device model ⁽⁹⁾		1.5	kV
	Latch-up immunity		100	mA

1. All voltage values, except the differential voltage are with respect to network ground terminal.
2. Differential voltages are the non-inverting input terminal with respect to the inverting input terminal.
3. $V_{CC}-V_{in}$ must not exceed 40 V, V_{in} must not exceed 40 V.
4. Input current must be limited by a resistor in-series with the inputs.
5. R_{th} are typical values.
6. Short-circuits can cause excessive heating and destructive dissipation.
7. According to JEDEC standard JESD22-A114F.
8. According to JEDEC standard JESD22-A115A.
9. According to ANSI/ESD STM5.3.1.

Table 2. Operating conditions

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage	4 to 36	V
V_{icm}	Common mode input voltage range	$(V_{CC}^-) - 0.1$ to $(V_{CC}^+) + 0.1$	
T_{oper}	Operating free-air temperature range	-40 to 125	°C

3 Electrical characteristics

Table 3. Electrical characteristics at $V_{CC} = 4\text{ V}$, $V_{icm} = V_{CC}/2$, $T_{amb} = 25\text{ }^{\circ}\text{C}$, and R_L connected to $V_{CC}/2$ (unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	
DC performance							
V _{io}	Input offset voltage		-1.5		1.5	mV	
		-40 °C < T < 125 °C	-2.1		2.1		
ΔV _{io} /ΔT	Input offset voltage drift	-40 °C < T < 125 °C		1.5	6	μV/°C	
I _{io}	Input offset current			2	15	nA	
		-40 °C < T < 125 °C			35		
I _{ib}	Input bias current			8	30		
		-40 °C < T < 125 °C			70		
C _{IN}	Input capacitor			2		pF	
R _{IN}	Input impedance			1		TΩ	
CMR	Common mode rejection ratio 20 log (ΔV _{icm} /ΔV _{io})	V _{icm} = (V _{CC-}) to (V _{CC+}) - 1.5 V, V _{out} = V _{CC} /2	90	114		dB	
		-40 °C < T < 125 °C	80				
		V _{icm} = (V _{CC-}) to (V _{CC+}), V _{out} = V _{CC} /2	75	97			
		-40 °C < T < 125 °C	70				
A _{vd}	Large signal voltage gain	R _L = 10 kΩ, V _{out} = 0.5 to 3.5 V	90	100			
		-40 °C < T < 125 °C	85				
V _{OH}	High level output voltage (drop voltage from (V _{CC+}))	R _L = 10 kΩ		19	60	mV	
		-40 °C < T < 125 °C			80		
V _{OL}	Low level output voltage	R _L = 10 kΩ		12	50		
		-40 °C < T < 125 °C			70		
I _{out}	I _{sink}	V _{out} = V _{CC}	20	38		mA	
		-40 °C < T < 125 °C	5				
	I _{source}	V _{out} = 0 V	10	32			
		-40 °C < T < 125 °C	5				
I _{CC}	Supply current (per channel)	No load, V _{out} = V _{CC} /2		340	430	μA	
		-40 °C < T < 125 °C			500		
AC performance							
GBP	Gain bandwidth product	R _L = 10 kΩ, C _L = 100 pF	1.5	2.2		MHz	
		-40 °C < T < 125 °C	1.2				
ϕ _m	Phase margin	R _L = 10 kΩ, C _L = 100 pF		45		degrees	
G _m	Gain margin	R _L = 10 kΩ, C _L = 100 pF		5		dB	

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
SR	Negative slew rate	$V_{in} = 3.5 \text{ to } 0.5 \text{ V}$, $A_v = 1$, 10 % to 90 %, $R_L = 10 \text{ k}\Omega$, $C_L = 100 \text{ pF}$	0.50	0.78		V/ μ s
		$-40^\circ\text{C} < T < 125^\circ\text{C}$	0.37			
	Positive slew rate	$V_{in} = 0.5 \text{ to } 3.5 \text{ V}$, $A_v = 1$, 10 % to 90 %, $R_L = 10 \text{ k}\Omega$, $C_L = 100 \text{ pF}$	0.50	0.89		
		$-40^\circ\text{C} < T < 125^\circ\text{C}$	0.37			
e_n	Equivalent input noise voltage	$f = 1 \text{ kHz}$		20		nV/ $\sqrt{\text{Hz}}$
		$f = 0.1 \text{ Hz to } 10 \text{ Hz}$		0.7		μVpp
THD+N	Total harmonic distortion + noise	$f = 1 \text{ kHz}$, $V_{in} = 3.8 V_{pp}$, $R_L = 10 \text{ k}\Omega$, $C_L = 100 \text{ pF}$		0.001		%

Table 4. Electrical characteristics at $V_{CC} = 12 \text{ V}$, $V_{icm} = V_{CC}/2$, $T_{amb} = 25^\circ\text{C}$, and R_L connected to $V_{CC}/2$ (unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
DC performance						
V_{io}	Input offset voltage		-1.5		1.5	mV
		$-40^\circ\text{C} < T < 125^\circ\text{C}$	-2.1		2.1	
$\Delta V_{io}/\Delta T$	Input offset voltage drift	$-40^\circ\text{C} < T < 125^\circ\text{C}$		1.5	6	$\mu\text{V}/^\circ\text{C}$
I_{io}	Input offset current			2	15	nA
		$-40^\circ\text{C} < T < 125^\circ\text{C}$			35	
I_{ib}	Input bias current			8	30	
		$-40^\circ\text{C} < T < 125^\circ\text{C}$			70	
C_{IN}	Input capacitor			2		pF
R_{IN}	Input impedance			1		T Ω
CMR	Common mode rejection ratio 20 log ($\Delta V_{icm}/\Delta V_{io}$)	$V_{icm} = (V_{CC-}) \text{ to } (V_{CC+}) - 1.5 \text{ V}$, $V_{out} = V_{CC}/2$	100	123		dB
		$-40^\circ\text{C} < T < 125^\circ\text{C}$	90			
		$V_{icm} = (V_{CC-}) \text{ to } (V_{CC+})$, $V_{out} = V_{CC}/2$	85	106		
		$-40^\circ\text{C} < T < 125^\circ\text{C}$	80			
SVR	Supply voltage rejection ratio 20 log ($\Delta V_{CC}/\Delta V_{io}$)	$V_{CC} = 4 \text{ to } 12 \text{ V}$	90	99		
		$-40^\circ\text{C} < T < 125^\circ\text{C}$	80			
A_{vd}	Large signal voltage gain	$R_L = 10 \text{ k}\Omega$, $V_{out} = 0.5 \text{ to } 11.5 \text{ V}$	95	106		
		$-40^\circ\text{C} < T < 125^\circ\text{C}$	90			
V_{OH}	High level output voltage (drop voltage from V_{CC+})	$R_L = 10 \text{ k}\Omega$		38	100	mV
		$-40^\circ\text{C} < T < 125^\circ\text{C}$			150	
V_{OL}	Low level output voltage	$R_L = 10 \text{ k}\Omega$		16	70	
		$-40^\circ\text{C} < T < 125^\circ\text{C}$			90	
I_{out}	I_{sink}	$V_{out} = V_{CC}$	20	42		mA
		$-40^\circ\text{C} < T < 125^\circ\text{C}$	8			
	I_{source}	$V_{out} = 0 \text{ V}$	15	35		
		$-40^\circ\text{C} < T < 125^\circ\text{C}$	7			

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _{CC}	Supply current (per channel)	No load, V _{out} = V _{CC} /2		360	450	μA
		-40 °C < T < 125 °C			530	
AC performance						
GBP	Gain bandwidth product	R _L = 10 kΩ, C _L = 100 pF	1.6	2.4		MHz
		-40 °C < T < 125 °C	1.3			
ϕ _m	Phase margin	R _L = 10 kΩ, C _L = 100 pF		50		degrees
G _m	Gain margin	R _L = 10 kΩ, C _L = 100 pF		6		dB
SR	Negative slew rate	V _{in} = 10.5 to 1.5 V, A _v = 1, 10 % to 90 %, R _L = 10 kΩ, C _L = 100 pF	0.53	0.82		V/μs
		-40 °C < T < 125 °C	0.40			
	Positive slew rate	V _{in} = 1.5 to 10.5 V, A _v = 1, 10 % to 90 %, R _L = 10 kΩ, C _L = 100 pF	0.55	0.92		
		-40 °C < T < 125 °C	0.40			
e _n	Equivalent input noise voltage	f = 1 kHz		20		nV/√Hz
		f = 0.1 Hz to 10 Hz		0.7		μVpp
THD+N	Total harmonic distortion + noise	f = 1 kHz, V _{in} = 7 V _{pp} , R _L = 10 kΩ, C _L = 100 pF		0.0005		%

Table 5. Electrical characteristics at $V_{CC} = 36\text{ V}$, $V_{icm} = V_{CC}/2$, $T_{amb} = 25^{\circ}C$, and R_L connected to $V_{CC}/2$ (unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
DC performance						
V_{io}	Input offset voltage		-1.5		1.5	mV
		$-40^{\circ}C < T < 125^{\circ}C$	-2.1		2.1	
$\Delta V_{io}/\Delta T$	Input offset voltage drift	$-40^{\circ}C < T < 125^{\circ}C$		1.5	6	$\mu V/^{\circ}C$
ΔV_{io}	Long-term input offset voltage drift ⁽¹⁾	$T = 25^{\circ}C$		1.5		$\mu V/\sqrt{\text{month}}$
I_{io}	Input offset current			2	15	nA
		$-40^{\circ}C < T < 125^{\circ}C$			35	
I_{ib}	Input bias current			8	30	
		$-40^{\circ}C < T < 125^{\circ}C$			70	
C_{IN}	Input capacitor			2		pF
R_{IN}	Input impedance			1		T Ω
CMR	Common mode rejection ratio 20 log ($\Delta V_{icm}/\Delta V_{io}$)	$V_{icm} = (V_{CC-})\text{ to } (V_{CC+}) - 1.5\text{ V}$, $V_{out} = V_{CC}/2$	105	129		dB
		$-40^{\circ}C < T < 125^{\circ}C$	95			
		$V_{icm} = (V_{CC-})\text{ to } (V_{CC+})$, $V_{out} = V_{CC}/2$	95	115		
		$-40^{\circ}C < T < 125^{\circ}C$	90			
SVR	Supply voltage rejection ratio 20 log ($\Delta V_{CC}/\Delta V_{io}$)	$V_{CC} = 4\text{ to }36\text{ V}$	90	104		
		$-40^{\circ}C < T < 125^{\circ}C$	85			
A_{vd}	Large signal voltage gain	$R_L = 10\text{ k}\Omega$, $V_{out} = 0.5\text{ to }35.5\text{ V}$	95	114		
		$-40^{\circ}C < T < 125^{\circ}C$	90			

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{OH}	High level output voltage (drop voltage from V _{CC+})	R _L = 10 kΩ		78	150	mV
		-40 °C < T < 125 °C			200	
V _{OL}	Low level output voltage	R _L = 10 kΩ		30	90	
		-40 °C < T < 125 °C			120	
I _{out}	I _{sink}	V _{out} = V _{CC}	25	65		mA
		-40 °C < T < 125 °C	10			
	I _{source}	V _{out} = 0 V	20	50		
		-40 °C < T < 125 °C	10			
I _{CC}	Supply current (per channel)	No load, V _{out} = V _{CC} /2		380	470	μA
		-40 °C < T < 125 °C			550	
AC performance						
GBP	Gain bandwidth product	R _L = 10 kΩ, C _L = 100 pF	1.7	2.5		MHz
		-40 °C < T < 125 °C	1.4			
ϕ _m	Phase margin	R _L = 10 kΩ, C _L = 100 pF		50		degrees
G _m	Gain margin	R _L = 10 kΩ, C _L = 100 pF		8		dB
SR	Negative slew rate	V _{in} = 22.5 to 13.5 V, A _v = 1, 10 % to 90 %, R _L = 10 kΩ, C _L = 100 pF	0.57	0.88		V/μs
		-40 °C < T < 125 °C	0.44			
	Positive slew rate	V _{in} = 13.5 to 22.5 V, A _v = 1, 10 % to 90 %, R _L = 10 kΩ, C _L = 100 pF	0.60	1.00		
		-40 °C < T < 125 °C	0.44			
e _n	Equivalent input noise voltage	f = 1 kHz		20		nV/√Hz
		f = 0.1 Hz to 10 Hz		0.7		μVpp
THD+N	Total harmonic distortion + noise	f = 1 kHz, V _{in} = 7 V _{pp} , R _L = 10 kΩ, C _L = 100 pF		0.001		%

1. Typical value is based on the V_{IO} drift observed after 1000h at 125 °C extrapolated to 25 °C using Arrhenius law and assuming an activation energy of 0.7 eV. The operational amplifier is aged in follower mode configuration (see [Section 4.5 Long term input offset voltage drift](#)).

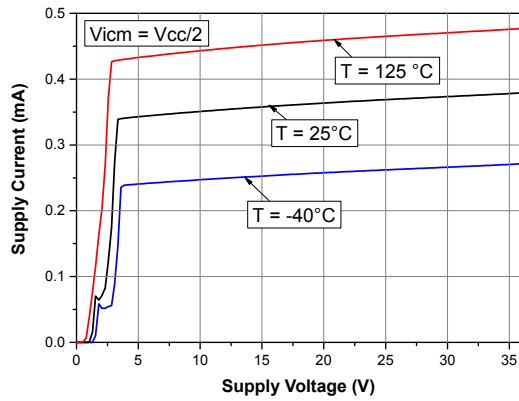
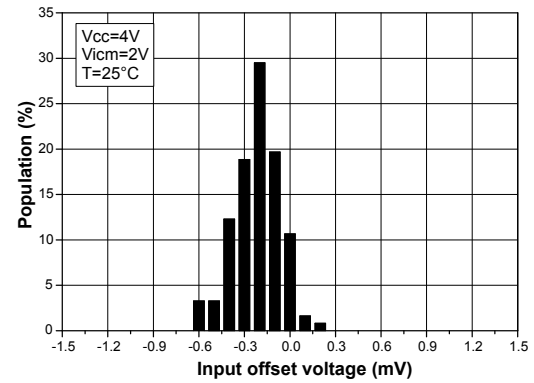
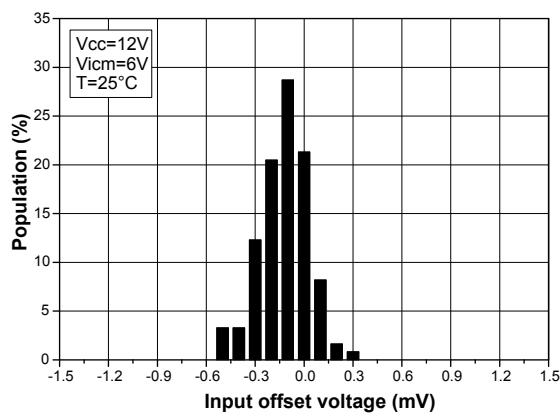
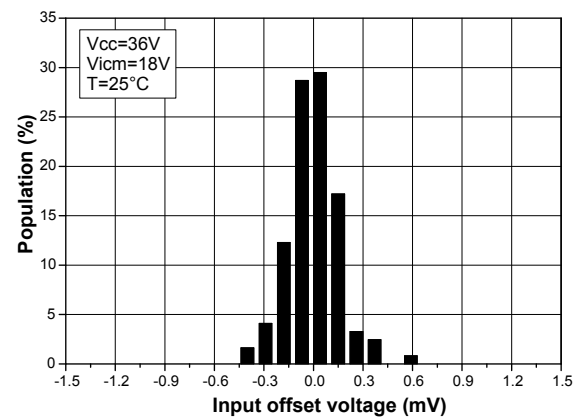
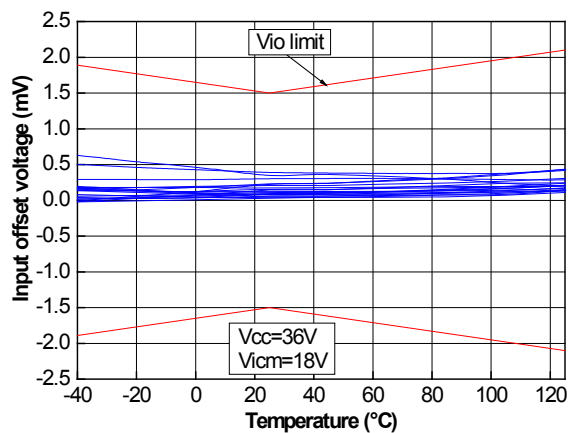
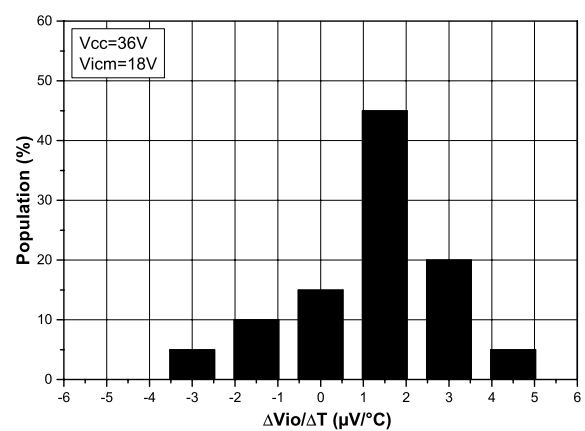
Figure 3. Supply current vs. supply voltage

Figure 4. Input offset voltage distribution at $V_{CC} = 4\text{ V}$

Figure 5. Input offset voltage distribution at $V_{CC} = 12\text{ V}$

Figure 6. Input offset voltage distribution at $V_{CC} = 36\text{ V}$

Figure 7. Input offset voltage vs. temperature at $V_{CC} = 36\text{ V}$

Figure 8. Input offset voltage temperature variation distribution at $V_{CC} = 36\text{ V}$


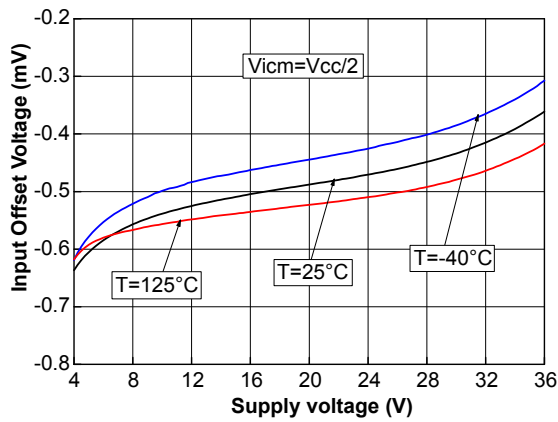
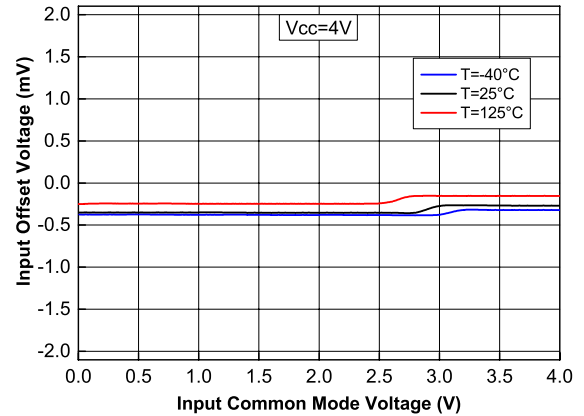
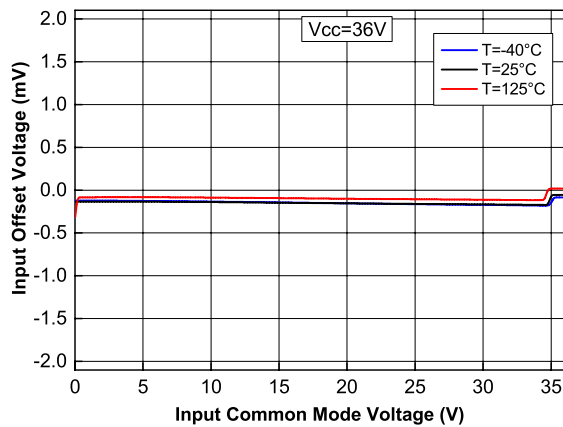
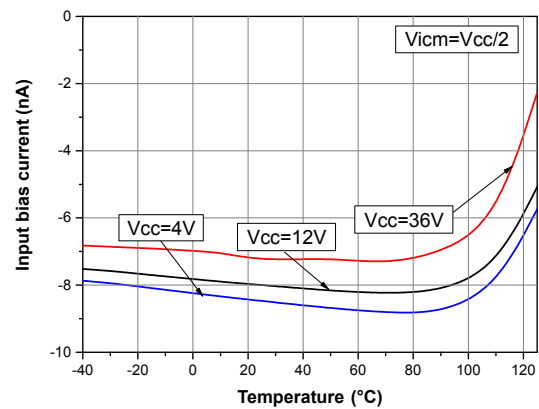
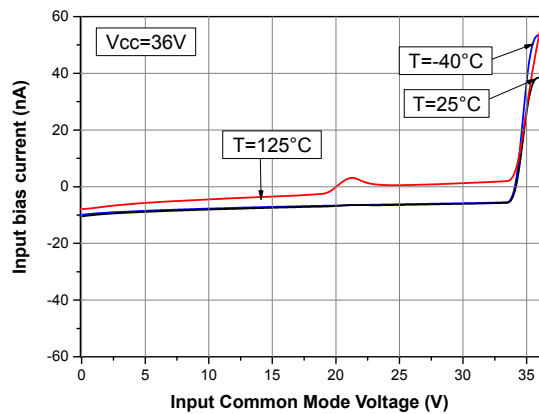
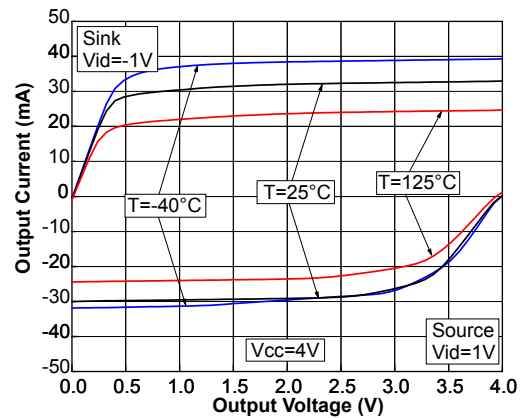
Figure 9. Input offset voltage vs. supply voltage

Figure 10. Input offset voltage vs. common-mode voltage at $V_{CC} = 4\text{ V}$

Figure 11. Input offset voltage vs. common-mode voltage at $V_{CC} = 36\text{ V}$

Figure 12. Input bias current vs. temperature at $V_{ICM} = V_{CC}/2$

Figure 13. Input bias current vs. common-mode voltage at $V_{CC} = 36\text{ V}$

Figure 14. Output current vs. output voltage at $V_{CC} = 4\text{ V}$


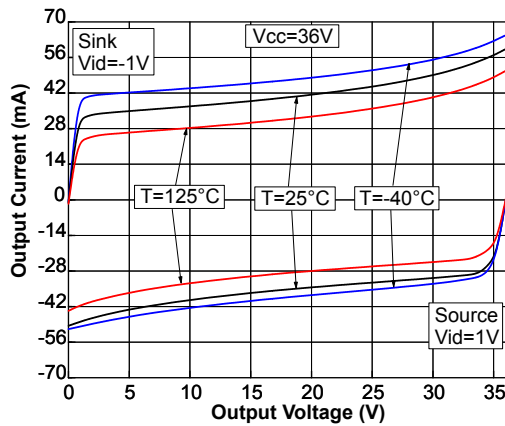
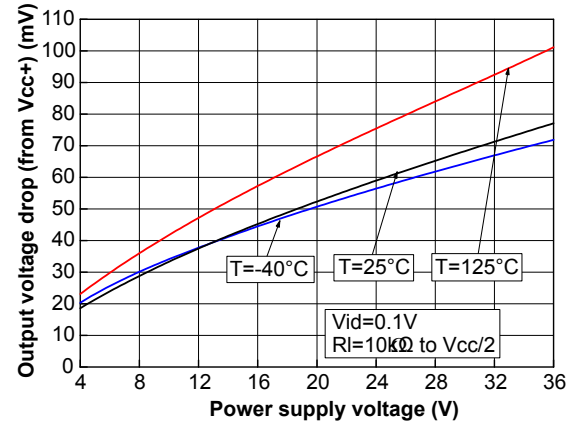
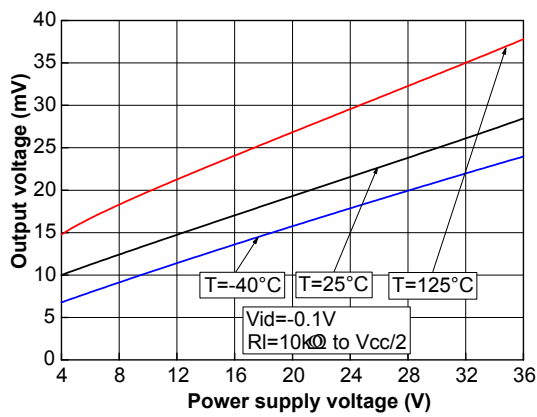
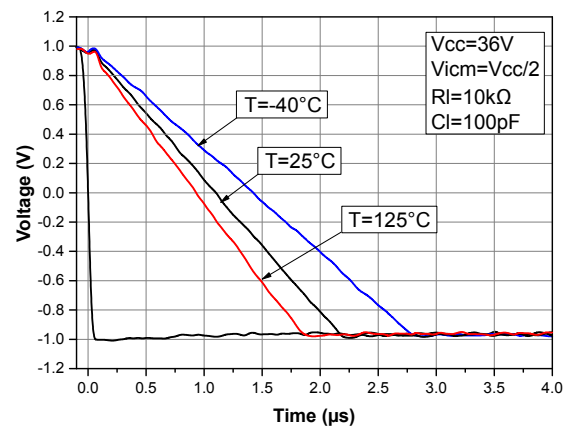
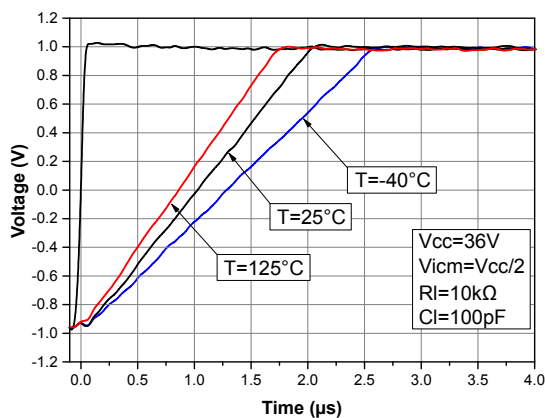
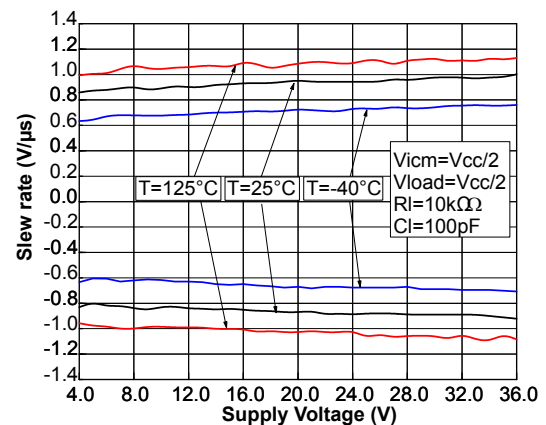
Figure 15. Output current vs. output voltage at $V_{CC} = 36\text{ V}$

Figure 16. Output voltage (V_{oh}) vs. supply voltage

Figure 17. Output voltage (V_{ol}) vs. supply voltage

Figure 18. Negative slew rate at $V_{CC} = 36\text{ V}$

Figure 19. Positive slew rate at $V_{CC} = 36\text{ V}$

Figure 20. Slew rate vs. supply voltage


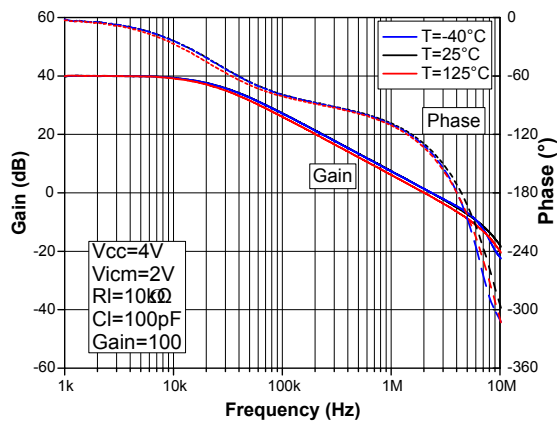
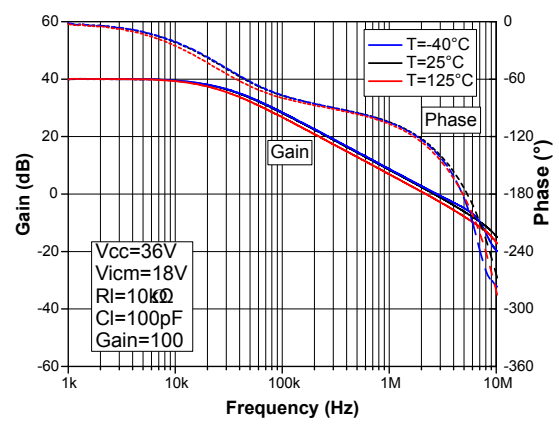
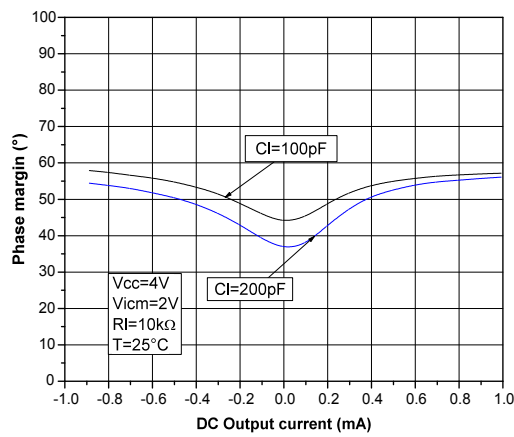
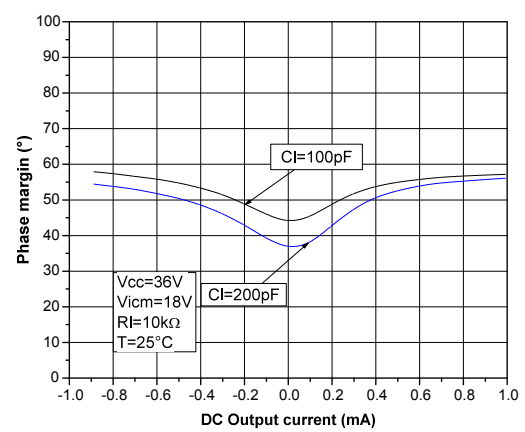
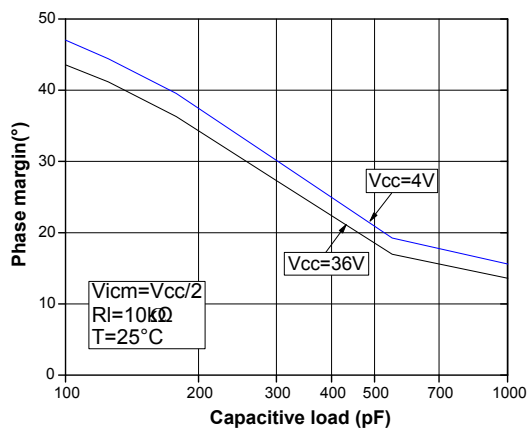
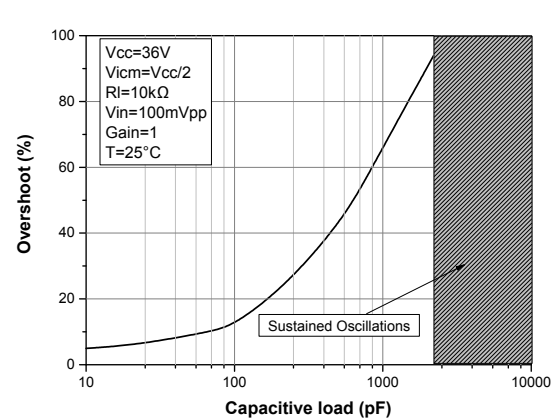
Figure 21. Bode diagram at $V_{CC} = 4\text{ V}$

Figure 22. Bode diagram at $V_{CC} = 36\text{ V}$

Figure 23. Phase margin vs. output current at $V_{CC} = 4\text{ V}$

Figure 24. Phase margin vs. output current at $V_{CC} = 36\text{ V}$

Figure 25. Phase margin vs. capacitive load

Figure 26. Overshoot vs. capacitive load at $V_{CC} = 36\text{ V}$


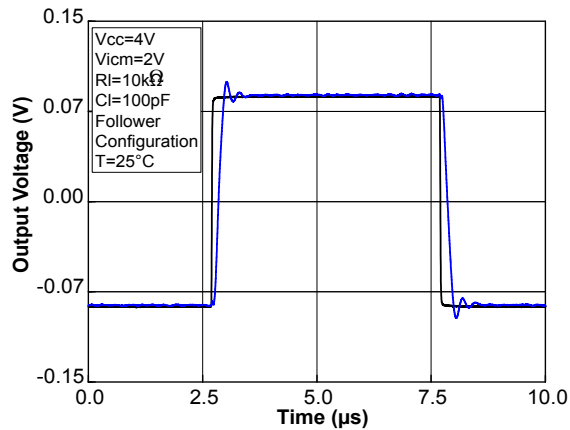
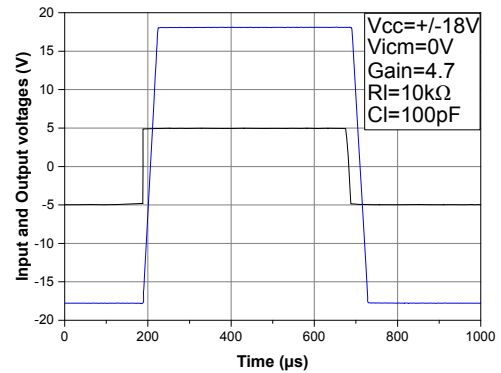
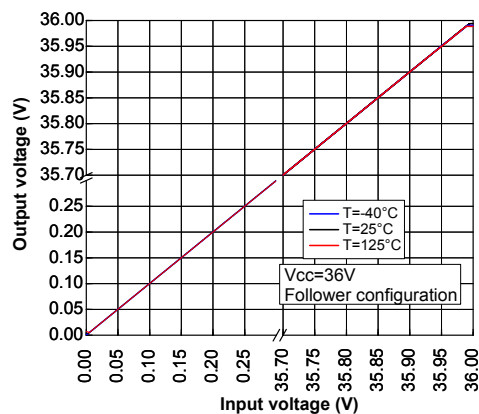
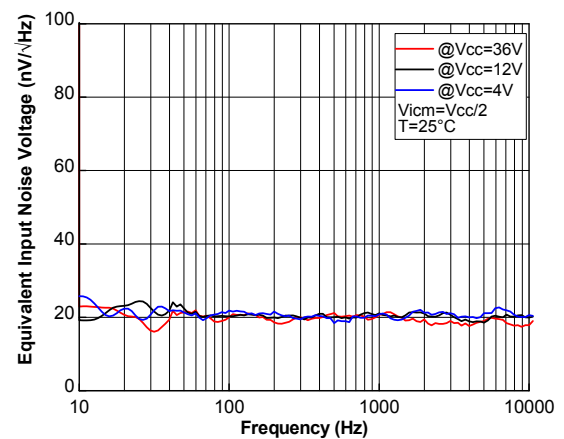
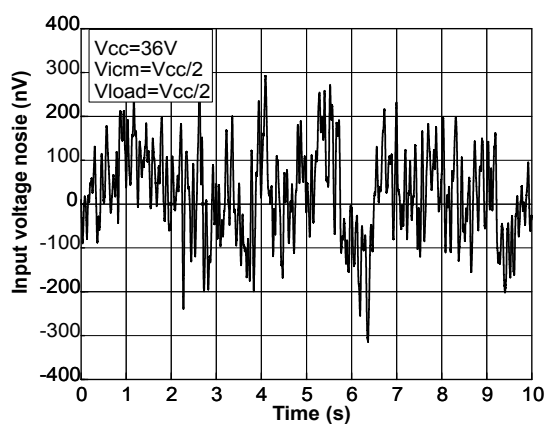
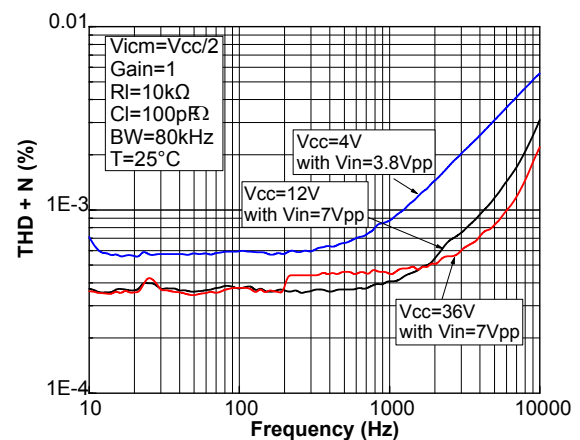
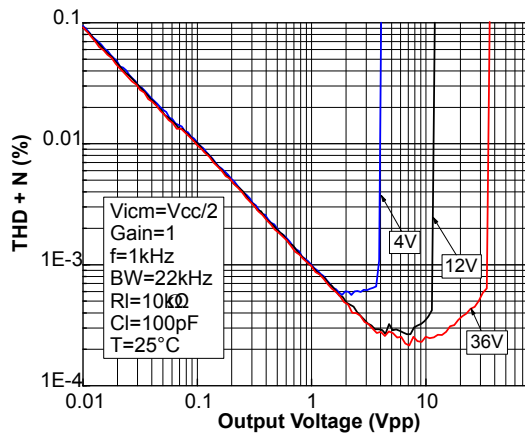
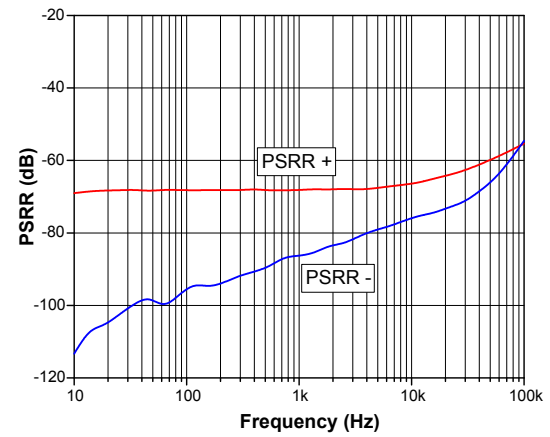
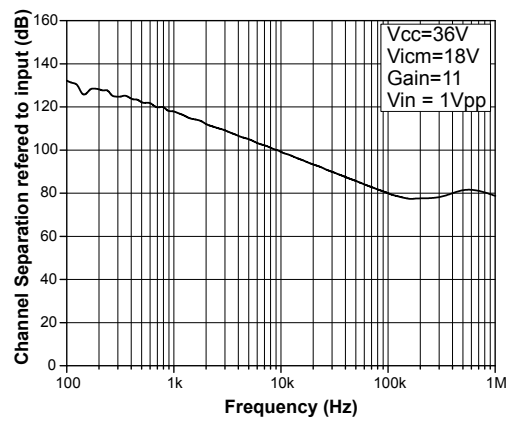
Figure 27. Small step response vs. time at $V_{CC} = 4\text{ V}$

Figure 28. Output desaturation vs. time

Figure 29. Amplifier behavior close to the rails at $V_{CC} = 36\text{ V}$

Figure 30. Noise vs. frequency at $V_{CC} = 36\text{ V}$

Figure 31. Noise vs. time at $V_{CC} = 36\text{ V}$

Figure 32. THD+N vs. frequency


Figure 33. THD+N vs. output voltage

Figure 34. PSRR vs. frequency at $V_{CC} = 36\text{ V}$

Figure 35. Channel separation vs. frequency at $V_{CC} = 36\text{ V}$


4.1 Operating voltages

The TSB572 can operate from 4 V to 36 V. The parameters are fully specified for 4 V, 12 V, and 36 V power supplies. However, the parameters are stable in the full V_{CC} range. Additionally, the main specifications are guaranteed in extended temperature ranges from -40 to 125 °C.


4.2 Input pin voltage ranges

The TSB572 has internal ESD diode protection on the inputs. These diodes are connected between the inputs and each supply rail to protect the input transistors from electrical discharge.

If the input pin voltage exceeds the power supply by 0.2 V, the ESD diodes become conductive and excessive current can flow through them. Without limitation this over current can damage the device.

In this case, it is important to limit the current to 10 mA, by adding resistance on the input pin, as shown in [Figure 36. Input current limitation](#).

Figure 36. Input current limitation

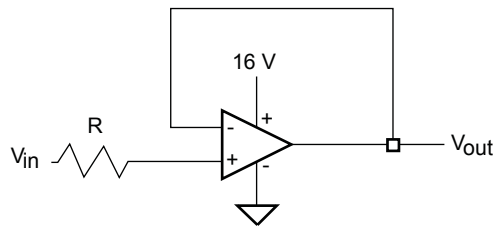

4.3 Rail-to-rail input

The TSB572 has rail-to-rail inputs. The input common mode range is extended from $(V_{CC-}) - 0.1$ V to $(V_{CC+}) + 0.1$ V at $T = 25$ °C.

4.4 Input offset voltage drift over temperature

The maximum input voltage drift variation over temperature is defined as the offset variation related to the offset value measured at 25 °C. The operational amplifier is one of the main circuits of the signal conditioning chain, and the amplifier input offset is a major contributor to the chain accuracy. The signal chain accuracy at 25 °C can be compensated during production at application level. The maximum input voltage drift over temperature enables the system designer to anticipate the effect of temperature variations.

The maximum input voltage drift over temperature is computed using .

Equation 1

$$\frac{\Delta V_{io}}{\Delta T} = \max \left| \frac{V_{io}(T) - V_{io}(25\text{ °C})}{T - 25\text{ °C}} \right|$$

where $T = -40$ °C and 125 °C.

The TSB572 datasheet maximum value is guaranteed by measurements on a representative sample size ensuring a C_{pk} (process capability index) greater than 1.3.

4.5 Long term input offset voltage drift

To evaluate product reliability, two types of stress acceleration are used:

- Voltage acceleration, by changing the applied voltage

- Temperature acceleration, by changing the die temperature (below the maximum junction temperature allowed by the technology) with the ambient temperature.

The voltage acceleration has been defined based on JEDEC results, and is defined using .

Equation 2

$$A_{FV} = e^{\beta \cdot (V_S - V_U)}$$

Where:

A_{FV} is the voltage acceleration factor

β is the voltage acceleration constant in 1/V, constant technology parameter ($\beta = 1$)

V_S is the stress voltage used for the accelerated test

V_U is the voltage used for the application

The temperature acceleration is driven by the Arrhenius model, and is defined in .

Equation 3

$$A_{FT} = e^{\frac{E_a}{k} \cdot \left(\frac{1}{T_U} - \frac{1}{T_S} \right)}$$

Where:

A_{FT} is the temperature acceleration factor

E_a is the activation energy of the technology based on the failure rate

k is the Boltzmann constant ($8.6173 \times 10^{-5} \text{ eV.K}^{-1}$)

T_U is the temperature of the die when V_U is used (K)

T_S is the temperature of the die under temperature stress (K)

The final acceleration factor, A_F , is the multiplication of the voltage acceleration factor and the temperature acceleration factor ().

Equation 4

$$A_F = A_{FT} \times A_{FV}$$

A_F is calculated using the temperature and voltage defined in the mission profile of the product. The A_F value can then be used in to calculate the number of months of use equivalent to 1000 hours of reliable stress duration.

Equation 5

$$\text{Months} = A_F \times 1000 \text{ h} \times 12 \text{ months} / (24 \text{ h} \times 365.25 \text{ days})$$

To evaluate the op amp reliability, a follower stress condition is used where V_{CC} is defined as a function of the maximum operating voltage and the absolute maximum rating (as recommended by JEDEC rules).

The V_{io} drift (in μV) of the product after 1000 h of stress is tracked with parameters at different measurement conditions (see).

Equation 6

$$V_{CC} = \max V_{op} \text{ with } V_{icm} = V_{CC} / 2$$

The long term drift parameter (ΔV_{io}), estimating the reliability performance of the product, is obtained using the ratio of the V_{io} (input offset voltage value) drift over the square root of the calculated number of months ().

Equation 7

$$\Delta V_{io} = \frac{V_{io} \text{ drift}}{\sqrt{(\text{months})}}$$

Where V_{io} drift is the measured drift value in the specified test conditions after 1000 h stress duration.

4.6 Capacitive load

Driving large capacitive loads can cause stability problems. Increasing the load capacitance produces gain peaking in the frequency response, with overshoot and ringing in the step response. It is usually considered that with a gain peaking higher than 2.3 dB an op amp might become unstable.

Generally, unity gain configuration is the worst situation for stability and the ability to drive large capacitive loads.

Figure 37. Stability criteria with a serial resistor at different supply voltages shows the serial resistor that must be added to the output, to make a system stable. Figure 38. Test configuration for Riso shows the test configuration using an isolation resistor, Riso.

Figure 37. Stability criteria with a serial resistor at different supply voltages


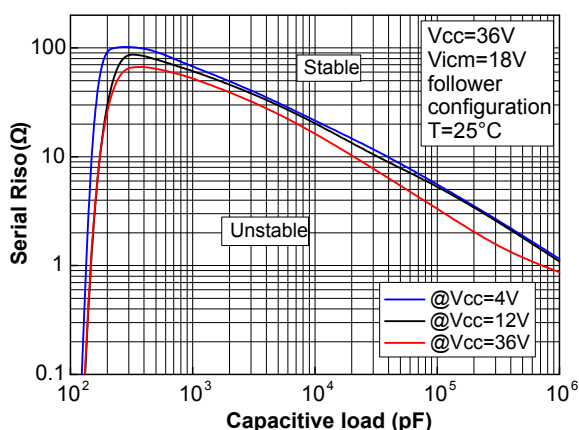


Figure 38. Test configuration for Riso

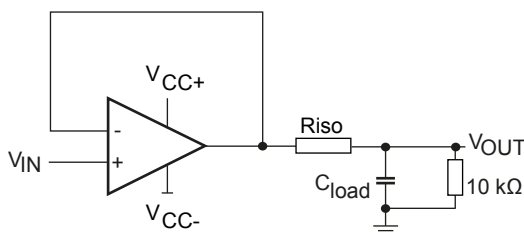

4.7 PCB layout recommendations

Particular attention must be paid to the layout of the PCB tracks connected to the amplifier, load, and power supply. The power and ground traces are critical as they must provide adequate energy and grounding for all circuits. The best practice is to use short and wide PCB traces to minimize voltage drops and parasitic inductance.

In addition, to minimizing parasitic impedance over the entire surface, a multi-via technique that connects the bottom and top layer ground planes together in many locations is often used.

The copper traces that connect the output pins to the load and supply pins should be as wide as possible to minimize trace resistance.

4.8 Optimized application recommendation

It is recommended to place a 22 nF capacitor as close as possible to the supply pin. A good decoupling will help to reduce electromagnetic interference impact.

5 **Package information**

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

5.1 MiniSO8 package information

Figure 39. MiniSO8 package outline

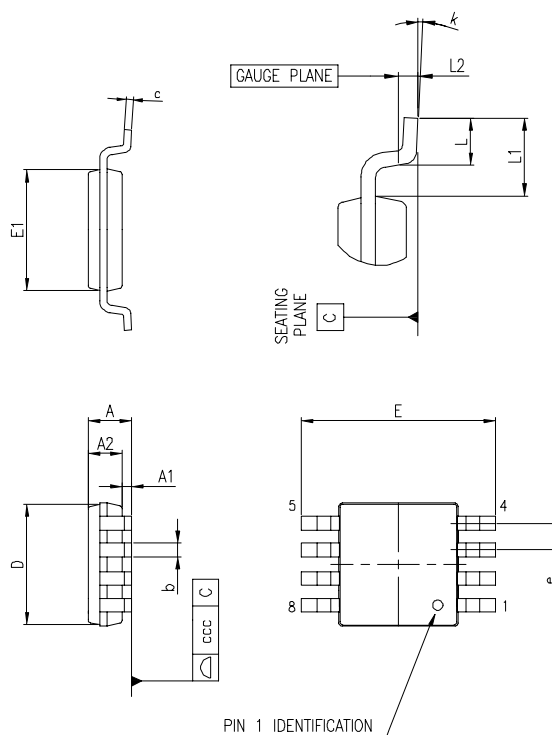


Table 6. MiniSO8 mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.1			0.043
A1	0		0.15	0		0.006
A2	0.75	0.85	0.95	0.030	0.033	0.037
b	0.22		0.40	0.009		0.016
c	0.08		0.23	0.003		0.009
D	2.80	3.00	3.20	0.11	0.118	0.126
E	4.65	4.90	5.15	0.183	0.193	0.203
E1	2.80	3.00	3.10	0.11	0.118	0.122
e		0.65			0.026	
L	0.40	0.60	0.80	0.016	0.024	0.031
L1		0.95			0.037	
L2		0.25			0.010	
k	0°		8°	0°		8°
ccc			0.10			0.004

5.2 DFN8 3x3 package information

Figure 40. DFN8 3x3 package outline and mechanical data

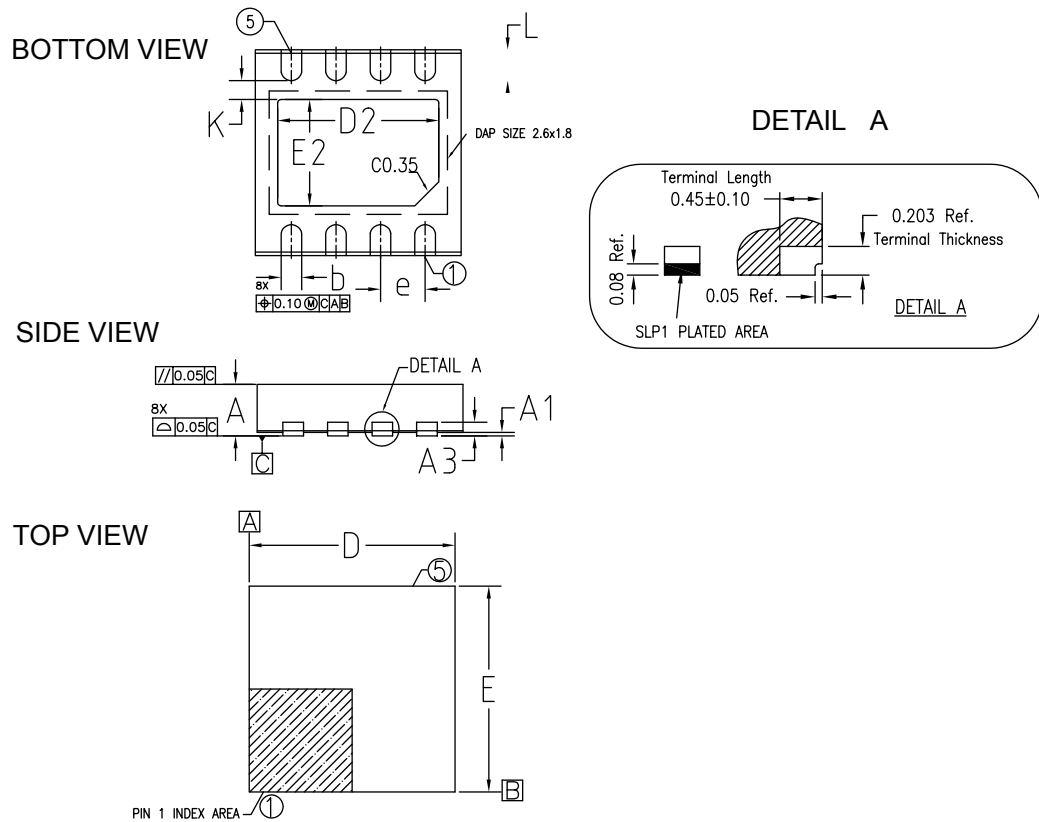
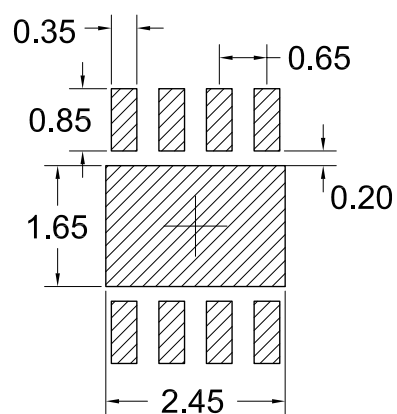


Table 7. DFN8 3x3 mechanical data

Symbol	mm		
	Min.	Typ.	Max.
A	0.70	0.75	0.80
A1	0.0		0.05
A3	0.20 Ref.		
b	0.25	0.30	0.35
D	2.95	3.00	3.05
D2	2.25	2.35	2.45
e	0.65 BSC		
E	2.95	3.00	3.05
E2	1.45	1.55	1.65
L	0.35	0.45	0.55
K	2.75 Ref.		
N	8		

Figure 41. DFN8 3x3 footprint data


5.3 SO-8 package information

Figure 42. SO-8 package outline

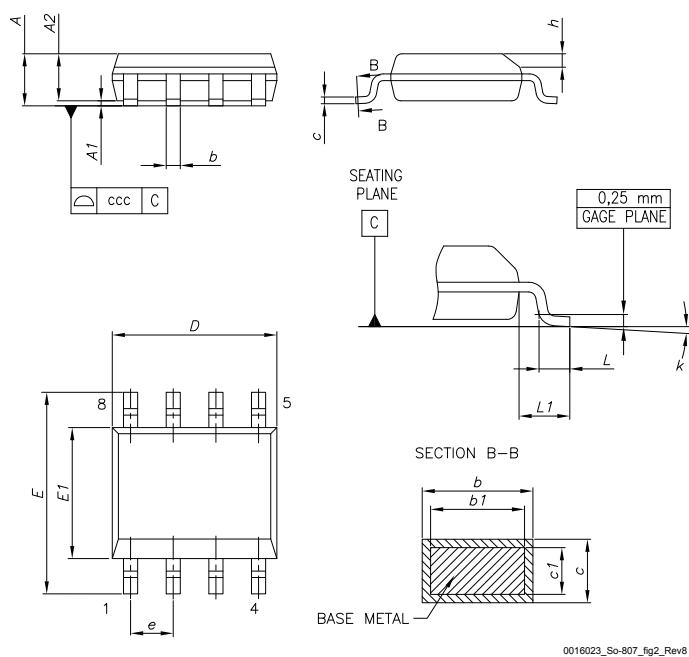


Table 8. SO-8 mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A			1.75
A1	0.10		0.25
A2	1.25		
b	0.31		0.51
b1	0.28		0.48
c	0.10		0.25
c1	0.10		0.23
D	4.80	4.90	5.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e		1.27	
h	0.25		0.50
L	0.40		1.27
L1		1.04	
L2		0.25	
k	0°		8°
ccc			0.10

6 Ordering information

Table 9. Order codes

Order code	Temperature range	Package	Packing	Marking
TSB572IQ2T	-40 °C to 125 °C	DFN8 3x3	Tape and reel	K31
TSB572IYQ2T ⁽¹⁾				K32
TSB572IST		MiniSO8		K31
TSB572IYST ⁽¹⁾				K32
TSB572IDT		SO8 package		TSB572I

1. Automotive qualification according to AEC-Q100.

Revision history

Table 10. Document revision history

Date	Version	Changes
12-Oct-2015	1	Initial release
17-Dec-2015	2	Section 2: "Absolute maximum ratings and operating conditions": updated ESD, MM value. Section 6: "Ordering information": removed footnote (1) from order code TSB572IQ2T
26-Jun-2017	3	In <i>Table 1</i> : " <i>Absolute maximum ratings</i> ": - Updated Latch-up immunity Parameter Value - updated footnote (3)
10-Nov-2017	4	Added: new SO-8 Package information and new order code TSB572IDT Section 6 Ordering information
26-Mar-2018	5	Updated: Section 5.2 DFN8 3x3 package information

Contents

1	Package pin connections	2
2	Absolute maximum ratings and operating conditions	3
3	Electrical characteristics	4
4	Application information	0
4.1	Operating voltages	14
4.2	Input pin voltage ranges	14
4.3	Rail-to-rail input	14
4.4	Input offset voltage drift over temperature	14
4.5	Long term input offset voltage drift	14
4.6	Capacitive load	15
4.7	PCB layout recommendations	16
4.8	Optimized application recommendation	16
5	Package information	17
5.1	MiniSO8 package information	18
5.2	DFN8 3x3 package information	18
5.3	SO-8 package information	21
6	Ordering information	22
	Revision history	23
	Contents	24
	List of tables	25
	List of figures	26
	Disclaimer	27

List of tables

Table 1.	Absolute maximum ratings	3
Table 2.	Operating conditions	3
Table 3.	Electrical characteristics at $V_{CC} = 4\text{ V}$, $V_{ICM} = V_{CC}/2$, $T_{amb} = 25\text{ }^{\circ}\text{C}$, and R_L connected to $V_{CC}/2$ (unless otherwise specified)	4
Table 4.	Electrical characteristics at $V_{CC} = 12\text{ V}$, $V_{ICM} = V_{CC}/2$, $T_{amb} = 25\text{ }^{\circ}\text{C}$, and R_L connected to $V_{CC}/2$ (unless otherwise specified)	5
Table 5.	Electrical characteristics at $V_{CC} = 36\text{ V}$, $V_{ICM} = V_{CC}/2$, $T_{amb} = 25\text{ }^{\circ}\text{C}$, and R_L connected to $V_{CC}/2$ (unless otherwise specified)	6
Table 6.	MiniSO8 mechanical data	18
Table 7.	DFN8 3x3 mechanical data	19
Table 8.	SO-8 mechanical data	21
Table 9.	Order codes	22
Table 10.	Document revision history	23

List of figures

Figure 2.	Pin connections for each package (top view)	2
Figure 3.	Supply current vs. supply voltage	8
Figure 4.	Input offset voltage distribution at $V_{CC} = 4\text{ V}$	8
Figure 5.	Input offset voltage distribution at $V_{CC} = 12\text{ V}$	8
Figure 6.	Input offset voltage distribution at $V_{CC} = 36\text{ V}$	8
Figure 7.	Input offset voltage vs. temperature at $V_{CC} = 36\text{ V}$	8
Figure 8.	Input offset voltage temperature variation distribution at $V_{CC} = 36\text{ V}$	8
Figure 9.	Input offset voltage vs. supply voltage	9
Figure 10.	Input offset voltage vs. common-mode voltage at $V_{CC} = 4\text{ V}$	9
Figure 11.	Input offset voltage vs. common-mode voltage at $V_{CC} = 36\text{ V}$	9
Figure 12.	Input bias current vs. temperature at $V_{ICM} = V_{CC}/2$	9
Figure 13.	Input bias current vs. common-mode voltage at $V_{CC} = 36\text{ V}$	9
Figure 14.	Output current vs. output voltage at $V_{CC} = 4\text{ V}$	9
Figure 15.	Output current vs. output voltage at $V_{CC} = 36\text{ V}$	10
Figure 16.	Output voltage (V_{oh}) vs. supply voltage	10
Figure 17.	Output voltage (V_{ol}) vs. supply voltage	10
Figure 18.	Negative slew rate at $V_{CC} = 36\text{ V}$	10
Figure 19.	Positive slew rate at $V_{CC} = 36\text{ V}$	10
Figure 20.	Slew rate vs. supply voltage	10
Figure 21.	Bode diagram at $V_{CC} = 4\text{ V}$	11
Figure 22.	Bode diagram at $V_{CC} = 36\text{ V}$	11
Figure 23.	Phase margin vs. output current at $V_{CC} = 4\text{ V}$	11
Figure 24.	Phase margin vs. output current at $V_{CC} = 36\text{ V}$	11
Figure 25.	Phase margin vs. capacitive load	11
Figure 26.	Overshoot vs. capacitive load at $V_{CC} = 36\text{ V}$	11
Figure 27.	Small step response vs. time at $V_{CC} = 4\text{ V}$	12
Figure 28.	Output desaturation vs. time.	12
Figure 29.	Amplifier behavior close to the rails at $V_{CC} = 36\text{ V}$	12
Figure 30.	Noise vs. frequency at $V_{CC} = 36\text{ V}$	12
Figure 31.	Noise vs. time at $V_{CC} = 36\text{ V}$	12
Figure 32.	THD+N vs. frequency	12
Figure 33.	THD+N vs. output voltage	13
Figure 34.	PSRR vs. frequency at $V_{CC} = 36\text{ V}$	13
Figure 35.	Channel separation vs. frequency at $V_{CC} = 36\text{ V}$	13
Figure 36.	Input current limitation	14
Figure 37.	Stability criteria with a serial resistor at different supply voltages	16
Figure 38.	Test configuration for Riso	16
Figure 39.	MiniSO8 package outline	18
Figure 40.	DFN8 3x3 package outline and mechanical data.	19
Figure 41.	DFN8 3x3 footprint data.	20
Figure 42.	SO-8 package outline	21

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved