


## The RF MOSFET Line

### 45W, 150MHz, 28V

Rev. V1

Designed primarily for wideband large-signal output and driver stages from 30–200 MHz.

### Product Image

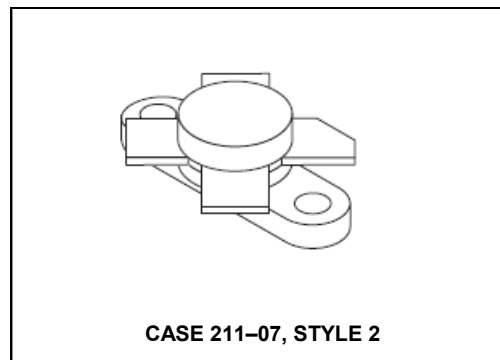


N-Channel enhancement mode MOSFET

- Guaranteed performance at 150 MHz, 28 Vdc
  - Output power = 45 W
  - Power gain = 17 dB (min)
  - Efficiency = 60% (min)
- Excellent thermal stability, ideally suited for Class A operation
- Facilitates manual gain control, ALC and modulation techniques
- 100% tested for load mismatch at all phase angles with 30:1 VSWR
- Low  $C_{rss}$  – 8 pF @  $V_{DS} = 28$  V
- Gold top metal

Typical data for power amplifier applications in industrial, commercial and amateur radio equipment

- Typical performance at 30 MHz, 28 Vdc
  - Output power = 30 W (PEP)
  - Power gain = 20 dB (typ.)
  - Efficiency = 50% (typ.)
  - IMD(d3) (30 W PEP) –32 dB (typ.)



### MAXIMUM RATINGS

| Rating                                                                                 | Symbol    | Value       | Unit                         |
|----------------------------------------------------------------------------------------|-----------|-------------|------------------------------|
| Drain–Gate Voltage                                                                     | $V_{DSS}$ | 65          | Vdc                          |
| Drain–Gate Voltage ( $R_{GS} = 1.0\text{ M}\Omega$ )                                   | $V_{DGR}$ | 65          | Vdc                          |
| Gate–Source Voltage                                                                    | $V_{GS}$  | $\pm 20$    | Adc                          |
| Drain Current — Continuous                                                             | $I_D$     | 4.5         | Adc                          |
| Total Device Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$     | 115<br>0.66 | Watts<br>W/ $^\circ\text{C}$ |
| Storage Temperature Range                                                              | $T_{stg}$ | –65 to +150 | $^\circ\text{C}$             |
| Operating Junction Temperature                                                         | $T_J$     | 200         | $^\circ\text{C}$             |

### THERMAL CHARACTERISTICS

| Characteristic                       | Symbol          | Max  | Unit               |
|--------------------------------------|-----------------|------|--------------------|
| Thermal Resistance, Junction to Case | $R_{\theta JC}$ | 1.52 | $^\circ\text{C/W}$ |

### ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|                                                                              |               |    |    |     |                 |
|------------------------------------------------------------------------------|---------------|----|----|-----|-----------------|
| Drain–Source Breakdown Voltage<br>( $I_D = 50\text{ mA}$ , $V_{GS} = 0$ )    | $V_{(BR)DSS}$ | 65 | 80 | —   | Vdc             |
| Zero Gate Voltage Drain Current<br>( $V_{GS} = 0$ , $V_{DS} = 28\text{ V}$ ) | $I_{DSS}$     | —  | —  | 1.0 | mAdc            |
| Gate–Source Leakage Current<br>( $V_{GS} = 20\text{ V}$ , $V_{DS} = 0$ )     | $I_{GSS}$     | —  | —  | 1.0 | $\mu\text{Adc}$ |

**NOTE – CAUTION** – MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.

**The RF MOSFET Line**  
**45W, 150MHz, 28V**

Rev. V1

**ELECTRICAL CHARACTERISTICS – continued** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

**ON CHARACTERISTICS**

|                                                                             |              |     |     |     |      |
|-----------------------------------------------------------------------------|--------------|-----|-----|-----|------|
| Gate Threshold Voltage<br>( $V_{DS} = 10\text{ V}$ , $I_D = 50\text{ mA}$ ) | $V_{GS(th)}$ | 1.5 | 2.5 | 4.5 | Vdc  |
| Drain-Source On-Voltage<br>( $V_{GS} = 10\text{ V}$ , $I_D = 3\text{ A}$ )  | $V_{DS(on)}$ | —   | 1.0 | —   | V    |
| Forward Transconductance<br>( $V_{DS} = 10\text{ V}$ , $I_D = 2\text{ A}$ ) | $g_{fs}$     | 1.4 | 1.8 | —   | mhos |

**DYNAMIC CHARACTERISTICS**


|                                                                                                  |           |   |    |   |    |
|--------------------------------------------------------------------------------------------------|-----------|---|----|---|----|
| Input Capacitance<br>( $V_{DS} = 28\text{ V}$ , $V_{GS} = 0$ , $f = 1.0\text{ MHz}$ )            | $C_{iss}$ | — | 60 | — | pF |
| Output Capacitance<br>( $V_{DS} = 28\text{ V}$ , $V_{GS} = 0$ , $f = 1.0\text{ MHz}$ )           | $C_{oss}$ | — | 70 | — | pF |
| Reverse Transfer Capacitance<br>( $V_{DS} = 28\text{ V}$ , $V_{GS} = 0$ , $f = 1.0\text{ MHz}$ ) | $C_{rss}$ | — | 8  | — | pF |

**FUNCTIONAL CHARACTERISTICS**

|                                                                                                                                                                  |          |                                |      |   |    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------------------|------|---|----|
| Common Source Power Gain<br>( $V_{DD} = 28\text{ V}$ , $P_{out} = 45\text{ W}$ , $f = 150\text{ MHz}$ , $I_{DQ} = 25\text{ mA}$ )                                | $G_{ps}$ | 17                             | 19.5 | — | dB |
| Drain Efficiency<br>( $V_{DD} = 28\text{ V}$ , $P_{out} = 45\text{ W}$ , $f = 150\text{ MHz}$ , $I_{DQ} = 25\text{ mA}$ )                                        | $\eta$   | 60                             | 70   | — | %  |
| Electrical Ruggedness<br>( $V_{DD} = 28\text{ V}$ , $P_{out} = 45\text{ W}$ , $f = 150\text{ MHz}$ , $I_{DQ} = 25\text{ mA}$ ,<br>VSWR 30:1 at All Phase Angles) |          | No Degradation in Output Power |      |   |    |

**TYPICAL FUNCTIONAL TESTS (SSB)**


|                                                                                                                                               |          |   |     |   |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------|----------|---|-----|---|----|
| Common Source Power Gain<br>( $V_{DD} = 28\text{ V}$ , $P_{out} = 30\text{ W (PEP)}$ , $I_{DQ} = 100\text{ mA}$ ,<br>$f = 30$ ; 30.001 MHz)   | $G_{ps}$ | — | 20  | — | dB |
| Drain Efficiency<br>( $V_{DD} = 28\text{ V}$ , $P_{out} = 30\text{ W (PEP)}$ , $I_{DQ} = 100\text{ mA}$ ,<br>$f = 30$ ; 30.001 MHz)           | $\eta$   | — | 50  | — | %  |
| Intermodulation Distortion<br>( $V_{DD} = 28\text{ V}$ , $P_{out} = 30\text{ W (PEP)}$ , $I_{DQ} = 100\text{ mA}$ ,<br>$f = 30$ ; 30.001 MHz) | IMD(d3)  | — | -32 | — | dB |

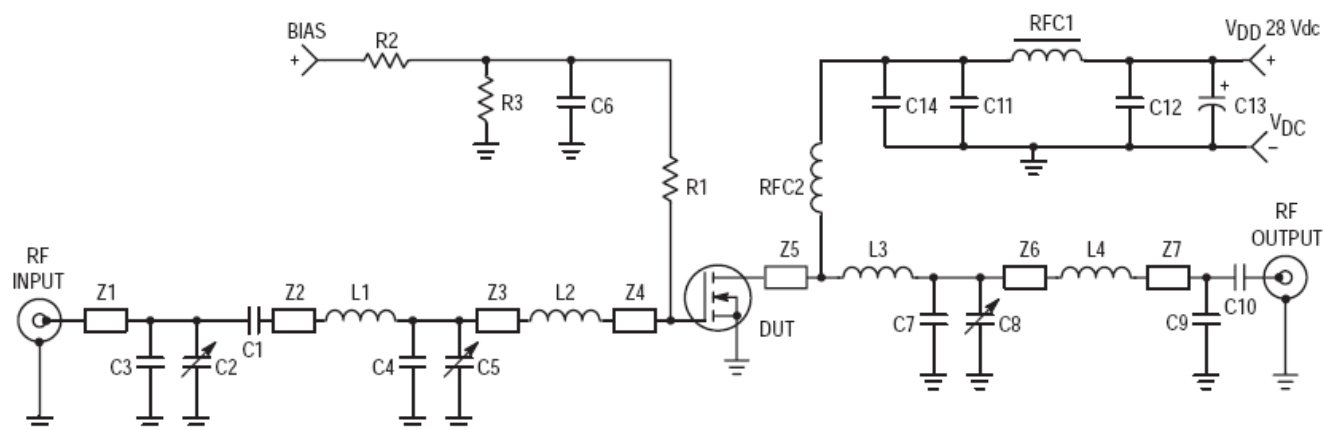

|            |                                          |
|------------|------------------------------------------|
| C1, C10    | 1000 pF, Chip Capacitor                  |
| C2, C5, C8 | 2–20 pF, Trimmer Capacitors, Johanson    |
| C3         | 43 pF, 100 mil Chip Capacitor, ATC       |
| C4         | 120 pF, 100 mil Chip Capacitor, ATC      |
| C6, C14    | 0.1 $\mu$ F, Capacitors                  |
| C7         | 50 pF, 100 mil Chip Capacitor, ATC       |
| C9         | 12 pF, 100 mil Chip Capacitor, ATC       |
| C11, C12   | 680 pF, Feedthru Capacitors              |
| C13        | 50 $\mu$ F, 50 V, Electrolytic Capacitor |
| L1         | 2 Turns, 0.297" ID, 18 AWG               |
| L2         | 1–1/2 Turns, 0.265" ID, 18 AWG           |
| L3         | 1–1/4 Turns, 0.234" ID, 18 AWG           |
| L4         | 1–1/2 Turns, 0.250" ID, 18 AWG           |
| R1         | 68 $\Omega$ , 1/2 W Chip Resistor        |

|       |                                                                  |
|-------|------------------------------------------------------------------|
| R2    | 1 k $\Omega$ , 1/2 W Chip Resistor                               |
| R3    | 10 k $\Omega$ , 1/2 W Chip Resistor                              |
| Z1    | 0.160" x 0.400" Microstrip                                       |
| Z2    | 0.160" x 0.600" Microstrip                                       |
| Z3    | 0.160" x 0.600" Microstrip                                       |
| Z4    | 0.160" x 0.900" Microstrip                                       |
| Z5    | 0.160" x 0.800" Microstrip                                       |
| Z6    | 0.160" x 0.800" Microstrip                                       |
| Z7    | 0.160" x 0.400" Microstrip                                       |
| RFC1  | Ferroxcube VK200–19/4B                                           |
| RFC2  | 10 Turns, 0.250" ID, 20 AWG, Enamel                              |
| Board | 0.062", G10 1 oz. Copper Clad<br>Both Sides, $\epsilon_r = 2.56$ |

Figure 1. MRF171A 150 MHz Test Circuit

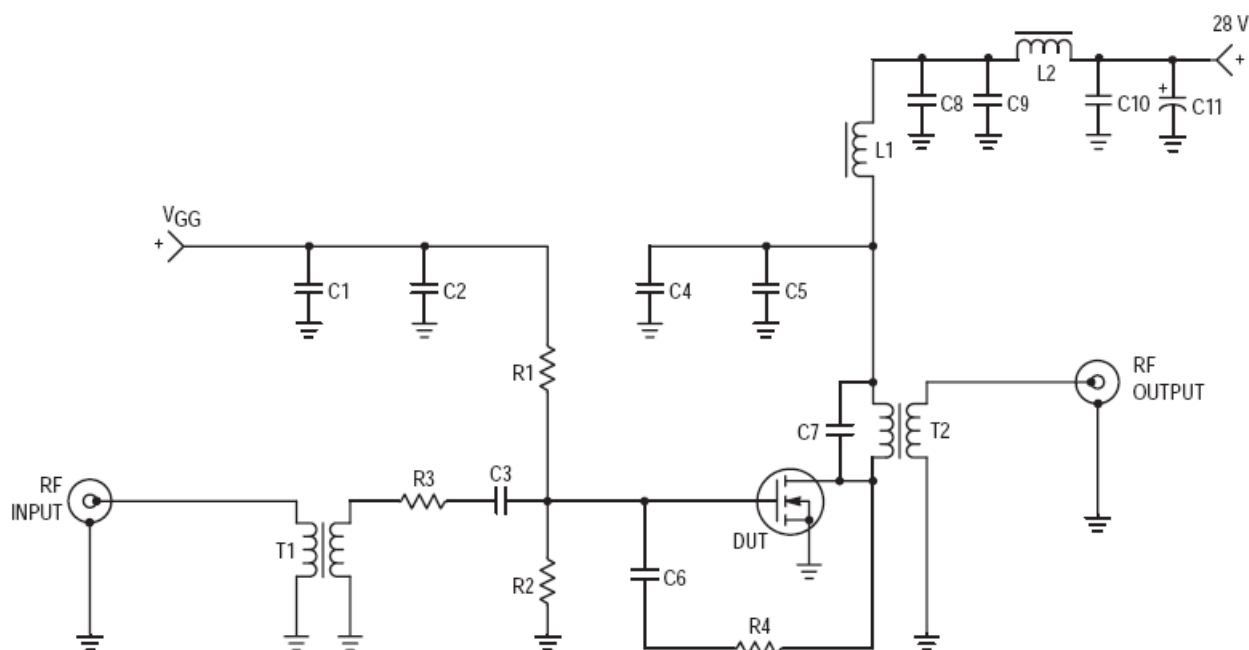

|                |                                           |        |                                     |
|----------------|-------------------------------------------|--------|-------------------------------------|
| C1, C3, C5, C6 | 0.1 $\mu$ F, Chip Capacitors              | L1, L2 | VK200 20/4B Ferrite Choke           |
| C2, C4         | 1000 pF, Chip Capacitors                  | R1, R2 | 200 $\Omega$ , 1/2 W Carbon         |
| C7             | 68 pF, Dipped Mica                        | R3     | 3 $\Omega$ , 1/2 W Carbon           |
| C8             | 0.1 $\mu$ F, Ceramic Cap or Equivalent    | R4     | 270 $\Omega$ , 2 W Carbon           |
| C9, C10        | 680 pF, Feedthru Capacitors               | T1     | 4:1 Impedance Broadband Transformer |
| C11            | 250 $\mu$ F, 50 V, Electrolytic Capacitor | T2     | 1:4 Impedance Broadband Transformer |

Figure 2. MRF171A 30 MHz Test Circuit

## TYPICAL CHARACTERISTICS

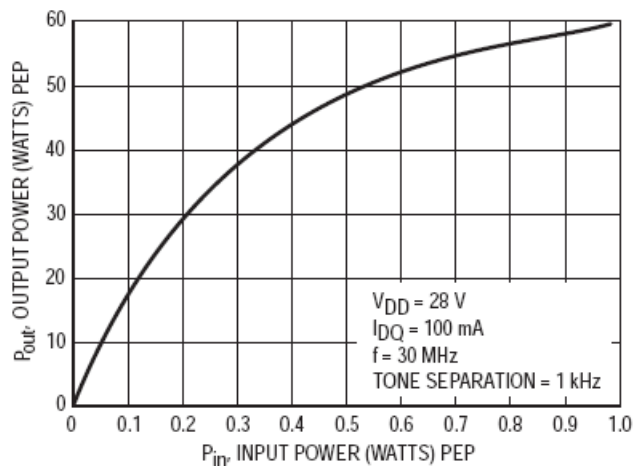


Figure 3. Output Power versus Input Power

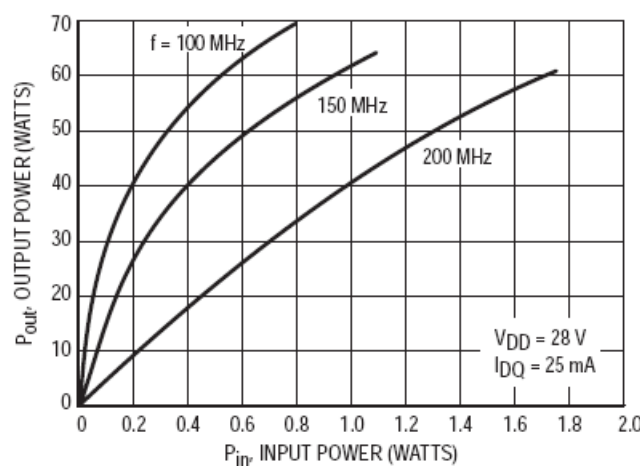


Figure 4. Output Power versus Input Power

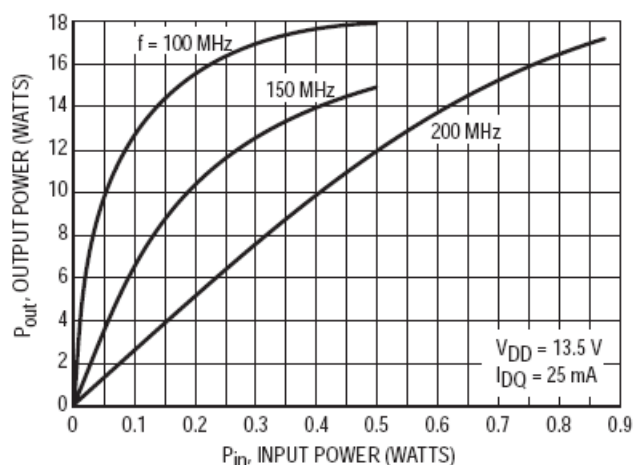


Figure 5. Output Power versus Input Power

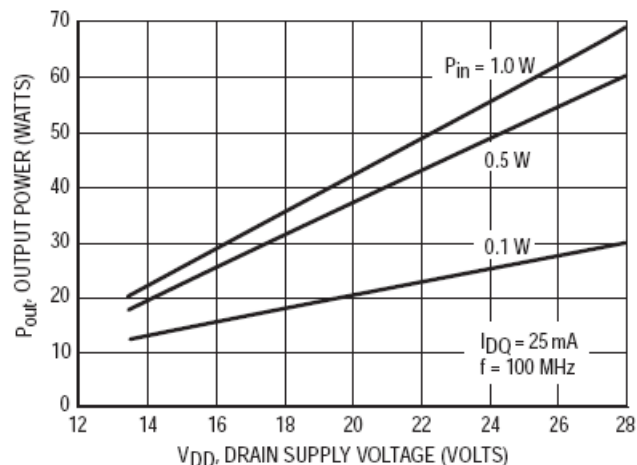


Figure 6. Output Power versus Supply Voltage

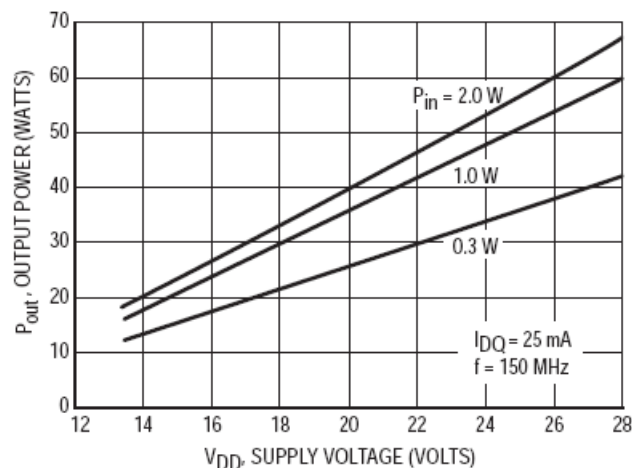


Figure 7. Output Power versus Supply Voltage

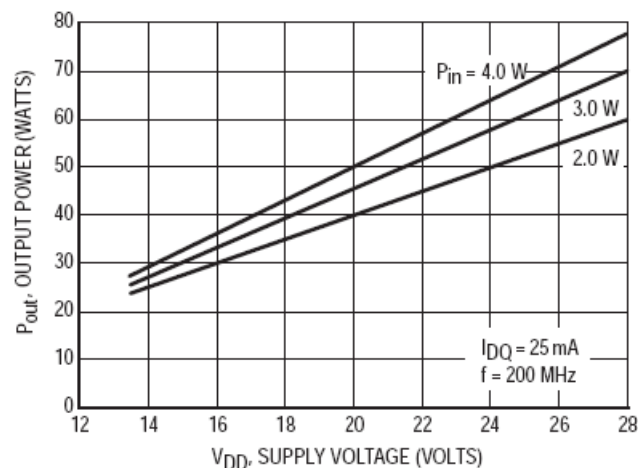


Figure 8. Output Power versus Supply Voltage

## TYPICAL CHARACTERISTICS

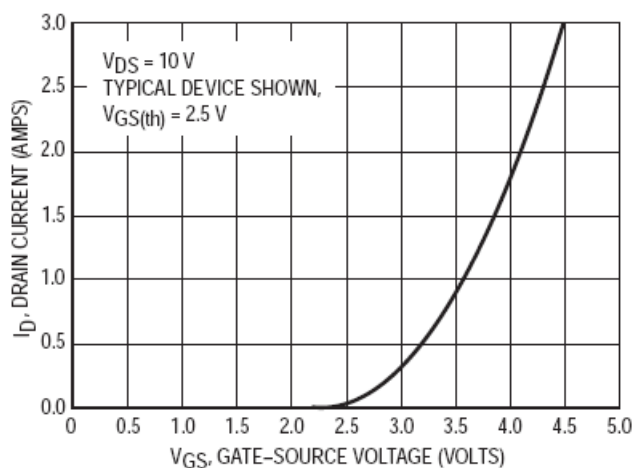


Figure 9. Drain Current versus Gate Voltage  
(Transfer Characteristics)

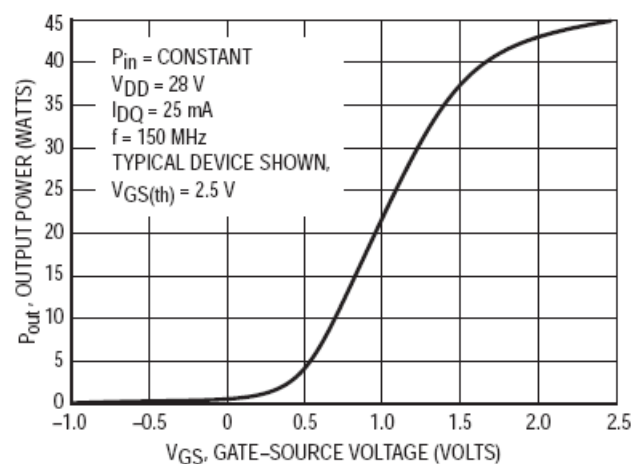


Figure 10. Output Power versus Gate Voltage


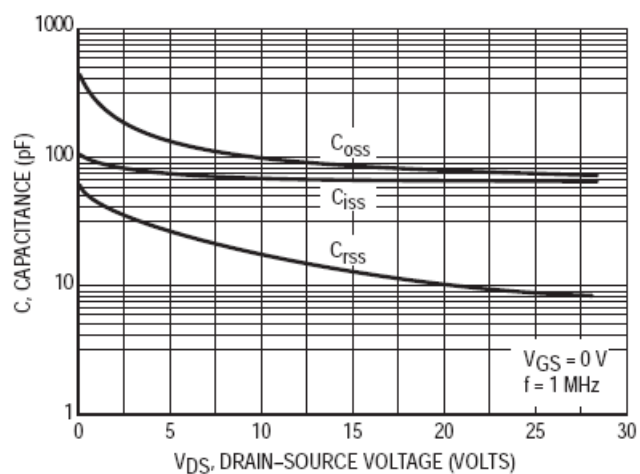


Figure 11. Capacitance versus Drain-Source Voltage

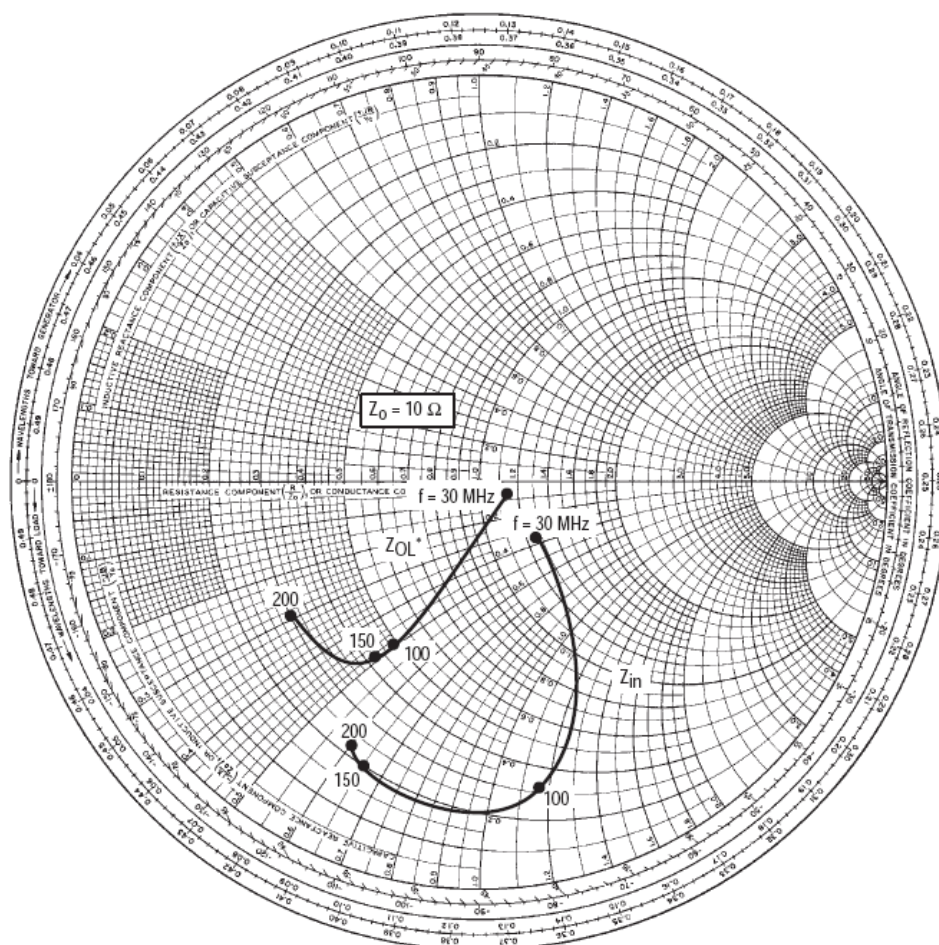

$V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 25\text{ mA}$ ,  $P_{out} = 45\text{ W}$

| f<br>MHz | $Z_{in}(1)$<br>$\Omega$ | $Z_{OL}(2)$<br>$\Omega$ |
|----------|-------------------------|-------------------------|
| 30       | $12.8 - j3.6$           | $11.5 - j0.99$          |
| 100      | $3.1 - j11.6$           | $4.9 - j4.9$            |
| 150      | $2.0 - j6.5$            | $4.2 - j4.9$            |
| 200      | $2.2 - j6.0$            | $3.0 - j2.9$            |

(1) 68  $\Omega$  shunt resistor gate-to-ground.

(2)  $Z_{OL}$  = Conjugate of the optimum load impedance into which the device operates at a given output power, voltage and frequency.

Figure 12. Large-Signal Series Equivalent Input/Output Impedance

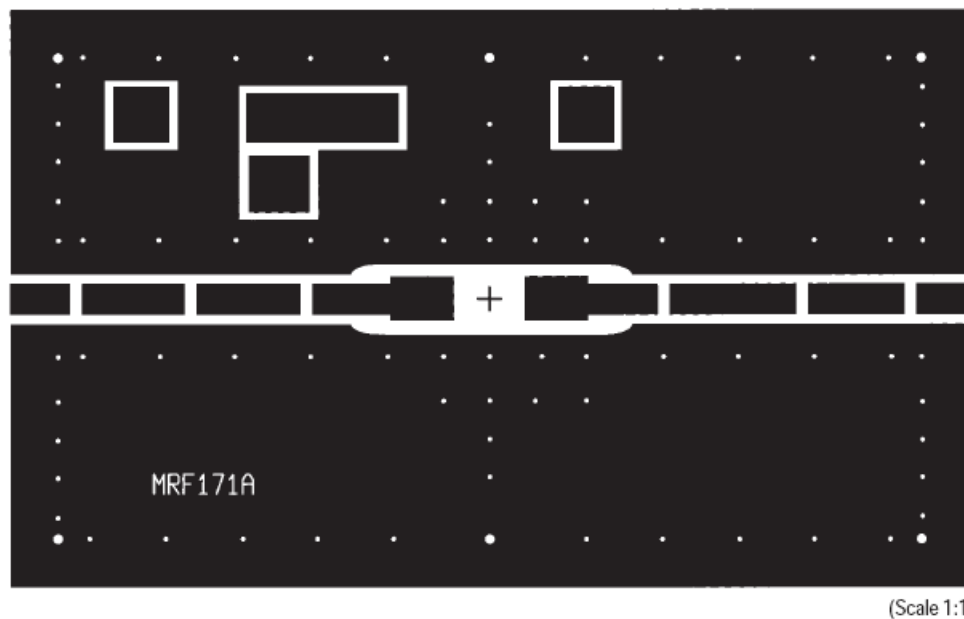


Figure 13. MRF171A Circuit Board Photo Master

Table 1. Common Source S-Parameters ( $V_{DS} = 12.5\text{ V}$ ,  $I_D = 0.5\text{ A}$ )

| f<br>MHz | S <sub>11</sub> |      | S <sub>21</sub> |    | S <sub>12</sub> |    | S <sub>22</sub> |      |
|----------|-----------------|------|-----------------|----|-----------------|----|-----------------|------|
|          | S <sub>11</sub> | ∠    | S <sub>21</sub> | ∠  | S <sub>12</sub> | ∠  | S <sub>22</sub> | ∠    |
| 30       | 0.801           | -162 | 11.90           | 96 | 0.026           | 13 | 0.811           | -166 |
| 40       | 0.809           | -166 | 9.12            | 91 | 0.028           | 11 | 0.812           | -171 |
| 50       | 0.810           | -169 | 7.29            | 88 | 0.027           | 11 | 0.831           | -172 |
| 60       | 0.808           | -170 | 6.22            | 85 | 0.028           | 9  | 0.824           | -174 |
| 70       | 0.814           | -172 | 5.30            | 82 | 0.028           | 9  | 0.831           | -176 |
| 80       | 0.811           | -173 | 4.56            | 81 | 0.027           | 10 | 0.837           | -175 |
| 90       | 0.811           | -174 | 4.04            | 80 | 0.027           | 13 | 0.829           | -174 |
| 100      | 0.814           | -174 | 3.66            | 77 | 0.027           | 12 | 0.846           | -176 |
| 110      | 0.812           | -175 | 3.37            | 75 | 0.027           | 11 | 0.842           | -177 |
| 120      | 0.816           | -175 | 3.00            | 74 | 0.027           | 13 | 0.850           | -176 |
| 130      | 0.816           | -176 | 2.75            | 73 | 0.027           | 14 | 0.849           | -175 |
| 140      | 0.817           | -176 | 2.57            | 72 | 0.027           | 17 | 0.851           | -176 |
| 150      | 0.821           | -176 | 2.37            | 69 | 0.027           | 17 | 0.863           | -177 |
| 160      | 0.820           | -176 | 2.27            | 67 | 0.027           | 17 | 0.853           | -177 |
| 170      | 0.821           | -177 | 2.08            | 66 | 0.026           | 19 | 0.838           | -177 |
| 180      | 0.824           | -177 | 1.93            | 65 | 0.027           | 19 | 0.861           | -177 |
| 190      | 0.825           | -177 | 1.89            | 64 | 0.027           | 21 | 0.873           | -177 |
| 200      | 0.830           | -177 | 1.74            | 62 | 0.027           | 23 | 0.873           | -178 |
| 210      | 0.831           | -177 | 1.67            | 60 | 0.027           | 25 | 0.874           | -177 |
| 220      | 0.831           | -178 | 1.62            | 59 | 0.026           | 28 | 0.870           | -178 |
| 230      | 0.836           | -178 | 1.48            | 57 | 0.027           | 27 | 0.909           | -179 |
| 240      | 0.836           | -178 | 1.43            | 56 | 0.027           | 26 | 0.865           | -180 |
| 250      | 0.839           | -178 | 1.37            | 57 | 0.028           | 30 | 0.873           | -178 |
| 260      | 0.844           | -178 | 1.30            | 54 | 0.028           | 34 | 0.882           | -179 |
| 270      | 0.842           | -178 | 1.28            | 52 | 0.028           | 36 | 0.887           | -180 |
| 280      | 0.845           | -179 | 1.21            | 52 | 0.027           | 37 | 0.881           | -180 |
| 290      | 0.849           | -179 | 1.14            | 50 | 0.027           | 36 | 0.869           | 179  |
| 300      | 0.849           | -179 | 1.12            | 50 | 0.029           | 39 | 0.852           | -180 |
| 310      | 0.855           | -179 | 1.06            | 49 | 0.029           | 42 | 0.891           | -179 |
| 320      | 0.856           | -179 | 1.03            | 46 | 0.030           | 43 | 0.889           | 180  |
| 330      | 0.856           | -180 | 0.96            | 45 | 0.031           | 47 | 0.868           | 180  |
| 340      | 0.858           | -180 | 0.96            | 46 | 0.030           | 47 | 0.888           | 179  |
| 350      | 0.860           | 180  | 0.93            | 44 | 0.031           | 49 | 0.875           | -180 |
| 360      | 0.862           | 180  | 0.91            | 44 | 0.033           | 48 | 0.901           | 179  |
| 370      | 0.866           | 180  | 0.86            | 43 | 0.034           | 50 | 0.913           | 178  |
| 380      | 0.867           | 179  | 0.84            | 41 | 0.036           | 52 | 0.897           | 178  |
| 390      | 0.869           | 179  | 0.82            | 42 | 0.035           | 54 | 0.893           | 178  |
| 400      | 0.870           | 179  | 0.78            | 40 | 0.035           | 57 | 0.880           | 180  |
| 410      | 0.872           | 179  | 0.77            | 39 | 0.037           | 55 | 0.923           | 178  |
| 420      | 0.876           | 178  | 0.73            | 37 | 0.039           | 54 | 0.915           | 176  |
| 430      | 0.877           | 178  | 0.69            | 38 | 0.040           | 56 | 0.903           | 177  |
| 440      | 0.879           | 178  | 0.68            | 39 | 0.041           | 58 | 0.921           | 178  |

Table 1. Common Source S-Parameters ( $V_{DS} = 12.5$  V,  $I_D = 0.5$  A) (continued)

| f<br>MHz | S <sub>11</sub> |     | S <sub>21</sub> |    | S <sub>12</sub> |    | S <sub>22</sub> |     |
|----------|-----------------|-----|-----------------|----|-----------------|----|-----------------|-----|
|          | S <sub>11</sub> | φ   | S <sub>21</sub> | φ  | S <sub>12</sub> | φ  | S <sub>22</sub> | φ   |
| 450      | 0.882           | 177 | 0.68            | 36 | 0.040           | 61 | 0.926           | 178 |
| 460      | 0.884           | 177 | 0.65            | 36 | 0.041           | 59 | 0.937           | 175 |
| 470      | 0.886           | 177 | 0.62            | 35 | 0.041           | 60 | 0.896           | 176 |
| 480      | 0.885           | 176 | 0.62            | 33 | 0.044           | 61 | 0.907           | 176 |
| 490      | 0.886           | 176 | 0.61            | 32 | 0.046           | 63 | 0.907           | 176 |
| 500      | 0.887           | 176 | 0.59            | 31 | 0.047           | 65 | 0.916           | 175 |

The RF MOSFET Line  
45W, 150MHz, 28V

Rev. V1


Table 2. Common Source S-Parameters ( $V_{DS} = 28\text{ V}$ ,  $I_D = 0.5\text{ A}$ )

| f<br>MHz | S <sub>11</sub> | φ    | S <sub>21</sub> | φ   | S <sub>12</sub> | φ  | S <sub>22</sub> | φ    |
|----------|-----------------|------|-----------------|-----|-----------------|----|-----------------|------|
| 30       | 0.783           | -152 | 17.10           | 100 | 0.025           | 17 | 0.730           | -158 |
| 40       | 0.793           | -158 | 13.20           | 94  | 0.027           | 13 | 0.730           | -164 |
| 50       | 0.793           | -162 | 10.50           | 90  | 0.027           | 12 | 0.754           | -167 |
| 60       | 0.791           | -165 | 9.00            | 87  | 0.027           | 11 | 0.746           | -169 |
| 70       | 0.798           | -167 | 7.68            | 83  | 0.026           | 10 | 0.760           | -171 |
| 80       | 0.795           | -169 | 6.63            | 82  | 0.026           | 10 | 0.770           | -170 |
| 90       | 0.795           | -170 | 5.85            | 80  | 0.026           | 12 | 0.760           | -170 |
| 100      | 0.799           | -170 | 5.30            | 77  | 0.026           | 10 | 0.779           | -172 |
| 110      | 0.798           | -171 | 4.86            | 75  | 0.026           | 11 | 0.775           | -174 |
| 120      | 0.802           | -172 | 4.35            | 74  | 0.025           | 13 | 0.785           | -172 |
| 130      | 0.801           | -172 | 3.97            | 72  | 0.025           | 14 | 0.788           | -171 |
| 140      | 0.803           | -173 | 3.70            | 71  | 0.025           | 15 | 0.791           | -172 |
| 150      | 0.809           | -173 | 3.42            | 68  | 0.025           | 14 | 0.808           | -173 |
| 160      | 0.808           | -173 | 3.27            | 66  | 0.025           | 15 | 0.796           | -172 |
| 170      | 0.809           | -174 | 2.99            | 65  | 0.024           | 18 | 0.783           | -174 |
| 180      | 0.814           | -174 | 2.77            | 63  | 0.025           | 19 | 0.809           | -173 |
| 190      | 0.815           | -175 | 2.71            | 62  | 0.024           | 21 | 0.820           | -174 |
| 200      | 0.822           | -175 | 2.49            | 60  | 0.024           | 22 | 0.826           | -175 |
| 210      | 0.824           | -175 | 2.37            | 57  | 0.024           | 24 | 0.836           | -175 |
| 220      | 0.825           | -175 | 2.23            | 57  | 0.024           | 26 | 0.807           | -175 |
| 230      | 0.831           | -176 | 2.08            | 56  | 0.024           | 29 | 0.839           | -175 |
| 240      | 0.830           | -176 | 2.00            | 54  | 0.024           | 29 | 0.818           | -176 |
| 250      | 0.832           | -176 | 1.92            | 55  | 0.024           | 33 | 0.828           | -174 |
| 260      | 0.838           | -176 | 1.81            | 53  | 0.024           | 35 | 0.829           | -175 |
| 270      | 0.837           | -176 | 1.79            | 50  | 0.025           | 37 | 0.834           | -175 |
| 280      | 0.840           | -177 | 1.69            | 50  | 0.025           | 39 | 0.832           | -176 |
| 290      | 0.844           | -177 | 1.60            | 48  | 0.025           | 39 | 0.836           | -177 |
| 300      | 0.844           | -177 | 1.55            | 48  | 0.025           | 44 | 0.814           | -175 |
| 310      | 0.849           | -178 | 1.48            | 47  | 0.026           | 46 | 0.848           | -175 |
| 320      | 0.852           | -178 | 1.43            | 44  | 0.027           | 45 | 0.855           | -177 |
| 330      | 0.852           | -178 | 1.35            | 43  | 0.028           | 48 | 0.833           | -177 |
| 340      | 0.855           | -178 | 1.32            | 44  | 0.028           | 49 | 0.861           | -177 |
| 350      | 0.856           | -178 | 1.29            | 41  | 0.029           | 53 | 0.842           | -176 |

Table 2. Common Source S-Parameters ( $V_{DS} = 28\text{ V}$ ,  $I_D = 0.5\text{ A}$ ) (continued)

| f<br>MHz | S <sub>11</sub> | ∠    | S <sub>21</sub> | ∠  | S <sub>12</sub> | ∠  | S <sub>22</sub> | ∠    |
|----------|-----------------|------|-----------------|----|-----------------|----|-----------------|------|
| 360      | 0.859           | -179 | 1.25            | 42 | 0.030           | 54 | 0.872           | -178 |
| 370      | 0.863           | -179 | 1.18            | 39 | 0.030           | 55 | 0.886           | -178 |
| 380      | 0.864           | -179 | 1.15            | 38 | 0.031           | 55 | 0.864           | -178 |
| 390      | 0.867           | -179 | 1.12            | 39 | 0.032           | 57 | 0.862           | -179 |
| 400      | 0.869           | -180 | 1.07            | 37 | 0.032           | 60 | 0.853           | -177 |
| 410      | 0.872           | -180 | 1.05            | 35 | 0.035           | 60 | 0.898           | -179 |
| 420      | 0.876           | 180  | 1.00            | 34 | 0.036           | 60 | 0.889           | 180  |
| 430      | 0.877           | 179  | 0.95            | 35 | 0.037           | 62 | 0.884           | -179 |
| 440      | 0.879           | 179  | 0.93            | 34 | 0.038           | 64 | 0.902           | -179 |
| 450      | 0.882           | 179  | 0.91            | 32 | 0.039           | 65 | 0.901           | -180 |
| 460      | 0.884           | 178  | 0.88            | 32 | 0.041           | 64 | 0.922           | 179  |
| 470      | 0.885           | 178  | 0.84            | 32 | 0.040           | 66 | 0.877           | 179  |
| 480      | 0.885           | 178  | 0.83            | 30 | 0.042           | 66 | 0.892           | 179  |
| 490      | 0.886           | 177  | 0.81            | 29 | 0.044           | 68 | 0.891           | 179  |
| 500      | 0.887           | 177  | 0.80            | 28 | 0.045           | 68 | 0.900           | 178  |

## PACKAGE DIMENSIONS

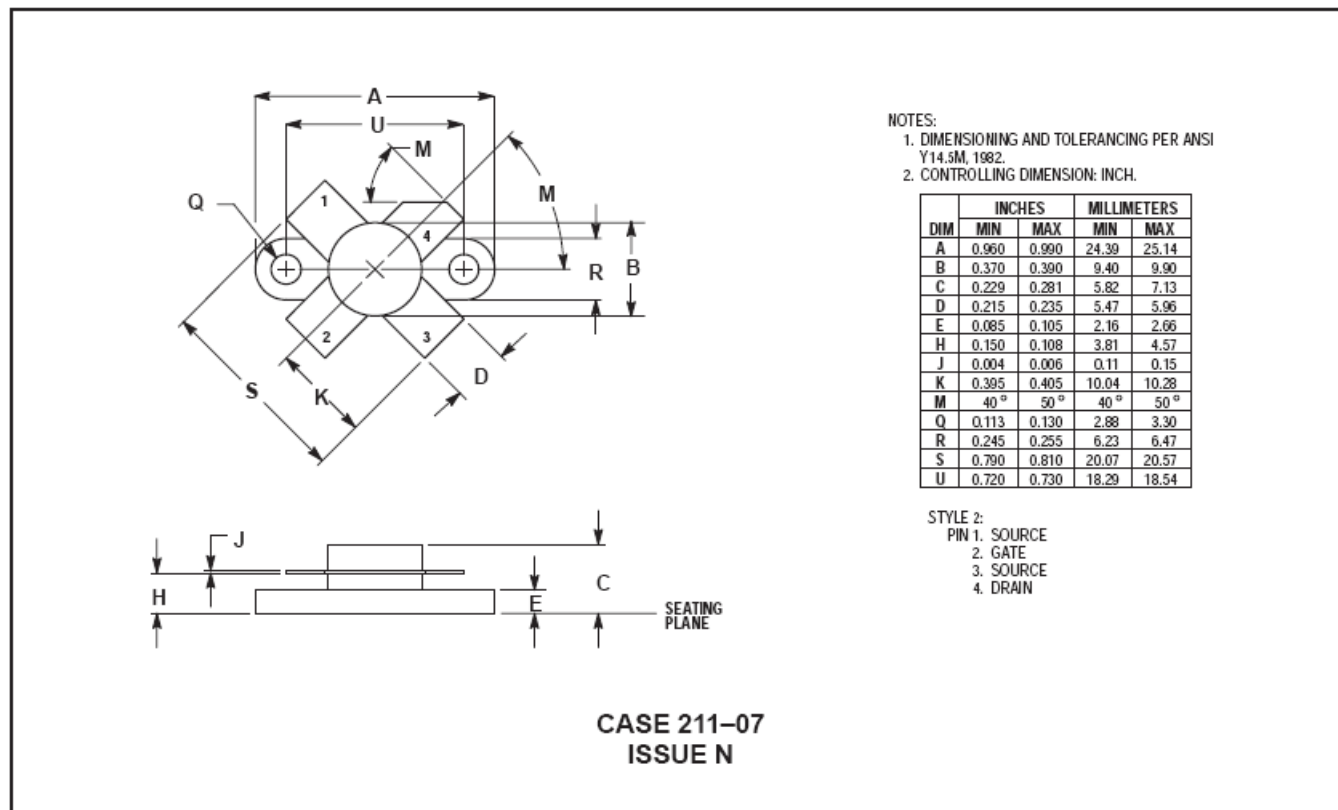

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.