

Surface Mount Type

POSCAP

Series : **TA**

- ◆ This product is not intended for use in any driving application or any other critical functions that affect passenger safety.
(e.g. Powertrain, ABS, Engine ECU, Airbag, etc.)
If the intended use of TA/TV series products is for use in other automotive related applications, please contact our sales team.
All requests are subject to approval.


Features

- Guaranteed at 85 °C 85 %RH ● RoHS compliance, Halogen free


Specifications

Size code	B2	D2E	D3L
Category temperature range	-55 °C to +105 °C		
Rated voltage range	4 V.DC to 10 V.DC	2.5 V.DC to 10 V.DC	
Category voltage range	4 V.DC to 10 V.DC	2.5 V.DC to 10 V.DC	
Rated capacitance range	47μF to 100 μF	68 μF to 470 μF	150 μF to 680 μF
Capacitance tolerance	±20 % (120 Hz / + 20 °C)		
Leakage current	Please see the attached characteristics list		
Dissipation factor (tan δ)	Please see the attached characteristics list		
Surge voltage (V.DC)	Rated voltage × 1.15		
Endurance	+105 °C, 2000 h, (B2 size : 1000 h) rated voltage applied		
	Capacitance change	Within ±20 % of the initial value	
	tan δ	≤ 1.5 times of the initial limit	
	DC leakage current	Within the initial limit	
Damp heat (Steady State)	+85 °C, 85 % to 90 %, 500 h, rated voltage applied		
	Capacitance change	Within +50 %, -20 % of the initial value (2R5TAE470M(F), 2R5TAE330M(F, I), 2R5TAE220M(F, 9))	
	tan δ	Within +40 %, -20 % of the initial value (Except for above model)	
	tan δ	≤ 1.5 times of the initial limit	
	DC leakage current	Within the initial limit	

Marking

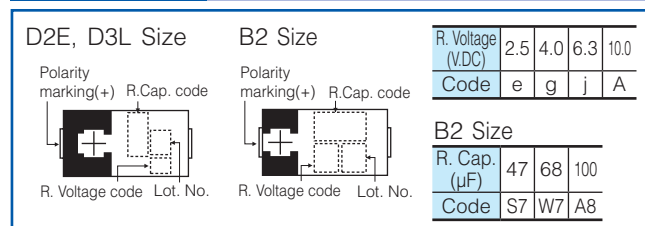

Dimensions (not to scale)

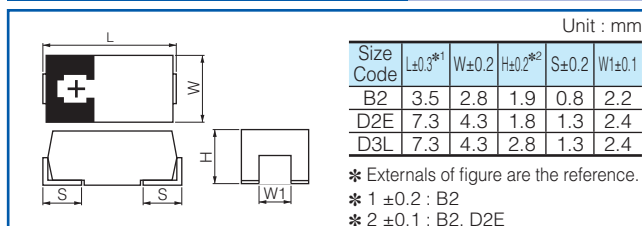

Characteristics list

Series	Rated voltage (V.DC)	Rated temp. (°C)	Category voltage (V.DC)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life		
						L	W	H		Ripple * ¹ (mAr.m.s.)	ESR * ² (mΩ max.)	tan δ * ³	LC * ⁴ (μA)	Part number	Min. Packaging Qty (pcs)	Reflow Temp ≤ 260°C	Reflow Temp ≤ 250°C	
TA	2.5	105	2.5	105	220	7.3	4.3	1.8	D2E	3900	9	0.10	110.0	2R5TAE220M9	3000	3	3	
		105	2.5	105		7.3	4.3	1.8		3100	15	0.10	55.0	2R5TAE220MF	3000			
		105	2.5	105		7.3	4.3	1.8		2400	25	0.10	55.0	2R5TAE220M	3000			
		105	2.5	105	330	7.3	4.3	1.8		3100	15	0.10	82.5	2R5TAE330MF	3000			
		105	2.5	105		7.3	4.3	1.8		2800	18	0.10	82.5	2R5TAE330MI	3000			
		105	2.5	105		7.3	4.3	1.8		2400	25	0.10	82.5	2R5TAE330M	3000			
		105	2.5	105	470	7.3	4.3	1.8		3100	15	0.10	117.5	2R5TAE470MF	3000			
		105	2.5	105		7.3	4.3	1.8		2400	25	0.10	117.5	2R5TAE470M	3000			
		105	2.5	105		7.3	4.3	2.8		3100	15	0.10	170.0	2R5TAE680MFL	2500			
	105	2.5	105	680	7.3	4.3	2.8	D3L	2400	25	0.10	170.0	2R5TAE680ML	2500				
	105	4.0	105		100	3.8	2.8		1.9	B2	1100	70	0.08	40.0	4TAB100M			2000
	105	4.0	105		220	7.3	4.3		1.8		D2E	2800	18	0.10	88.0			4TAE220MI
	105	4.0	105	470	7.3	4.3	2.8	D3L	2800	18		0.10	188.0	4TAE470MIL	2500			
	105	4.0	105		7.3	4.3	2.8		2400	25	0.10	188.0	4TAE470ML	2500				
	6.3	105	6.3	105	47	3.5	2.8	1.9	B2	1100	70	0.08	29.6	6TAB47M	2000			
		105	6.3	105	68	3.5	2.8	1.9		D2E	1100	70	0.08	42.8	6TAB68M			2000
		105	6.3	105	150	7.3	4.3	1.8			2400	25	0.10	94.5	6TAE150M			3000
		105	6.3	105	220	7.3	4.3	1.8	2800		18	0.10	138.6	6TAE220MI	3000			
		105	6.3	105		7.3	4.3	1.8	2400	25	0.10	138.6	6TAE220M	3000				
		105	6.3	105		330	7.3	4.3	2.8	D3L	2400	25	0.10	207.9	6TAE330ML			2500
	10	105	10.0	105	47	3.5	2.8	1.9	B2	1100	70	0.08	47.0	10TAB47M	2000			
		105	10.0	105	68	7.3	4.3	1.8	D2E	2400	25	0.10	68.0	10TAE68M	3000			
		105	10.0	105	150	7.3	4.3	2.8	D3L	2400	25	0.10	150.0	10TAE150ML	2500			
		105	10.0	105	220	7.3	4.3	2.8		2400	25	0.10	220.0	10TAE220ML	2500			

*1 Ripple current (100 kHz/ +45 °C). *2 ESR (100 kHz/+20 °C) *3 $\tan \delta$ (120 Hz/+20 °C) *4 After 5 minutes

◆ Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.