




# Discontinued

**HO4002-1**

**400.0 MHz  
SAW  
Oscillator**

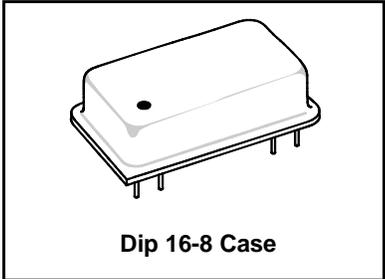

- SAW Frequency Stabilization
- Fundamental-Mode Oscillation at 400.0 MHz
- A Rugged, Compact General-Purpose Oscillator
- Complies with Directive 2002/95/EC (RoHS)

The frequency of this oscillator is stabilized by surface-acoustic-wave (SAW) technology. This results in excellent performance from a compact, rugged, oscillator operating at the fundamental frequency of 400.0 MHz. The high-reliability of the HO4002-1 makes it suitable for general purpose use in a wide variety of applications.

### Absolute Maximum Ratings

Rating		Value	Units
DC Supply Voltage		0 to +13	VDC
Case Temperature	Powered	-40 to +70	°C
Case Temperature	Storage	-40 to +85	

### Electrical Characteristics

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Operating Frequency	Absolute Frequency	$f_o$	1, 7		400.00		MHz
	Tune Range			399.960		400.040	MHz
	Tune Voltage			0		+10	VDC
	Tuning Linearity				3:1	4:1	
RF Output Power		$P_O$	3, 6	+7	+10		dBm
Discrete Spurious	Second Harmonics		2, 3, 4			-15	dBc
	Third and Higher Harmonics					-20	
	Nonharmonic				-80		
SSB Phase Noise	1 kHz Offset				-100	-95	dBc/Hz
	10 kHz Offset				-130	-125	
	100 kHz Offset				-150		
RF Impedance	Nominal Impedance	$Z_O$	3		50		$\Omega$
	Operating Load VSWR	$G_L$	3, 5			2:1	
DC Power Supply	Operating Voltage	$V_{CC}$	3, 6	10.8	12	13.2	VDC
	Operating Current	$I_{CC}$				45	mA
Operating Case Temperature		$T_C$	3, 6	-20		+70	°C
Lid Symbolization (YY=Year, WW=Week)	RFM HO4002-1 YYWW						





**CAUTION: Electrostatic Sensitive Device.** Observe precautions for handling. COCOM CAUTION: Approval by the U.S. Department of Commerce is required prior to export of this device.

### Notes:

- One or more of the following United States patents apply: 4,616,197; 4,610,681; and 4,761,616.
- Unless noted otherwise, all specifications are listed at  $T_C = +25^\circ\text{C} \pm 2^\circ\text{C}$ ,  $V_{CC} =$  nominal voltage  $\pm 0.01$  VDC, and load impedance =  $50 \Omega$  with  $V_{SWR} \leq 1.5:1$ .
- The design, manufacturing process, and specification of this device are subject to change without notice.
- Applies to oscillator only and not to sidebands caused by external electrical or mechanical sources. (Dedicated external voltage regulation with low-frequency filtering for the DC power supply and proper circuit board layout are recommended for optimum spectral purity.)
- For specified maximum operating load VSWR (any angle) at  $F_O$ . (No instability or damage will occur for any passive load impedance.)
- For any combination of  $V_{CC}$  and  $T_C$  within the specified operating ranges.
- Applies for any combination of Note 5 and 6 conditions.

### BLOCK DIAGRAM

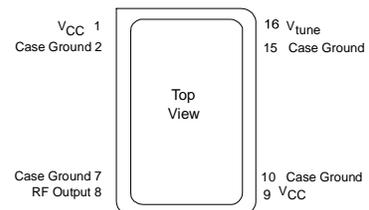


### ELECTRICAL CONNECTIONS

# Discontinued

## DIP16-8

Metal Dual-Inline Package with 8 leads in a 16-lead DIP configuration

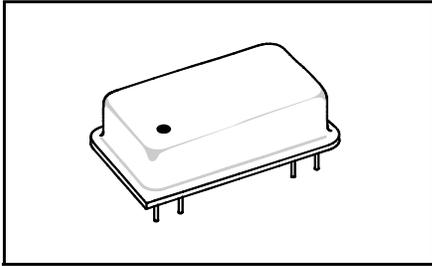

Dimensio n	mm		Inches	
	MIN	MAX	MIN	MAX
A	—	25.02	—	0.985
B	—	12.83	—	0.505
C	—	6.35	—	0.250
D	0.40	0.51	0.016	0.020
E	0.64 Nominal		0.025 Nominal	
F	7.62 Nominal		0.300 Nominal	
G	2.54 Nominal		0.100 Nominal	
H	17.78 Nominal		0.700 Nominal	
K	3.39	6.73	0.130	0.265
L	1.30	—	0.051	—
M	—	11.18	—	0.440
N	—	22.60	—	0.890
R	1.75	2.26	0.069	0.089

