

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




more than you expect




ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 tie(1+2, 3+4), @20°C	0.065 ohms max.
D.C. RESISTANCE	7-12 tie(7+8+9, 10+11+12), @20°C	0.015 ohms max.
D.C. RESISTANCE	5-6 @20°C	0.260 ohms max.
INDUCTANCE	1-4 tie(1+2, 3+4), 100kHz, 100mVAC, Ls	100.0uH ±12%
LEAKAGE INDUCTANCE	1-4 tie(1+2, 3+4, 5+6+7+8+9+10+11+12), 100kHz, 10mVAC, Ls	850nH max.
DIELECTRIC	1-12 tie(1+2, 5+6+3, 10+11+12), 1875VAC, 1 second	1500VAC, 1 minute
TURNS RATIO	(1-3):(7-10), tie(1+2, 3+4)	2:1, ±1%
TURNS RATIO	(1-3):(8-11), tie(1+2, 3+4)	2:1, ±1%
TURNS RATIO	(1-3):(9-12), tie(1+2, 3+4)	2:1, ±1%
TURNS RATIO	(1-3):(2-4)	1:1, ±1%
TURNS RATIO	(1-3):(5-6), tie(1+2, 3+4)	2:1, ±1%

TERM. NO.'s FOR REF. ONLY

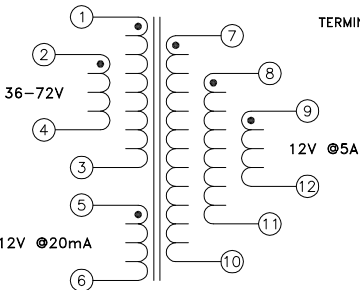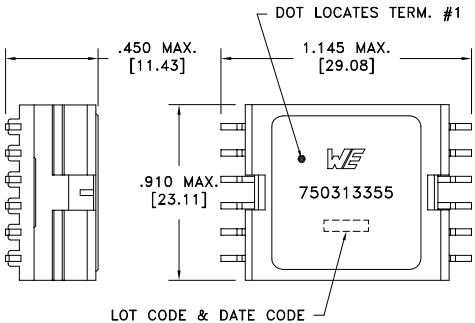

Application of the transformer allows for the leadwires between terminals 1&2, 3&4, 10&11&12 and 7&8&9 to solder bridge.

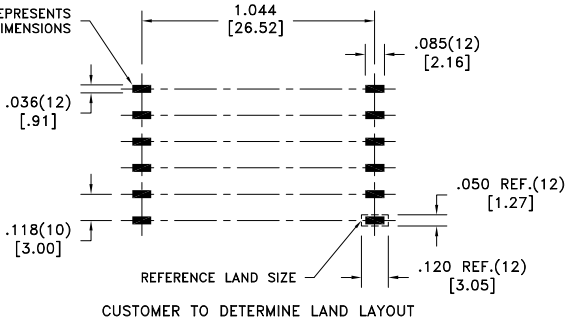

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0868 www.we-online.com/midcom		Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$	TRANSFORMER eiSos p/n: 750313355	750313355 SPECIFICATION SHEET 1 OF 1
6B	2/15			Decimals: $\pm .005$ [.13] Footprint: $\pm .005$ [.13]		
6A	2/14	SEE REVISION SHEET FOR	REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		

