
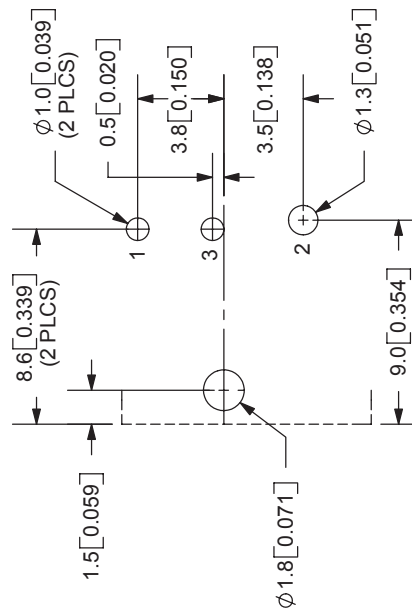
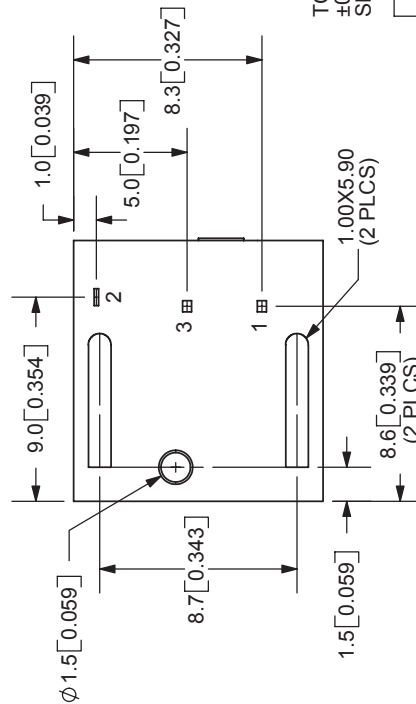
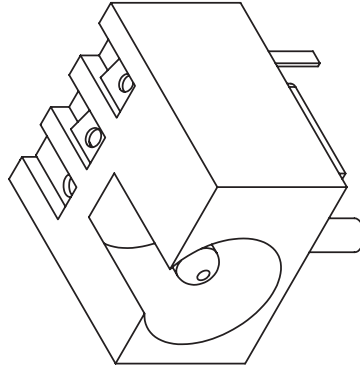
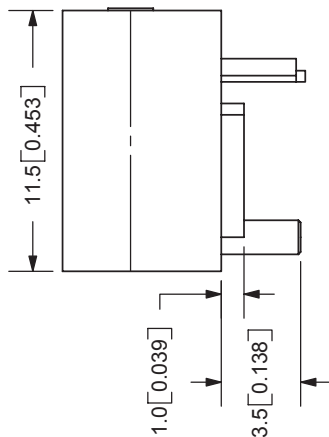


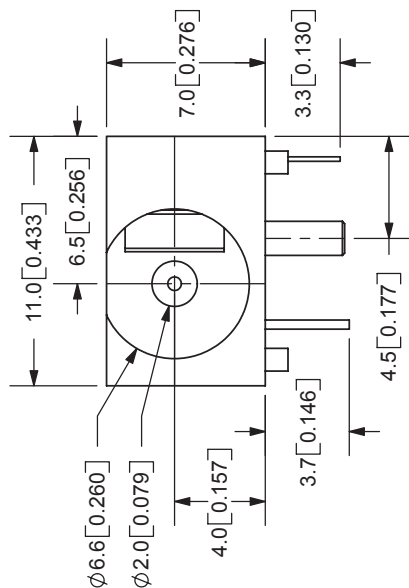

PCB LAYOUT
TOP VIEW

MODEL NO.	PJ-012A
SCHEMATIC	

CENTER PIN DIAMETER 2.0mm

PC FILE NAME:

COPYRIGHT 2006 BY CUI INC.

SPECIFICATIONS:
RATING: 16V DC @ 2A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP.: -20° ~ +85°C

	MATERIAL	PLATING
CENTER PIN	Copper	Nickel
TERMINAL 1	Brass	Silver
TERMINAL 2	Titanium Copper Alloy	Silver
TERMINAL 3	Brass	Silver
HOUSING	PBT	

TOLERANCE:
±0.3mm UNLESS OTHERWISE
SPECIFIED



CON

9615 SW Allen Blvd., Ste. 103
Beaverton, OR 97005
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

TITLE: DC POWER JACK		REV: A
PART NO. PJ-012A	UNITS:	MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:	
		SCALE: 3:1