

0022162050

0022162050 Information

	Part Number	0022162050	
in the series	Manufacturer	Molex Connector Corporation	CE 11-197 CE 1
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN RECEPT 5POS .100 R/A PCB	- Maxaa
	Package	-	一面紛紛分的
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



0022162050 Specifications

Manufacturer Part Number0022162050ManufacturerMolex Connector CorporationCategoryConnectors, InterconnectsPackage-Package-SeriesKK? 4455Connector TypeReceptacles, Female SocketsContact TypeNon-GenderedStyleBoard to Board or CableNumber of Positions5Number of Positions Loaded1Number of Rows1Number of Rows5Number of Rows1StyleBoard Edge, Through Hole, Right AngleNumber of RowsSolderStyleBoard Edge, Through Hole, Right AngleStyleSolder
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesKK? 4455Connector TypeReceptacleContact TypeNon-GenderedStyleBoard to Board or CableNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSoard Edge, Through Hole, Right AngleTerminationSolderFastening TypePush-Pull
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesKK? 4455Connector TypeReceptacleContact TypeNon-GenderedStyleBoard to Board or CableNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSoard Edge, Through Hole, Right AngleMounting TypeBoard Edge, Through Hole, Right AngleFastening TypePush-Pull
Package-SeriesKK? 4455Connector TypeReceptacleContact TypeNon-GenderedStyleBoard to Board or CableNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeBoard Edge, Through Hole, Right AngleFastening TypeWish-Pull
SeriesKK? 4455Connector TypeReceptacleContact TypeNon-GenderedStyleBoard to Board or CableNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeBoard Edge, Through Hole, Right AngleFastening TypePush-Pull
Connector TypeReceptacleContact TypeNon-GenderedStyleBoard to Board or CableNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSoard Edge, Through Hole, Right AngleMounting TypeBoard Edge, Through Hole, Right AngleFastening TypePush-Pull
Contact TypeNon-GenderedStyleBoard to Board or CableNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeBoard Edge, Through Hole, Right AngleTerminationSolderFastening TypePush-Pull
StyleBoard to Board or CableNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeBoard Edge, Through Hole, Right AngleTerminationSolderFastening TypePush-Pull
Number of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeBoard Edge, Through Hole, Right AngleTerminationSolderFastening TypePush-Pull
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeBoard Edge, Through Hole, Right AngleTerminationSolderFastening TypePush-Pull
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeBoard Edge, Through Hole, Right AngleTerminationSolderFastening TypePush-Pull
Number of Rows1Row Spacing - Mating-Mounting TypeBoard Edge, Through Hole, Right AngleTerminationSolderFastening TypePush-Pull
Row Spacing - Mating-Mounting TypeBoard Edge, Through Hole, Right AngleTerminationSolderFastening TypePush-Pull
Mounting TypeBoard Edge, Through Hole, Right AngleTerminationSolderFastening TypePush-Pull
Termination Solder Fastening Type Push-Pull
Fastening Type Push-Pull
Contact Finish - Mating Gold
Contact Finish Thickness - Mating 15µin (0.38µm)
Insulation Color White
Insulation Height 0.185" (4.70mm)
Contact Length - Post 0.132" (3.35mm)
Operating Temperature $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
Material Flammability Rating UL94 V-0

Features	Board Hooks
Ingress Protection	-
Mated Stacking Heights	-
Contact Finish - Post	Tin

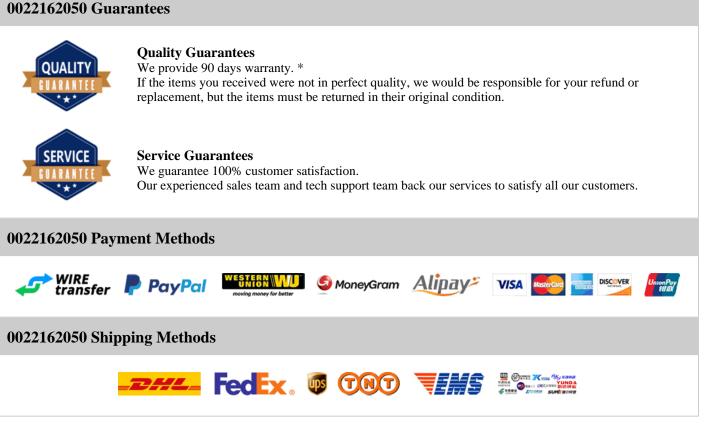

If you have any question about 0022162050, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com