

# 1412826

### 1412826 Information

www.telenet.om	Part Number Manufacturer Category Description Package	Connectors, Interconnects Heavy Duty Connectors - Housings, Hoods, Bases CONN BASE SIDE ENTRY SZB6 M25 - For the pricing/inventory/lead time, please contact	
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote
	For Reference Only	Manufacturer Category Description Package	Manufacturer Phoenix Contact   Manufacturer Phoenix Contact   Category Connectors, Interconnects   Heavy Duty Connectors - Housings, Hoods, Bases   Description CONN BASE SIDE ENTRY SZB6 M25   Package -   For Reference Only For the pricing/inventory/lead time, please contact   us Website: https://www.heisener.com

# **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 1412826 Specifications

Manufacturer Part Number1412826ManufacturerPioenix ContactCategoryConnectors, InterconnectsHeavy Duty Connectors - Housings, Hoods, BasesPackage-SeriesHEAVYCON? EVOConnector TypeBase - Box MountStyleSide EntryStyleSide EntryLock LocationBoxing Clip (1) on Base BottomThread SizeM25Size / Dimension3.00° L x 2.00° May ResistantStyleSider Freder Site (1) on Site S			
CategoryConnectors, Interconnects Heavy Duty Connectors - Housings, Hoods, BasesPackage-Package-SeriesHEAVYCON? EVOConnector TypeBase - Box MountStyleSide EntrySizeB6Lock LocationLocking Clip (1) on Base BottomThread SizeM25Size/ Dimension3.307" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)Housing Color-FeaturesCover, Feed Through, Salt Water ResistantHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Manufacturer Part Number	1412826	
Heavy Duty Connectors - Housings, Hoods, BasesPackage-SeriesHEAVYCON? EVOConnector TypeBase - Box MountStyleSide EntrySizeB6Lock LocationLocking Clip (1) on Base BottomThread Size3.307" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)Size / Dimension-Housing Color-FeaturesCover, Feed Through, Salt Water ResistantHousing MaterialHofo/fo9K - Dust Tight, Water Resistant, WaterproofHousing Finish-Operating Temperature40°C ~ 125°C	Manufacturer	Phoenix Contact	
Package-SeriesHEAVYCON? EVOConnector TypeBase - Box MountStyleSide EntrySizeB6Lock LocationLocking Clip (1) on Base BottomThread SizeM25Size / Dimension3.00" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)Housing Color-FeaturesCover, Feed Through, Salt Water ResistantIngress ProtectionH6667/69K - Dust Tight, Water Resistant, WaterproofHousing Finish-Qperating Temperature40°C ~ 125°C	Category	Connectors, Interconnects	
Series   HEAVYCON? EVO     Connector Type   Base - Box Mount     Style   Side Entry     Size   B6     Lock Location   Locking Clip (1) on Base Bottom     Thread Size   M25     Size / Dimension   3.307" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)     Features   Cover, Feed Through, Salt Water Resistant     Ingress Protection   P66/67/69K - Dust Tight, Water Resistant, Waterproof     Housing Finish   -     Housing Finish   -     Operating Temperature   440°C ~ 125°C		Heavy Duty Connectors - Housings, Hoods, Bases	
Connector TypeBase - Box MountStyleSide EntrySizeB6Lock LocationLocking Clip (1) on Base BottomThread SizeM25Size / Dimension3.007" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)Housing Color-FeaturesCover, Feed Through, Salt Water Resistant, OuterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Package	-	
StyleSide EntrySizeB6Lock LocationLocking Clip (1) on Base BottomThread SizeM25Size / Dimension3.307" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)Housing Color-FeaturesCover, Feed Through, Salt Water ResistantIngress ProtectionPB6/67/69K - Dust Tight, Water Resistant, WaterproofHousing Kharial-Housing Finish-Operating Temperature440°C ~ 125°C	Series	HEAVYCON? EVO	
SizeB6Lock LocationLocking Clip (1) on Base BottomThread SizeM25Size / Dimension3.307" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)Housing Color-FeaturesCover, Feed Through, Salt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing Finish-Housing Finish-Operating Temperature-40°C ~ 125°C	Connector Type	Base - Box Mount	
Lock LocationLocking Clip (1) on Base BottomThread SizeM25Size / Dimension3.307" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)Housing Color-FeaturesCover, Feed Through, Salt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing Finish-Housing Finish-Operating Temperature40°C ~ 125°C	Style	Side Entry	
Thread SizeM25Size / Dimension3.307" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)Housing Color-FeaturesCover, Feed Through, Salt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Size	B6	
Size / Dimension3.307" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)Housing Color-FeaturesCover, Feed Through, Salt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Lock Location	Locking Clip (1) on Base Bottom	
Housing Color-FeaturesCover, Feed Through, Salt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Thread Size	M25	
FeaturesCover, Feed Through, Salt Water ResistantIngress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Size / Dimension	3.307" L x 2.047" W x 2.150" H (84.00mm x 52.00mm x 54.60mm)	
Ingress ProtectionIP66/67/69K - Dust Tight, Water Resistant, WaterproofHousing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Housing Color	-	
Housing MaterialAluminum, Die CastHousing Finish-Operating Temperature-40°C ~ 125°C	Features	Cover, Feed Through, Salt Water Resistant	
Housing Finish-Operating Temperature-40°C ~ 125°C	Ingress Protection	IP66/67/69K - Dust Tight, Water Resistant, Waterproof	
Operating Temperature $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$	Housing Material	Aluminum, Die Cast	
	Housing Finish	-	
Report errors?	Operating Temperature	-40°C ~ 125°C	
			Report errors?

#### 1412826 Guarantees

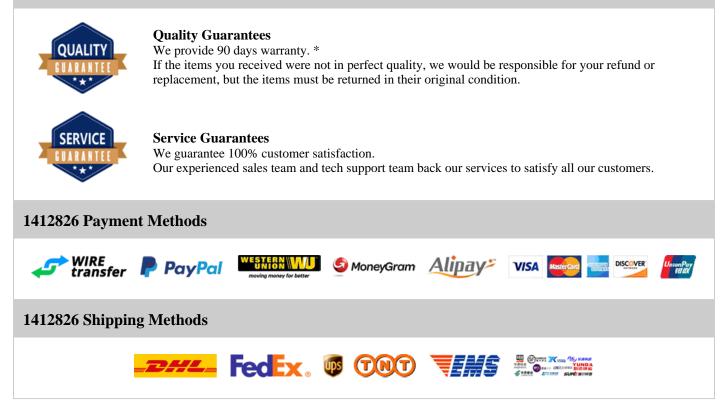

If you have any question about 1412826, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com