

1440012

1440012 Information

Heisener.com	Part Number Manufacturer Category Description Package	1440012 Phoenix Contact Connectors, Interconnects Circular Connectors CONN PLUG 5POS INLINE PIN M12 - For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



1440012 Specifications

ManufacturerPhoenix ContactCategoryConnectors, InterconnectsCircular ConnectorsPackage-SeriesSACCConnector TypePlug, Male PinsNumber of Positions5Shell Size - InsertM12-5Mounting TypeFree Hanging (In-Line)FerminationScrewFastening TypeThreadedOrientationPhoenix Contact Tight, Water Resistant, WaterproofShell Material, FinishGoldFeaturesShellededKotage - RatedSolutionKotage - RatedSolution<			
CategoryConnectors, InterconnectsCircular ConnectorsPackage-SeriesSACCConnector TypePlug, Male PinsConnector TypeM12-5Shell Size - InsertM12-5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)ParminationScrewFastening TypeThreadedOrientationAShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - RatedGOVCurrent Rating4A	Manufacturer Part Number	1440012	
InterfactCircular ConnectorsPackage-SeriesSACCConnector TypePlug, Male PinsNumber of Positions5Shell Size - InsertM12-5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)FereninationScrewFastening TypeThreadedOrientationAShell Material, FinishStellShell Material, FinishStellFeaturesGoldVoltage - RatedSiveCurrent Rating60V	Manufacturer	Phoenix Contact	
Package-SeriesSACCConnector TypePlug, Male PinsNumber of Positions5Shell Size - InsertM12-5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)FarminationScrewDrientationADrientationPos/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishStellContact FinishGoldVoltage - RatedShieldedVoltage - Rated60VCurrent Rating64	Category	Connectors, Interconnects	
SeriesSACCConnector TypePlug, Male PinsNumber of Positions5Shell Size - InsertM12-5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)FerminationScrewFastening TypeThreadedOrientationAIngress ProtectionH65/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - RatedGoVCurrent Rating4A		Circular Connectors	
Connector TypePlug, Male PinsNumber of Positions5Shell Size - InsertM12-5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)ForminationScrewFastening TypeThreadedOrientationAIngress ProtectionH96/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - RatedGNCurrent Rating4A	Package	-	
Number of Positions5Shell Size - InsertM12-5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)Mounting TypeScrewFastening TypeThreadedOrientationAIngress ProtectionIb5/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishSheldedFeaturesShieldedVoltage - Rated60VCurrent Rating4A	Series	SACC	
Shell Size - InsertM12-5Shell Size, MIL-Mounting TypeFree Hanging (In-Line)ForminationScrewFastening TypeThreadedOrientationAIngress ProtectionIP65/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - Rated60VCurrent Rating4A	Connector Type	Plug, Male Pins	
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)FerminationScrewFastening TypeThreadedOrientationAOrientationP65/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - Rated60VCurrent Rating4A	Number of Positions	5	
Mounting TypeFree Hanging (In-Line)FerminationScrewFastening TypeThreadedOrientationAIngress ProtectionIP65/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - Rated60VKurrent Rating4A	Shell Size - Insert	M12-5	
TerminationScrewFastening TypeThreadedOrientationAIngress ProtectionIP65/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - Rated60VCurrent Rating4A	Shell Size, MIL	-	
Fastening TypeThreadedOrientationAIngress ProtectionIP65/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - Rated60VCurrent Rating4A	Mounting Type	Free Hanging (In-Line)	
DefinitionAIngress ProtectionIP65/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - Rated60VCurrent Rating4A	Termination	Screw	
Ingress ProtectionIP65/67/69K - Dust Tight, Water Resistant, WaterproofShell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - Rated60VCurrent Rating4A	Fastening Type	Threaded	
Shell Material, FinishSteelContact FinishGoldFeaturesShieldedVoltage - Rated60VCurrent Rating4A	Orientation	A	
Contact FinishGoldFeaturesShieldedVoltage - Rated60VCurrent Rating4A	Ingress Protection	IP65/67/69K - Dust Tight, Water Resistant, Waterproof	
FeaturesShieldedVoltage - Rated60VCurrent Rating4A	Shell Material, Finish	Steel	
Voltage - Rated60VCurrent Rating4A	Contact Finish	Gold	
Current Rating 4A	Features	Shielded	
-	Voltage - Rated	60V	
Report errors?	Current Rating	4A	
			Report errors?

1440012 Guarantees

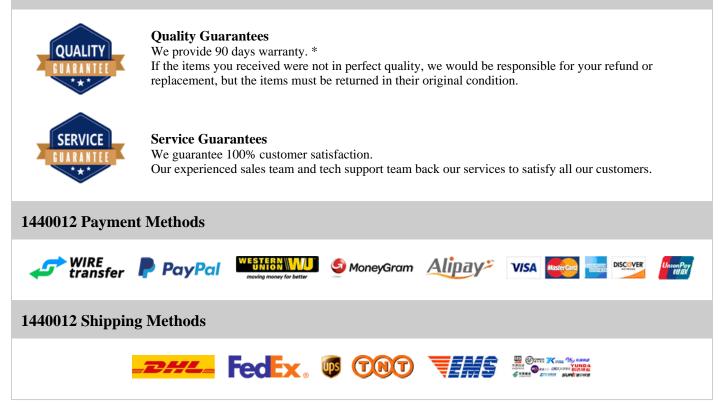

If you have any question about 1440012, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com