

15210205601000

Quote

15210205601000 Information

Containance parts here	Part Number	15210205601000	
	Manufacturer	HARTING	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	STRAIGHT FEMALE 6.25MM	2852
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



15210205601000 Specifications

Manufacturer Part Number15210205601000ManufacturerHARTINGCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMar-flex?Connector TypeReceptacleContact TypeFemale SocketSyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPich - Mating0.050° (1.27mm)Number of Rows2Rowspacing - MatingSolderMounting TypeSolderString TypeSolderContact Finish - MatingSolderContact Finish - MatingSolderString TypeBack AdderMounting TypeSolderString TypeSolderString TypeSolderContact Finish - MatingGoldContact Finish - MatingSolderString TypeSolderString		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Serieshar-flex?Connector TypeReceptacleConnector TypeReceptacleContact TypeBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPich - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingGoldInsulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Manufacturer Part Number	15210205601000
AckageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Serieshar-flex?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountFreminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorHackInsulation Finish - MatingJackInsulation Finish - MatingJackContact Finish Thickness - MatingJackInsulation Finish - MatingJack <td>Manufacturer</td> <td>HARTING</td>	Manufacturer	HARTING
Package-Serieshar-flex?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolferTerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - Mating2.4µin (0.6µm)Insulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Category	Connectors, Interconnects
Serieshar-flex?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBackInsulation Height0.246" (6.25mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingBackInsulation ColorJ.44µi (0.06µm)Insulation Height0.46" (6.25mm)Contact Length - Post-	Series	har-flex?
StyleBoard to Board or CableStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Connector Type	Receptacle
Number of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating6/dlInsulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Style	Board to Board or Cable
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2.4µin (0.06µm)Insulation ColorBlackContact Length - Post.	Number of Positions	20
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2.4µin (0.06µm)Insulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2.4µin (0.06µm)Insulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2.4µin (0.06µm)Insulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2.4µin (0.06µm)Insulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2.4µin (0.06µm)Insulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating2.4µin (0.06µm)Insulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating2.4µin (0.06µm)Insulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.246" (6.25mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.246" (6.25mm)Contact Length - Post-	Contact Finish Thickness - Mating	2.4µin (0.06µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.246" (6.25mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	8mm ~ 11mm
Ingress Protection	-
Features	Board Guide, Pick and Place, Solder Retention
	Banort arrows

Report errors?

15210205601000 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

15210205601000 Payment Methods

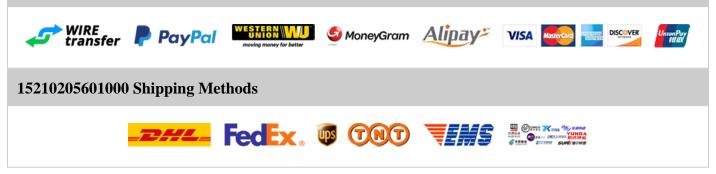

If you have any question about 15210205601000, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com