

# 162H36

## **162H36 Information**



### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **162H36 Specifications**

Manufacturer Part Number 162H36   Manufacturer Hammond Manufacturing   Category Transformers   Package -   Series 162   Type Laminated Core   Voltage - Primary 115V, 230V   Voltage - Secondary (Full Load) Parallel 18V, Series 36V   Current - Output (Max) Parallel 1.1A, Series 550mA   Primary Winding(s) Dual   Secondary Winding(s) Dual   Power - Max 20 VA   Mounting Type Through Hole   Termination Style PC Pin   Size / Dimension 57.15mm L x 47.63mm W   Voltage - Isolation 2500Vrms		
CategoryTransformersPackage-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 1.1A, Series 550mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleSize / Dimension57.15mm L x 47.63mm WSize / Dimension36.52mmVoltage - IsolationScoordsmulterWidty - Sectod (Max)36.02mmWidty - Sectod (Max)36.02mmSize / DimensionScoordsmulterWidty - IsolationScoordsmulterWidty - Sectod (Max)36.52mmWidty - Sectod (Max)ScoordsmulterWidty - Secto	Manufacturer Part Number	162H36
Power TransformersPackage-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 1.1A, Series 550mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation500VrmsWeight0.8 lb (362.87g)	Manufacturer	Hammond Manufacturing
Package-Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 1.8V, Series 36VCurrent - Output (Max)Parallel 1.1A, Series 550mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleSize / DimensionS7.15mm L x 47.63mm WSize / Dimension36.52mmVoltage - IsolationS00VrmsWeightSuntWeightSale (Salez, Srg)	Category	Transformers
Series162TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 1.1A, Series 550mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StyleS7.15mm L x 47.63mm WSize / Dimension36.52mmVoltage - IsolationS00VrmsWeight0.8 lb (362.87g)		Power Transformers
TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 1.1A, Series 550mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StyleSci Jimm L x 47.63mm WSize / Dimension36.52mmVoltage - IsolationS00VrmsWeight0.8 lb (362.87g)	Package	-
YeNoVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 1.1A, Series 550mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StyleSc1.5mm L x 47.63mm WSize / Dimension36.52mmHeight - Seated (Max)2500VrmsWotage - Isolation0.8 lb (362.87g)	Series	162
Voltage - Secondary (Full Load)Parallel 18V, Series 36VCurrent - Output (Max)Parallel 1.1A, Series 550mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Туре	Laminated Core
Current - Output (Max)Parallel 1.1A, Series 550mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation500VrmsWeight0.8 lb (362.87g)	Voltage - Secondary (Full Load)	Parallel 18V, Series 36V
Secondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Current - Output (Max)	Parallel 1.1A, Series 550mA
Center TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Primary Winding(s)	Dual
Power - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Center Tap	No
Termination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Power - Max	20 VA
Size / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.52mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Mounting Type	Through Hole
Height - Seated (Max)36.52mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Termination Style	PC Pin
Voltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Size / Dimension	57.15mm L x 47.63mm W
Weight 0.8 lb (362.87g)	Height - Seated (Max)	36.52mm
	Voltage - Isolation	2500Vrms
Report errors?	Weight	0.8 lb (362.87g)
		Report errors?

#### **162H36 Guarantees**

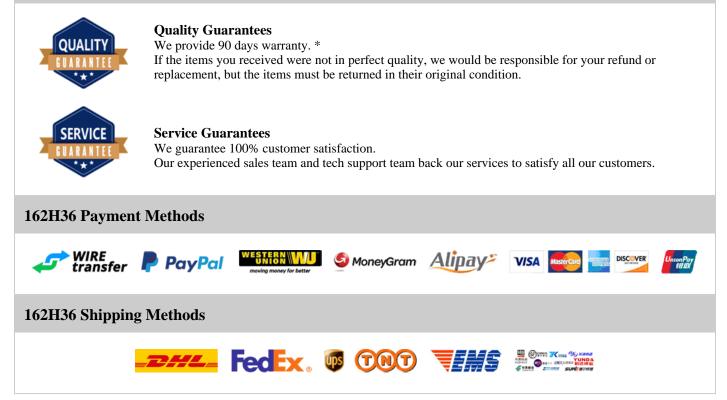

If you have any question about 162H36, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com