


180-015-202-031

180-015-202-031 Information

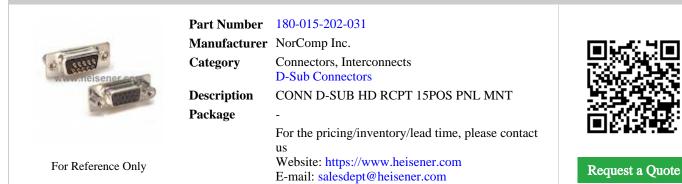

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



180-015-202-031 Specifications

ManufacturerNorComp Inc.CategoryConnectors, InterconnectsD-Sub ConnectorsD-Sub ConnectorsPackage-Series180Connector StyleD-Sub High DensityConnector TypeReceptacle, Female SocketsNumber of Positions15Number of Rows3Shell Size, Connector LayoutSignalMunting TypeSolder CupFaturesSolder CupFaturesSolder CupFortight Site, SinshSceptacle SocketsStell State, SinshSolder CupStell Size, Connector LayoutSignalContact TypeSolder CupFaturesSolder CupFaturesSolder CupFortight Site, SinshScell, SinshContact FinishStell SinshContact FinishStell SinshStell Site, SinshScell SinshStell Site, SinshSinshStell Site, SinshSinshSite, SinshSinshSite, SinshSinshSite, SinshSinshSite, SinshSinshSite, SinshSinshSite, SinshSinshSite, SinshSinsh <td< th=""><th></th><th></th></td<>		
CategoryConnectors, Interconnects D-Sub ConnectorsPackage-Series180Connector StyleD-Sub, High DensityConnector TypeReceptacle, Female SocketsNumber of Positions15Number of Rows3Shell Size, Connector LayoutIDE, E) High DensityContact TypeSignalMounting TypePanel MountFlange FeatureSolder CupFeatures-Shell Material, FinishSteel, Tin PlatedContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Manufacturer Part Number	180-015-202-031
PackageD-Sub ConnectorsPackage-Series180Connector StyleD-Sub, High DensityConnector TypeReceptacle, Female SocketsNumber of Positions15Number of Rows3Shell Size, Connector Layout1 (DE, E) High DensityContact TypeSignalMounting TypePanel MountFlange FeatureMating Side (4-40)Features-Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Manufacturer	NorComp Inc.
Package-Series180Connector StyleD-Sub, High DensityConnector TypeReceptacle, Female SocketsNumber of Positions15Number of Rows3Shell Size, Connector LayoutIDE, EJ High DensityContact TypeSignalMounting TypePanel MountFlange FeatureSolder CupFeatures-Shell Material, FinishSiel, Tin PlatedContact FinishGoldContact FinishSiel, Tin PlatedContact Finish ThicknessFlashIngress Protection-Metrial Flammability RatingUL94 V-0	Category	Connectors, Interconnects
Series180Connector StyleD-Sub, High DensityConnector TypeReceptacle, Female SocketsNumber of Positions15Number of Rows3Shell Size, Connector LayoutI (DE, E) High DensityContact TypeSignalMounting TypePanel MountFlange FeatureSolder CupFeatures-Shell Material, FinishStel, Tin PlatedContact FinishGoldContact Finish ThicknessFlanshIngress Protection-Material Flanmability RatingUL94 V-0		D-Sub Connectors
Connector StyleD-Sub, High DensityConnector TypeReceptacle, Female SocketsNumber of Positions15Number of Rows3Shell Size, Connector LayoutI (DE, E) High DensityContact TypeSignalMounting TypePanel MountFlange FeatureSolder CupFeatures-Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Package	-
Connector TypeReceptacle, Female SocketsNumber of Positions15Number of Rows3Shell Size, Connector Layout1 (DE, E) High DensityContact TypeSignalMounting TypePanel MountFlange FeatureSolder CupFeatures-Shell Material, FinishStel, Tin PlatedContact Finish ThicknessGoldIngress Protection-Material Flangmability RatingUL94 V-0	Series	180
Number of Positions15Number of Rows3Shell Size, Connector Layout1 (DE, E) High DensityContact TypeSignalMounting TypePanel MountFlange FeatureMating Side (4-40)TerminationSolder CupFeatures-Shell Material, FinishSteel, Tin PlatedContact Finish ThicknessFlanghIngress Protection-Material Flammability RatingUL94 V-0	Connector Style	D-Sub, High Density
Number of Rows3Number of Rows1 (DE, E) High DensityShell Size, Connector Layout1 (DE, E) High DensityContact TypeSignalMounting TypePanel MountFlange FeatureMating Side (4-40)TerminationSolder CupFeatures-Shell Material, FinishSteel, Tin PlatedContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Connector Type	Receptacle, Female Sockets
Shell Size, Connector Layout1 (DE, E) High DensityContact TypeSignalMounting TypePanel MountFlange FeatureMating Side (4-40)TerminationSolder CupFeatures-Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Number of Positions	15
Contact TypeSignalMounting TypePanel MountFlange FeatureMating Side (4-40)TerminationSolder CupFeatures-Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish FinishFlashIngress Protection-Material Flanmability RatingUL94 V-0	Number of Rows	3
Mounting TypePanel MountFlange FeatureMating Side (4-40)TerminationSolder CupFeatures-Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Shell Size, Connector Layout	1 (DE, E) High Density
Flange FeatureMating Side (4-40)TerminationSolder CupFeatures-Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Contact Type	Signal
TerminationSolder CupFeatures-Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Mounting Type	Panel Mount
Features-Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Flange Feature	Mating Side (4-40)
Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Termination	Solder Cup
Contact FinishGoldContact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Features	-
Contact Finish ThicknessFlashIngress Protection-Material Flammability RatingUL94 V-0	Shell Material, Finish	Steel, Tin Plated
Ingress Protection-Material Flammability RatingUL94 V-0	Contact Finish	Gold
Material Flammability Rating UL94 V-0	Contact Finish Thickness	Flash
	Ingress Protection	-
Report errors?	Material Flammability Rating	UL94 V-0
		Report errors?

180-015-202-031 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

180-015-202-031 Payment Methods





If you have any question about 180-015-202-031, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com