


# 6LR471KCDCA

### 6LR471KCDCA Information

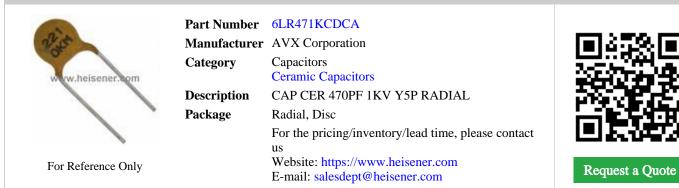

# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# 6LR471KCDCA Specifications

| <table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container> |                          |                     |
|--|--------------------------|---------------------|
| Arror Capacitors   Package Radial, Disc   Series Radial, Disc   Capacitance 470pF   Capacitance 470pF   Tolerance 410%   Voltage - Rated 1000V (1kV)   Tomperature Coefficient 40°C ~ 125°C   Operating Temperature -   Ratings -   Applications General Purpose   Faitures Rate -   Mounting Type -   Package / Case Radial, Disc   Size / Dimension 0.276° Diart.000000000000000000000000000000000000  | Manufacturer Part Number | 6LR471KCDCA         |
| Indext Ceramic CapacitorsPackageRadial, DiscSeries-Capacitance470pFTolerance±10%Voltage - Rated1000V (1kV)Temperature CoefficientYSP (B)Operating Temperature-40°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeStrong HolePackage / CaseRadial, DiscSize / Dimension0.276° Dia (7.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Manufacturer             | AVX Corporation     |
| PackageRadial, DiscSeries-Capacitance470pFTolerance±10%Voltage Rated1000V (1kV)Temperature CoefficientY5P (B)Operating Temperature-40°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Noutring TypeHoleSize / Dimension0.276° Dia (7.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Category                 | Capacitors          |
| Series-Capacitance470pFTolerance±10%Voltage - Rated1000V (1kV)Temperature CoefficientY5P (B)Operating Temperature-40°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.276° Dia (7.00mm)Height - Seated (Max)0.157" (4.00mm)Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight  |                          | Ceramic Capacitors  |
| Capacitance470pFTolerance±10%Voltage - Rated1000V (1kV)Temperature CoefficientV5P (B)Operating Temperature-40°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeMouge HoleSize / Dimension0.276° Dia (7.00mm)Height - Seated (Max)0.157" (4.00mm)Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Package                  | Radial, Disc        |
| Tolerance±10%Voltage - Rated1000V (1kV)Temperature CoefficientY5P (B)Operating Temperature-40°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHolePackage / CaseRadial, DiscSize / Dimension0.276° Dia (7.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Series                   | -                   |
| Voltage - Rated1000V (lkV)Temperature CoefficientV5P (B)Operating Temperature-40°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.276" Dia (7.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight  | Capacitance              | 470pF               |
| Temperature CoefficientY5P (B)Operating Temperature-40°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.276° Dia (7.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.394° (10.00mm)Lead StyleStraight  | Tolerance                | ±10%                |
| Operating Temperature-40°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHolePackage / CaseRadial, DiscSize / Dimension0.276° Dia (7.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight  | Voltage - Rated          | 1000V (1kV)         |
| Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.276" Dia (7.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Temperature Coefficient  | Y5P (B)             |
| Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.276" Dia (7.00mm)Height - Seated (Max)0.157" (4.00mm)Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Operating Temperature    | -40°C ~ 125°C       |
| ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.276" Dia (7.00mm)Height - Seated (Max)0.157" (4.00mm)Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Features                 | -                   |
| Failure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.276" Dia (7.00mm)Height - Seated (Max)0.157" (4.00mm)Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight  | Ratings                  | -                   |
| Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.276" Dia (7.00mm)Height - Seated (Max)0.157" (4.00mm)Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Applications             | General Purpose     |
| Package / CaseRadial, DiscSize / Dimension0.276" Dia (7.00mm)Height - Seated (Max)0.157" (4.00mm)Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight  | Failure Rate             | -                   |
| Size / Dimension0.276" Dia (7.00mm)Height - Seated (Max)0.157" (4.00mm)Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight  | Mounting Type            | Through Hole        |
| Height - Seated (Max)0.157" (4.00mm)Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Package / Case           | Radial, Disc        |
| Thickness (Max)-Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Size / Dimension         | 0.276" Dia (7.00mm) |
| Lead Spacing0.394" (10.00mm)Lead StyleStraight   | Height - Seated (Max)    | 0.157" (4.00mm)     |
| Lead Style Straight  | Thickness (Max)          | -                   |
|  | Lead Spacing             | 0.394" (10.00mm)    |
|  | Lead Style               | Straight            |
| Report errors?   |                          | Report errors?      |

#### **6LR471KCDCA Guarantees**



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# 6LR471KCDCA Payment Methods



## 6LR471KCDCA Shipping Methods



If you have any question about 6LR471KCDCA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com