


97-3106A-18-10S(946)

97-3106A-18-10S(946) Information

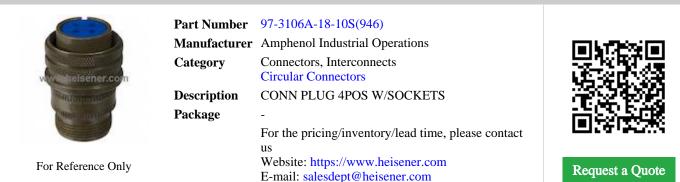

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



97-3106A-18-10S(946) Specifications

Manufacturer Part Number 97.3106A-18-10S(946) Manufacturer Amphenol Industrial Operations Category Connectors, Interconnects Package - Series 97 Connector Type Plug, Female Sockets Number of Positions 4 Shell Size - Insert 18-10 Mounting Type Free Hanging (In-Line) Termination Solder Cup Termination Solder Cup Nigers Protection - Shell Material, Finish Aluminum, Zinc Plated, Black Contact Finish Silver Features - Voltage - Rated SOVAC, 700VDCC		
CategoryConnectors, Interconnects Circular ConnectorsPackage-Series97Connector TypePlug, Female SocketsNumber of Positions4Shell Size - Insert18-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact Finish-Yoltage - Rated500VAC, 700VDCCurrent Rating23A	Manufacturer Part Number	97-3106A-18-10S(946)
Initial ConnectorsPackage-Series97Connector TypePlug, Female SocketsNumber of Positions4Shell Size - Insert18-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating33A	Manufacturer	Amphenol Industrial Operations
Package-Series97Connector TypePlug, Female SocketsNumber of Positions4Shell Size - Insert18-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating33A	Category	Connectors, Interconnects
Series97Connector TypePlug, Female SocketsNumber of Positions4Shell Size - Insert18-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishSilverContact FinishSilverFastening-Fortures-Shell Material, FinishSilverContact Finish-Statures		Circular Connectors
Connector TypePlug, Female SocketsNumber of Positions4Shell Size - Insert18-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Package	-
Number of Positions4Number of Positions18-10Shell Size - Insert18-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact Finish-Features-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Series	97
Shell Size - Insert18-10Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishsilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Connector Type	Plug, Female Sockets
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent RatingSilva	Number of Positions	4
Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Shell Size - Insert	18-10
TerminationSolder CupFastening TypeThreadedOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating33A	Shell Size, MIL	-
Fastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Mounting Type	Free Hanging (In-Line)
OrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Termination	Solder Cup
Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Fastening Type	Threaded
Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Orientation	N (Normal)
Contact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Ingress Protection	-
Features-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Shell Material, Finish	Aluminum, Zinc Plated, Black
Voltage - Rated500VAC, 700VDCCurrent Rating23A	Contact Finish	Silver
Current Rating 23A	Features	-
-	Voltage - Rated	500VAC, 700VDC
Report errors?	Current Rating	23A
		Report errors?

97-3106A-18-10S(946) Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

97-3106A-18-10S(946) Payment Methods





If you have any question about 97-3106A-18-10S(946), please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com