

BCS-146-L-S-DE

BCS-146-L-S-DE Information

	Manufacturer	BCS-146-L-S-DE Samtec Inc. Connectors, Interconnects	
Heisener.com	Category	Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	BOX CONNECTOR SOCKET STRIP	22 - 37 - 52 - 37 - 52 - 52 - 52 - 52 - 52 - 52 - 52 - 5
	Package	-	国家経営
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BCS-146-L-S-DE Specifications

Manufacturer Part NumberBCS-146-L-S-DEManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claney BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions46Number of Positions LoadedIlNumber of Rows1Number of Rows1.00° (2.54mm)Number of Rows1.010° (2.54mm)Yeng PatherSolderFreminationSolderSteining TypeOddOtact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingJupio (2.54mm)Contact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingJupio (2.54mm)Contact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingJupio (2.54mm)Contact Finish - MatingJupio (2.54mm)Insulation ColorBackInsulation ColorJupio (2.54mm)Contact Finish - MatingJupio (2.54mm)Contact Finish - MatingJupio (2.54mm)Contact Finish - MatingJupio (2.54mm)Contact Finish - MatingJupio (2.54mm)Contact Finish - MatingJu		
CategoryConnectors - Headers, Receptacles, Female SocketsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllNumber of Rows1Number of Rows1Number of RowsSolderNumber of RowsSolderStyleSolderStoring TypeSolderContact Finish - MatingGoldContact Finish - MatingInpun (25µm)Studion ColorBiakInsulation ColorBiakInsulation FlexiptSolor (25µm)Studion Flex	Manufacturer Part Number	BCS-146-L-S-DE
HeadeanRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeBoard to BoardStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Youring TypeOlderTerminationSolderFastening TypeJush-PullContact Finish - MatingOldu (0.5µm)Contact Finish Thickness - MatingIupin (0.5µm)Insulation ColorBlackInsulation Height0.200° (7.37mm)Contact Length - Post0.120° (3.05mm)Operating Temperature-55° C + 125°C	Manufacturer	Samtec Inc.
Package-SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeUpin (0.25µm)Contact Finish - MatingGoldContact Finish Thickness - MatingIlpin (0.25µm)Insulation ColorBlackInsulation Height0.290° (7.37mm)Contact Length - Post0.120° (3.05mm)Operating Temperature-55° C ~ 125°C	Category	Connectors, Interconnects
SeriesTiger Claw? BCSConnector TypeReceptacle, Bottom or Top EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllNumber of Rows1Number of Rows1Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Station ColorBackInsulation ColorBlackInsulation Height0.200" (7.37mm)Contact Fungt-Post1.20" (3.05mm)Contact Fungt-Post5°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector Type Receptacle, Bottom or Top Entry Contact Type Female Socket Style Board to Board Number of Positions 46 Number of Positions Loaded All Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Contact Finish - Mating Gold Contact Finish - Mating Gold Contact Finish - Mating Board Solder Inpuint (0.25µm) Contact Finish - Mating Solder Insulation Color Black Insulation Height 0.290° (7.37mm) Contact Length - Post 0.120° (3.05mm)	Package	-
Contact TypeFenale SocketStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.200° (7.37mm)Contact Fungerature0.120° (3.05mm)Operating Temperature-55°C ~ 125°C	Series	Tiger Claw? BCS
StyleBoard to BoardStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIoµin (0.25µm)Insulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle, Bottom or Top Entry
Number of Positions 46 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Yourge Type Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Insulation Color Black Insulation Height 0.290" (7.37mm) Ocntact Length - Post 0.120" (3.05mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.200" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature55°C ~ 125°C	Number of Positions	46
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.290" (7.37mm)Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.290" (7.37mm) Contact Length - Post 0.120" (3.05mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post0.120" (3.05mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.290" (7.37mm)
	Contact Length - Post	0.120" (3.05mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

BCS-146-L-S-DE Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BCS-146-L-S-DE Payment Methods

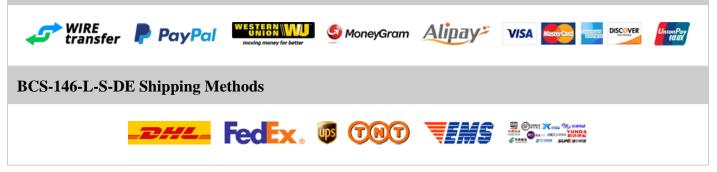

If you have any question about BCS-146-L-S-DE, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com