

BKS-111-01-F-V-A-TR

BKS-111-01-F-V-A-TR Information

	Part Number Manufacturer Category	BKS-111-01-F-V-A-TR Samtec Inc. Connectors, Interconnects	
Heisener.com	Cuttgory	Rectangular Connectors - Headers, Receptacles, Female Sockets	2000 C
	Description	1MM SURFACE MOUNT SOCKET	
	Package	-	「回望を光
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



BKS-111-01-F-V-A-TR Specifications

Manufacturer Part NumberBKS-111-01-F-V-A-TRManufacturerSantec Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesBKSConnector TypeSocketContact TypeSocketStyleBoard to BoardNumber of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderContact Finish - MatingSolderContact Finish - MatingSolderSurface MountSolderContact Finish - MatingSolderSurface MountSolderIterminationSolderContact Finish - MatingSolderSurface MountSolderContact Finish - MatingSolderContact Finish - MatingSolderContact Finish - MatingSolderInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series BKS Connector Type Socket Connector Type Socket Style Board to Board Number of Positions 11 Number of Positions Loaded All Number of Rows 2 Row Spacing - Mating 0.039" (1.00mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type Solder Fernination Solder Forther Shafting Solder Forther Shafting Solder Contact Finish - Mating Gold Contact Finish Finkenses - Mating Jin (0.08µm) Insulation Color Black Insulation Height 0.084" (2.14mm)	Manufacturer Part Number	BKS-111-01-F-V-A-TR
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesBKSConnector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions11Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSufface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)	Manufacturer	Samtec Inc.
Package-SeriesBKSConector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions11Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFastening TypeSolderForntart Finish - MatingGoldContact Finish - MatingGoldStrafen SpaceJin (0.08µm)Fastening TypeBuskInsulation ColorBlackInsulation Height0.084" (2.14mm)	Category	Connectors, Interconnects
SeriesBKSConnector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions11Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions1Number of Positions LoadedAllNumber of Rows0.039" (1.00mm)Number of Rows0.100" (2.54mm)Row Spacing - MatingSolderMounting TypeSolderFareninationSolderContact Finish - MatingGoldContact Finish Thickness - MatingBiackInsulation ColorBiackInsulation Height0.084" (2.14mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions11Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Series	BKS
StyleBoard to BoardNumber of Positions11Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBiackInsulation Height0.084" (2.14mm)	Connector Type	Socket
Yumber of PositionsI1Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Style	Board to Board
Pitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Number of Positions	11
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Pitch - Mating	0.039" (1.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)	Contact Finish - Mating	Gold
Insulation Height 0.084" (2.14mm)	Contact Finish Thickness - Mating	3µin (0.08µm)
-	Insulation Color	Black
Contact Length - Post -	Insulation Height	0.084" (2.14mm)
	Contact Length - Post	-
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin	
Mated Stacking Heights	4.14mm, 4.5mm, 5mm, 6mm, 7mm	
Ingress Protection	-	
Features	-	
		Report errors?

BKS-111-01-F-V-A-TR Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

BKS-111-01-F-V-A-TR Payment Methods

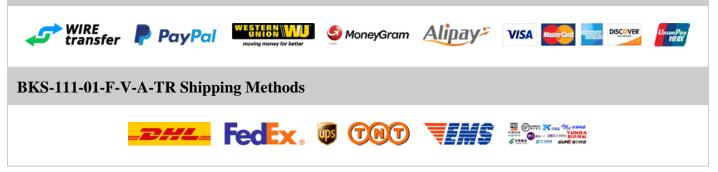

If you have any question about BKS-111-01-F-V-A-TR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com