


CMF55249K00BER670

CMF55249K00BER670 Information

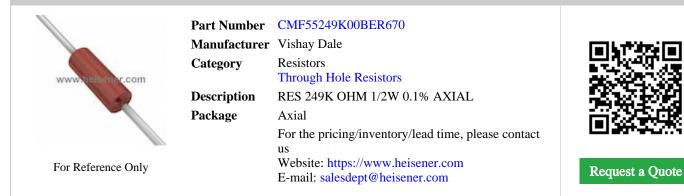

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF55249K00BER670 Specifications

Manufacturer Part NumberCMF55249K00BER670ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance249 kOhmsTolerance0.1%Power (Watts)0.5% 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyPorting Temperature Coefficient25°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.90° Dia x 0.240° L (2.29mm x 6.10mm)Fieight - Seated (Max)2Annuber of Terminations2Failure Rate-Failure Rate-Failure Rate-Stare for the seated (Max)-Stare for		
CategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance249 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2	Manufacturer Part Number	CMF55249K00BER670
Through Hole ResistorsPackageAxialSeriesCMFResistance249 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance249 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2	Category	Resistors
SeriesCMFResistance249 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2		Through Hole Resistors
Resistance249 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature55°C ~ 175°CPackage / CaseAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Number of Terminations2	Package	Axial
Tolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55° C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2	Series	CMF
Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Resistance	249 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Tolerance	$\pm 0.1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Power (Watts)	0.5W, 1/2W
Temperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Temperature Coefficient	±25ppm/°C
Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Operating Temperature	-55°C ~ 175°C
NameNameSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2	Supplier Device Package	Axial
Number of Terminations 2	Size / Dimension	0.090" Dia x 0.240" L (2.29mm x 6.10mm)
	Height - Seated (Max)	-
Failure Rate -	Number of Terminations	2
	Failure Rate	-
Report errors?		Report errors?

CMF55249K00BER670 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

CMF55249K00BER670 Payment Methods





If you have any question about CMF55249K00BER670, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com