


CMF6068K100FHEK

CMF6068K100FHEK Information

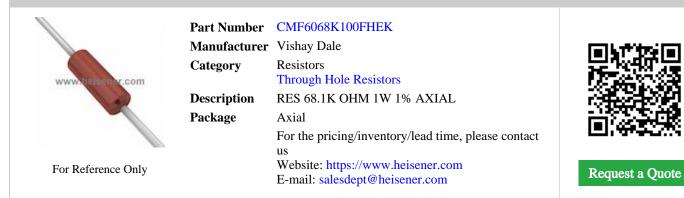

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF6068K100FHEK Specifications

ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance68.1 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPokage / CaseAxialSupplier Device PackageAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2		
CategoryResistorsPackageAxialPackageCMFResistance68.1 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-Failure Rate- <tr< td=""><td>Manufacturer Part Number</td><td>CMF6068K100FHEK</td></tr<>	Manufacturer Part Number	CMF6068K100FHEK
Through Hole ResistorsPackageAxialPackageCMFResistance68.1 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTopperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-Failure Rate-<	Manufacturer	Vishay Dale
PackageAxialSeriesCMFResistance68.1 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-	Category	Resistors
Series CMF Resistance 68.1 kOhms Tolerance ±1% Power (Watts) IW Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Poper (Yats) ±50ppm/°C Operating Temperature -55°C ~ 175°C Package / Case Axial Supplier Device Package Axial Size / Dimension 0.145" Dia x 0.344" L (3.68mm x 8.74mm) Height - Seated (Max) 2 Failure Rate -		Through Hole Resistors
Resistance68.1 kOhmsTolerance±1%Power (Watts)1WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Aunaber of Terminations2Failure Rate-	Package	Axial
Tolerance±1%Power (Watts)1WCompositionMetal FilmCompositionFame Retardant Coating, Moisture Resistant, SafetyFeatures±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Resistance	68.1 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	1W
Temperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±50ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations 2 Failure Rate -	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

CMF6068K100FHEK Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF6068K100FHEK Payment Methods



If you have any question about CMF6068K100FHEK, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com