

CPCC0275R00JB32

CPCC0275R00JB32 Information



Part Number	CPCC0275R00JB32	
Manufacturer	Vishay Dale	
Category	Resistors Through Hole Resistors	
Description	RES 75 OHM 2W 5% RADIAL	
Package	Radial	
	For the pricing/inventory/lead time, please contact	
us		
Website: https://www.heisener.com		
	E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CPCC0275R00JB32 Specifications

Manufacturer Part NumberCPCC0275R00JB32ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageRadialSeriesCPCCResistance75 OhmsTolerance±5%Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyPoperature Coefficient±300pm/°COperating Temperature65°C ~ 275°CPackage / CaseRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Failure Rate- <th></th> <th></th>		
CategoryResistorsThrough Hole ResistorsPackagePackageRadialSeriesCPCCResistance75 OhmsTolerance±5%Power (Watts)CompositionFeaturesFlame Proof, SafetyTomperature Coefficient±300ppm/°COperating Temperature65°C ~ 275°CPackage / CaseSupplier Device PackageSize / DimensionHeight - Seated (Max)Number of Terminations2Failure RateFailure Rate <td< td=""><td>Manufacturer Part Number</td><td>CPCC0275R00JB32</td></td<>	Manufacturer Part Number	CPCC0275R00JB32
Through Hole ResistorsPackageRadialPackageCPCCResistance75 OhmsTolerance±5%Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyTomperature Coefficient±300pm/°COperating Temperaturee65°C ~ 275°CPackage / CaseRadial LeadSupplier Device Package0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Failure	Manufacturer	Vishay Dale
PackageRadialSeriesCPCCResistance75 OhmsTolerance±5%Power (Wats)2WCompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±300pm/°COperating Temperaturee6°C ~ 275°CPackage / CaseRadial LeadSupplier Device Package0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Category	Resistors
Series CPCC Resistance 75 Ohms Tolerance ±5% Power (Watts) 2W Composition Wirewound Features Flame Proof, Safety Operating Temperature ±300ppm/°C Operating Temperature edial Supplier Device Package Radial Lead Size / Dimension 0.807" (20.50mm) Number of Terminations 2 Failure Rate .		Through Hole Resistors
Resistance75 OhmsTolerance±5%Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±300pm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadial LeadSupplier Device Package0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Package	Radial
Tolerance±5%Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±300pm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadial LeadSupplier Device Package0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Series	CPCC
Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±300pm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Resistance	75 Ohms
CompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±300pm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Tolerance	$\pm 5\%$
FeaturesFlame Proof, SafetyTemperature Coefficient±300pm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Power (Watts)	2W
Temperature Coefficient±300ppm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Composition	Wirewound
Operating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Features	Flame Proof, Safety
Package / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Temperature Coefficient	±300ppm/°C
Supplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Operating Temperature	-65°C ~ 275°C
Number of Terminations 0.433" L x 0.276" W (11.00mm x 7.00mm) Height - Seated (Max) 0.807" (20.50mm) Number of Terminations 2 Failure Rate -	Package / Case	Radial
Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Supplier Device Package	Radial Lead
Number of Terminations2Failure Rate-	Size / Dimension	0.433" L x 0.276" W (11.00mm x 7.00mm)
Failure Rate -	Height - Seated (Max)	0.807" (20.50mm)
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

CPCC0275R00JB32 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CPCC0275R00JB32 Payment Methods

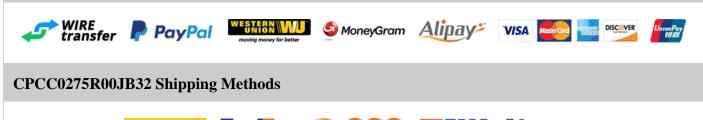



If you have any question about CPCC0275R00JB32, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com