

F-156XP

F-156XP Information

Heisener.com	 F-156XP Triad Magnetics Transformers Power Transformers PC MOUNT POWER TRANSFORMER - For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



F-156XP Specifications

ManufacturerTriad MagneticsCategoryTransformersPower TransformersPower TransformersPackage-Series-TypeLaminated CoreVoltage - PrimaryI15VVoltage - Secondary (Full Load)Parallel 58V, Series 116VCurrent - Output (Max)Parallel 130mA, Series 85mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension1.42mm Lx 37.29mm WHeight - Seated (Max)4.128mmVoltage - Isolation1500VrmsWeight0.657 Ib (298.01g)		
CategoryTransformersPower TransformersPackagePackageSeriesTypeLaminated CoreVoltage - PrimaryVoltage - Secondary (Full Load)Parallel 58V, Series 116VCurrent - Output (Max)Parallel 130mA, Series 85mAPrimary Winding(s)Secondary Winding(s)DualCenter TapPower - MaxPower - MaxMounting TypeSize / DimensionSize / DimensionHeight - Seated (Max)Voltage - IsolationWeightWeightWeightKe	Manufacturer Part Number	F-156XP
InterfactPower TransformersPackage-Series-TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 58V, Series 116VCurrent - Output (Max)Parallel 130mA, Series 85mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max7.5 VAMounting TypeThrough HoleSize / Dimension71.42mm Lx 37.29mm WHeight - Seated (Max)1500VrmsWeight0.657 Ib (298.01g)	Manufacturer	Triad Magnetics
Package - Series - Type Laminated Core Voltage - Primary 115V Voltage - Secondary (Full Load) Parallel 58V, Series 116V Current - Output (Max) Parallel 130mA, Series 85mA Primary Winding(s) Single Secondary Winding(s) Dual Center Tap No Power - Max 7.5 VA Mounting Type Prinage Hole Size / Dimension 71.42mm Lx 37.29mm W Height - Seated (Max) 41.28mm Voltage - Isolation 500Vrms	Category	Transformers
Series-TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 58V, Series 116VCurrent - Output (Max)Parallel 130mA, Series 85mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension71.42mm Lx 37.29mm WHeight - Seated (Max)1500VrmsWoitge - Isolation5.5 Vh (298.01g)		Power Transformers
TypeLaminated CoreYoltage - Primary115VVoltage - Secondary (Full Load)Parallel 58V, Series 116VCurrent - Output (Max)Parallel 130mA, Series 85mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension7.142mm L x 37.29mm WHeight - Seated (Max)1500VrmsWeight0.6571 b (298.01g)	Package	-
Yoltage - Primary115VVoltage - Secondary (Full Load)Parallel 58V, Series 116VCurrent - Output (Max)Parallel 130mA, Series 85mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension11.2 mm L x 37.29mm WHeight - Seated (Max)1500VrmsWoitge - Isolation0.657 Ib (298.01g)	Series	-
Voltage - Secondary (Full Load)Parallel 58V, Series 116VCurrent - Output (Max)Parallel 130mA, Series 85mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension71.42mm L x 37.29mm WHeight - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 1b (298.01g)	Туре	Laminated Core
Current - Output (Max)Parallel 130mA, Series 85mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension71.42mm L x 37.29mm WHeight - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 lb (298.01g)	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension71.42mm L x 37.29mm WHeight - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 1b (298.01g)	Voltage - Secondary (Full Load)	Parallel 58V, Series 116V
Secondary Winding(s)DualCenter TapNoPower - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension71.42mm L x 37.29mm WHeight - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 1b (298.01g)	Current - Output (Max)	Parallel 130mA, Series 85mA
Center TapNoPower - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension71.42mm L x 37.29mm WHeight - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 lb (298.01g)	Primary Winding(s)	Single
Power - Max7.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension71.42mm L x 37.29mm WHeight - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 lb (298.01g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension71.42mm L x 37.29mm WHeight - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 lb (298.01g)	Center Tap	No
Termination StylePC PinSize / Dimension71.42mm L x 37.29mm WHeight - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 lb (298.01g)	Power - Max	7.5 VA
Size / Dimension71.42mm L x 37.29mm WHeight - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 lb (298.01g)	Mounting Type	Through Hole
Height - Seated (Max)41.28mmVoltage - Isolation1500VrmsWeight0.657 lb (298.01g)	Termination Style	PC Pin
Voltage - Isolation1500VrmsWeight0.657 lb (298.01g)	Size / Dimension	71.42mm L x 37.29mm W
Weight 0.657 lb (298.01g)	Height - Seated (Max)	41.28mm
-	Voltage - Isolation	1500Vrms
Report errors?	Weight	0.657 lb (298.01g)
		Report errors?

F-156XP Guarantees

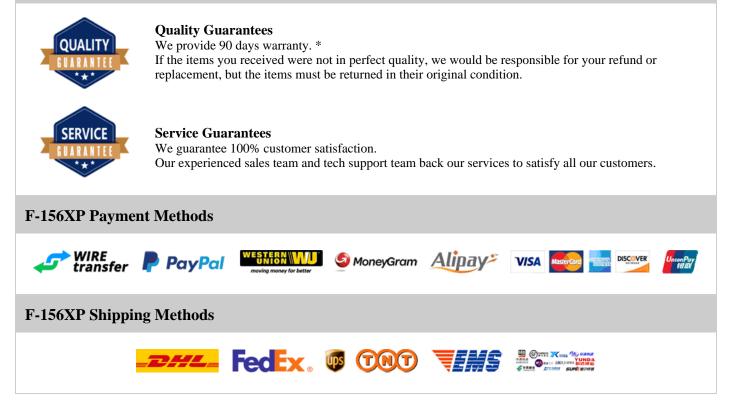

If you have any question about F-156XP, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com