

FI-J40S-VF15N-R3000

FI-J40S-VF15N-R3000 Information

Heisener.com		FI-J40S-VF15N-R3000 JAE Electronics Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN RCPT 0.4MM 40POS VERT SMD	
For Reference Only	-	For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FI-J40S-VF15N-R3000 Specifications

Manufacturer Part NumberFI-J40S-VF15N-R3000ManufacturerJAE ElectronicsCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFI-JConnector TypeReceptacleContact TypeNon-GenderedNumber of Positions Loaded40Number of Positions LoadedAllPich - Mating0.016" (0.40mm)Number of Rows1Number of Rows0.016" (0.40mm)Row Spacing - MatingSolderFortiant TypeSurface MountFortiant TypeSolderRow Spacing - MatingSolderContact Finish - MatingSolderFortiant TypeSolderFundation ColorSolderFundation ColorSolderFundation Finish - MatingSolderFundation ColorBackInsulation ColorBackInsulation Finish - Mating0.046" (1.16mm)Contact Length - Post-Contact Length - Post		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFI-JConnector TypeReceptacleConnector TypeReceptacleContact TypeSoard ocaleredStyleBoard to Cable/WireNumber of Positions40Number of Positions LoadedInformationNumber of Rows0.016"(0.40mm)Number of Rows1Number of Rows0.016"(0.40mm)Number of Rows0.016"(0.40mm)Number of Rows1Strate Mounting TypeSolderForminationSolderFortion LockSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBackInsulation Finish - MatingInsulationInsulation Finish - MatingSolderContact Finish Thickness - MatingSolderInsulation Finish - MatingGoldContact Finish - MatingInsulationInsulation Finish - MatingInsulationContact Finish Thickness - MatingSolderInsulation Finish - MatingInsulationContact Finish - MatingInsulationInsulation Finish -	Manufacturer Part Number	FI-J40S-VF15N-R3000
Package-SeriesFI-JConnector TypeReceptacleContact TypeReceptacleStyleBoard to Cable/WireNumber of Positions40Number of Positions LoadedAllPitch - Mating0.016" (0.40mm)Number of Rows1Row Spacing - MatingSurface MountMounting TypeSurface MountFreminationGoldFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Manufacturer	JAE Electronics
Package-SeriesFI-JConnector TypeReceptacleContact TypeNon-GenderedStyleBoard to Cable/WireNumber of Positions40Number of Positions LoadedAllPitch - Mating0.016° (0.40mm)Number of Rows1Row Spacing - MatingSurface MountMounting TypeSurface MountFartning TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046° (1.16mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesFI-JConnector TypeReceptacleContact TypeNon-GenderedStyleBoard to Cable/WireNumber of Positions40Number of Positions LoadedAllPitch - Mating0.016" (0.40mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorJapin (0.10µm)Insulation ColorBackInsulation Height0.046" (1.16mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeNon-GenderedStyleBoard to Cable/WireNumber of Positions40Number of Positions LoadedAllPitch - Mating0.016" (0.40mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - Mating3.piin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Package	-
Contact TypeNon-GenderedStyleBoard to Cable/WireNumber of Positions40Number of Positions LoadedAllPitch - Mating0.016" (0.40mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFreminationSolderFastening TypeFriction LockContact Finish - MatingGoldIonater Finish - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Series	FI-J
StyleBoard to Cable/WireNumber of Positions40Number of Positions LoadedAllPitch - Mating0.016" (0.40mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions40Number of Positions LoadedAllPitch - Mating0.016" (0.40mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Contact Type	Non-Gendered
Number of Positions LoadedAllPitch - Mating0.016" (0.40mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Style	Board to Cable/Wire
Pitch - Mating0.016" (0.40mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - MatingSolyin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Number of Positions	40
Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Pitch - Mating	0.016" (0.40mm)
Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Number of Rows	1
TerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Row Spacing - Mating	-
Fastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Fastening Type	Friction Lock
Insulation ColorBlackInsulation Height0.046" (1.16mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.046" (1.16mm)Contact Length - Post-	Contact Finish Thickness - Mating	3.9µin (0.10µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.046" (1.16mm)
Operating Temperature $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$	Contact Length - Post	-
	Operating Temperature	-40°C ~ 85°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Gold
Mated Stacking Heights	1.58mm
Ingress Protection	-
Features	Pick and Place, Solder Retention

Report errors?

FI-J40S-VF15N-R3000 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FI-J40S-VF15N-R3000 Payment Methods

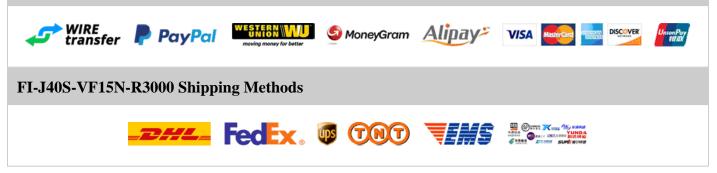

If you have any question about FI-J40S-VF15N-R3000, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com