


#### G6EK-134P-ST-US-DC24 Information



# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.

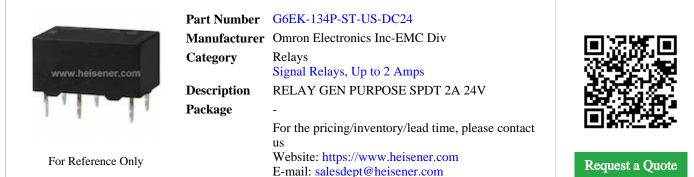

## G6EK-134P-ST-US-DC24 Specifications

Manufacturer Part Number G6EK-134P-ST-US-DC24   Manufacturer Omron Electronics Inc-EMC Div   Category Relays   Category Signal Relays, Up to 2 Amps   Package -   Series G6E   Relay Type General Purpose   Coil Type Latching, Dual Coil   Coil Current 8.3mA   Coil Voltage 24VDC   Contact Form SPDT (1 Form C)   Contact Rating (Current) 2A   Switching Voltage SoVAC, 220VDC - Max   Turn On Voltage (Max) I6.8 VDC   Furner Off Voltage (Min) -   Operate Time Sms   Release Time Sms   Features Sealed - Fully   Mounting Type Through Hole		
CategoryRelaysCategoryRelays, Up to 2 AmpsPackage-Package-SeriesG6ERelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current8.3mACoil Voltage24VDCContact FormSPDT (1 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Chease TimeSmsRelease TimeSealed - FullyHounting TypeThrough HoleFernination StylePC Pin	Manufacturer Part Number	G6EK-134P-ST-US-DC24
NumberSignal Relays, Up to 2 AmpsPackage-SeriesG6ERelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current8.3mACoil Voltage24VDCContact FormSPDT (1 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCCurrentSmsRelease TimeSmsFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Manufacturer	Omron Electronics Inc-EMC Div
Package-SeriesG6ERelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current8.3mACoil Voltage24VDCContact FormSPDT (1 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate TimeSmsRelease TimeSmallFeaturesSealed - FullyMounting TypePC Pin	Category	Relays
SeriesG6ERelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil TypeSamACoil Current8.3mACoil Voltage24VDCContact FormSPDT (1 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate TimeSmsRelease TimeSinsFeaturesSealed - FullyMounting TypePC Pin		Signal Relays, Up to 2 Amps
Relay TypeGeneral PurposeRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Type8.3mACoil Ourrent8.3mACoil Voltage24VDCContact FormSPDT (1 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate TimeSmsRelease TimeSmsFeaturesSealed - FullyMounting TypePC Pin	Package	-
Coil TypeLatching, Dual CoilCoil Current8.3mACoil Voltage24VDCContact FormSPDT (1 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time5msRelease TimeSaidel - FullyFeaturesSnalel - FullyMounting TypePC Pin	Series	G6E
Coil Current8.3mACoil Voltage24VDCContact FormSPDT (1 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time5msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Relay Type	General Purpose
Coil Voltage24VDCContact FormSPDT (1 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time5msRelease TimeSaled - FullyFeaturesSaled - FullyMounting TypeThrough HoleFernination StylePC Pin	Coil Type	Latching, Dual Coil
Contact FormSPDT (1 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time5msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleFernination StylePC Pin	Coil Current	8.3mA
Contact Rating (Current)2ASwitching Voltage50VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time5msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Coil Voltage	24VDC
Switching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time5msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Contact Form	SPDT (1 Form C)
Turn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time5msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	2A
Turn Off Voltage (Min)-Operate Time5msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	250VAC, 220VDC - Max
Operate Time5msRelease Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	16.8 VDC
Release Time5msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	-
FeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Operate Time	5ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	5ms
Termination Style PC Pin	Features	Sealed - Fully
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

#### G6EK-134P-ST-US-DC24 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### G6EK-134P-ST-US-DC24 Payment Methods





If you have any question about G6EK-134P-ST-US-DC24, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com