

# **JKS-70**

## **JKS-70 Information**



| Part Number  | JKS-70   |  |
|--------------|--|--|
| Manufacturer | Eaton  |  |
| Category     | Circuit Protection<br>Electrical, Specialty Fuses  |  |
| Description  | FUSE CYLINDRICAL   |  |
| Package      | Cylindrical, Blade Terminal (Bolt)   |  |
|              | For the pricing/inventory/lead time, please contact<br>us<br>Website: https://www.heisener.com<br>E-mail: salesdept@heisener.com |  |



Request a Quote

For Reference Only

### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



#### **JKS-70 Specifications**

| ManufacturerEatonCategoryCircuit ProtectionBeckrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JKSFuser TypeCatridgeCurrent Rating70AVoltage Rating - AC60VVoltage Rating - DCFastApplicationsElectrical, IndustrialFuserSeriesApprovalsCECSA, ULOperating Temperature00KAPackage/ CaseSolt MountPackage / CaseSolt MountPackage / CaseSolt MountPackage / CaseSolt MountSize / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)   |                                   |   |
|---|-----------------------------------|---|
| CategoryCircuit ProtectionBeckageElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JKSFuse TypeCatridgeCurrent Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFastures-ClassJApprovalsCE, CSA, ULOperating TemperatureSolokAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Manufacturer Part Number          | JKS-70                                    |
| Current RatingElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JKSFuse TypeCartridgeCurrent Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)   | Manufacturer                      | Eaton                                     |
| PackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JKSFuse TypeCartridgeCurrent Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Type-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)   | Category                          | Circuit Protection                        |
| SeriesLimitron? JKSFuse TypeCartridgeCurrent Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / Case1.130" Dia x 2.630" L (28.70mm x 66.80mm)   |                                   | Electrical, Specialty Fuses               |
| FunctionEntropy of the second sec | Package                           | Cylindrical, Blade Terminal (Bolt)        |
| Current Rating70ACurrent Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Series                            | Limitron? JKS                             |
| Voltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)   | Fuse Type                         | Cartridge                                 |
| Voltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Current Rating                    | 70A                                       |
| Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Voltage Rating - AC               | 600V                                      |
| ApplicationsElectrical, IndustrialApplications-Features-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Voltage Rating - DC               | -   |
| InInFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)   | Response Time                     | Fast                                      |
| ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Applications                      | Electrical, Industrial                    |
| ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Features                          | -   |
| Operating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Class                             | J   |
| Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Approvals                         | CE, CSA, UL                               |
| Mounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Operating Temperature             | -   |
| Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.130" Dia x 2.630" L (28.70mm x 66.80mm)   | Breaking Capacity @ Rated Voltage | 200kA                                     |
| Size / Dimension 1.130" Dia x 2.630" L (28.70mm x 66.80mm)  | Mounting Type                     | Bolt Mount                                |
|   | Package / Case                    | Cylindrical, Blade Terminal (Bolt)        |
| Report errors?  | Size / Dimension                  | 1.130" Dia x 2.630" L (28.70mm x 66.80mm) |
|   |                                   | Report errors?                            |

#### **JKS-70 Guarantees**

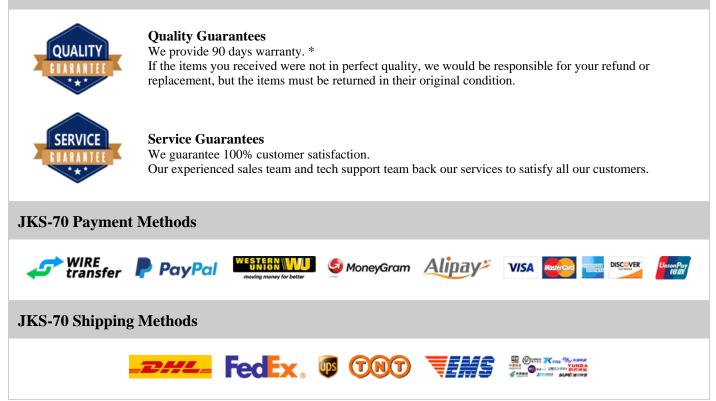

If you have any question about JKS-70, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com