


L717HDDG78POL2RM8C309

L717HDDG78POL2RM8C309 Information

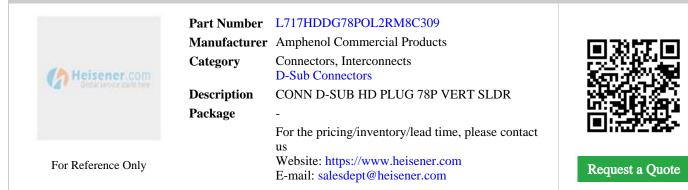

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



L717HDDG78POL2RM8C309 Specifications

Manufacturer Amphenol Commercial Products Connectors, Interconnects D-Sub Connectors Package - Package - Series HD Connector Style D-Sub Charles Connector Style Pulg, Male Pins Connector Style 9 Vumber of Positions 78 Shell Size, Connector Layout 5 (DD, D) High Density Contact Type 5 (DD, D) High Density Contact Type Signal Mounting Type Through Hole Flarupe Feature Board Side (M3); Mating Side, Female Screwlock (M3) Features Board Lock, Grounding Indents Shell Material, Finish Stel, Tin Plated Contact Finish Thickness Gold Contact Finish Thickness Signi (0.76µm) Contact Finish Thickness Signi (0.76µm)		
CategoryConnectors, InterconnectsD-Sub ConnectorsPackage-SeriesHDConnector StyleD-Sub, High DensityConnector TypePlug, Male PinsNumber of Positions78Shell Size, Connector Layout5 (DD, D) High DensityContact TypeSignalMounting TypeThrough HoleFlange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FeaturesBoard Lock, Grounding IndentsShell Material, FinishStell, Tin PlatedContact Finish Thickness30µin (0.76µm)Contact Finish ThicknessUL94 V-0	Manufacturer Part Number	L717HDDG78POL2RM8C309
PackageD-Sub ConnectorsPackage-SeriesHDConnector StyleD-Sub, High DensityConnector TypePlug, Male PinsNumber of Positions78Number of Rows4Shell Size, Connector Layout5 (DD, D) High DensityContact TypeSignalMuunting TypeThrough HoleFlange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FeaturesSolderShell Material, FinishSteel, Tin PlatedContact Finish Thickness30µin (0.76µm)Contact Finish ThicknessJUE 4V-0	Manufacturer	Amphenol Commercial Products
Package-SeriesHDConnector StyleD-Sub, High DensityConnector TypePlug, Male PinsNumber of Positions78Number of Rows4Shell Size, Connector Layout5 (DD, D) High DensityContact TypeSignalMunting TypeThrough HoleFlange FeatureBoard Scide (M3); Mating Side, Female Screwlock (M3)FeaturesSolderShell Material, FinishStel, Tin PlatedContact Finish ThicknessGoldContact Finish ThicknessJuin (0.76µm)Material Flammability RatingUL94 V-0	Category	Connectors, Interconnects
AndHDConnector StyleD-Sub, High DensityConnector TypePlug, Male PinsConnector Type78Number of Positions4Shell Size, Connector Layout5 (DD, D) High DensityContact TypeSignalContact TypeBoard Side (M3); Mating Side, Female Screwlock (M3)Flange FeatureBoard Lock, Grounding IndentsFeaturesBoard Lock, Grounding IndentsShell Material, FinishStell, Tin PlatedContact Finish ThicknessGoldContact Finish ThicknessJujin (0.76µm)Material Flammability RatingUL94 V-0		D-Sub Connectors
Connector StyleD-Sub, High DensityConnector TypePlug, Male PinsNumber of Positions78Number of Rows4Shell Size, Connector Layout5 (DD, D) High DensityContact TypeSignalMounting TypeThrough HoleFlange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FeaturesBoard Lock, Grounding IndentsShell Material, FinishStel, Tin PlatedContact Finish ThicknessOldContact Finish ThicknessJupin (0.76µm)Material Flammability RatingUL94 V-0	Package	-
Connector TypePlug, Male PinsNumber of Positions78Number of Rows4Shell Size, Connector Layout5 (DD, D) High DensityContact TypeSignalMounting TypeThrough HoleFlange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Series	HD
Number of Positions78Number of Rows4Shell Size, Connector Layout5 (DD, D) High DensityContact TypeSignalMounting TypeThrough HoleFlange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FerminationSolderFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Connector Style	D-Sub, High Density
Number of Rows4Shell Size, Connector Layout5 (DD, D) High DensityContact TypeSignalMounting TypeThrough HoleFlange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FerminationSolderFeaturesBoard Lock, Grounding IndentsShell Material, FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Connector Type	Plug, Male Pins
Shell Size, Connector Layout5 (DD, D) High DensityContact TypeSignalMounting TypeThrough HoleFlange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FerminationSolderFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessGoldContact Finish ThicknessJupin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Number of Positions	78
Contact TypeSignalMounting TypeThrough HoleFlange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FerminationSolderFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Number of Rows	4
Mounting TypeThrough HoleFlange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FerminationSolderFeaturesBoard Lock, Grounding IndentsFeaturesSteel, Tin PlatedShell Material, FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Shell Size, Connector Layout	5 (DD, D) High Density
Flange FeatureBoard Side (M3); Mating Side, Female Screwlock (M3)FerminationSolderFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Contact Type	Signal
FerminationSolderFeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Mounting Type	Through Hole
FeaturesBoard Lock, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Flange Feature	Board Side (M3); Mating Side, Female Screwlock (M3)
Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Termination	Solder
Contact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Features	Board Lock, Grounding Indents
Contact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Shell Material, Finish	Steel, Tin Plated
Ingress Protection - Material Flammability Rating UL94 V-0	Contact Finish	Gold
Material Flammability Rating UL94 V-0	Contact Finish Thickness	30µin (0.76µm)
	Ingress Protection	-
Perpert among?	Material Flammability Rating	UL94 V-0
Report errors?		Report errors?

L717HDDG78POL2RM8C309 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

L717HDDG78POL2RM8C309 Payment Methods



If you have any question about L717HDDG78POL2RM8C309, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com