


## LDEPH3220KA5N00

#### LDEPH3220KA5N00 Information

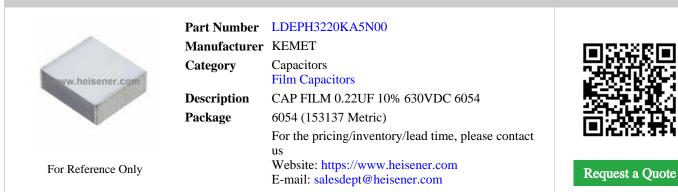

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### LDEPH3220KA5N00 Specifications

Manufacturer Part NumberLDEPH3220KA5N00ManufacturerKEMETCategoryCapacitorsFilm CapacitorsFilm CapacitorsPackage6054 (153137 Metric)SeriesLDECapacitance0.22µFTolerance200VVoltage Rating - AC200VVoltage Rating - DC630VDielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedPortaing Temperature-55°C - 125°CMounting TypeSufface MountSize / Dimension0.610° L x 0.539° W (15.50mm x 13.70mm)Height - Seated (Max)-Actag Spacing-Actag Spacing-Giore and Capacitance-Size / DimensionSolder PadsFerminationSolder PadsLead Spacing-Applications-<			
CategoryCapacitorsFilm CapacitorsPackage6054 (153137 Metric)SeriesLDECapacitance0.22µFTolerance±10%Voltage Rating - AC200VSolerier, Material630VDielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedSR (Equivalent Series Resistance)-Porating Type55°C ~ 125°CMounting TypeSufface MountPackage / Case0.610° L x 0.539° W (15.50mm x 13.70mm)Field Hammann50/der PadsField HammannSolder PadsField Spacing-Lead Spacing-ApplicationsGeneral PurposeFieturesHigh TemperatureStatus Series-Status Series-Status SeriesSolder PadsStatus Series-Status Series-S	Manufacturer Part Number	LDEPH3220KA5N00	
Fin CapacitorsPackage6054 (153137 Metric)SeriesLDECapacitance0.22µFTolerance±10%Voltage Rating - AC200VVoltage Rating - DC630VDielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Manufacturer	KEMET	
Package6054 (15137 Metric)SeriesLDECapacitance0.22µFTolerance±10%Voltage Rating - AC200VVoltage Rating - DC630VDielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedPograting Temperature-55°C ~ 125°CMounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610° L x 0.539° W (15.50mm x 13.70mm)Height - Seated (Max)0.193° (4.90mm)TerminationSolder PadsApplicationsGeneral PurposeFeaturesHigh TemperatureFeaturesHigh Temperature	Category	Capacitors	
SeriesLDECapacitance0.22µFTolerance±10%Voltage Rating - AC200VVoltage Rating - DC630VDielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting Type6054 (153137 Metric)Size / Dimension0.610° L x 0.539° W (15.50mm x 13.70mm)Height - Seated (Max)0.193° (4.90mm)TerminationSolder PadsLead Spacing-FeaturesHigh TemperatureHigh TemperatureSolder PadsLead Spacing-Height Seated (Max)1.91° (4.90mm)Height Seated (Max)Solder PadsLead Spacing-Height Seated (Max)Solder PadsHeight Seated (Max)Solder PadsHeight Seated (Max)Solder PadsLead Spacing-Height SeateriesSolder PadsHeight Seaterie		Film Capacitors	
Capacitance0.22μFTolerance±10%Voltage Rating - AC200VVoltage Rating - DC630VDielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedDielectric Material-Operating Temperature-55°C ~ 125°CMounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.913" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Package	6054 (153137 Metric)	
Tolerance±10%Voltage Rating - AC200VVoltage Rating - DC630VDielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Series	LDE	
Voltage Rating - AC200VVoltage Rating - DC630VDielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Capacitance	0.22µF	
Voltage Rating - DC630VDielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Tolerance	±10%	
Dielectric MaterialPolyester, Polyethylene Naphthalate (PEN), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Voltage Rating - AC	200V	
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 125°CMounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Voltage Rating - DC	630V	
Operating Temperature-55°C ~ 125°CMounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Dielectric Material	Polyester, Polyethylene Naphthalate (PEN), Metallized - Stacked	
Nounting TypeSurface MountPackage / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	ESR (Equivalent Series Resistance)	-	
Package / Case6054 (153137 Metric)Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Operating Temperature	-55°C ~ 125°C	
Size / Dimension0.610" L x 0.539" W (15.50mm x 13.70mm)Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Mounting Type	Surface Mount	
Height - Seated (Max)0.193" (4.90mm)TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Package / Case	6054 (153137 Metric)	
TerminationSolder PadsLead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Size / Dimension	0.610" L x 0.539" W (15.50mm x 13.70mm)	
Lead Spacing-ApplicationsGeneral PurposeFeaturesHigh Temperature	Height - Seated (Max)	0.193" (4.90mm)	
ApplicationsGeneral PurposeFeaturesHigh Temperature	Termination	Solder Pads	
Features High Temperature	Lead Spacing	-	
	Applications	General Purpose	
Papert array	Features	High Temperature	
Report error			Report errors?

#### LDEPH3220KA5N00 Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### LDEPH3220KA5N00 Payment Methods





If you have any question about LDEPH3220KA5N00, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com