


MKP385239200JDA2B0

MKP385239200JDA2B0 Information

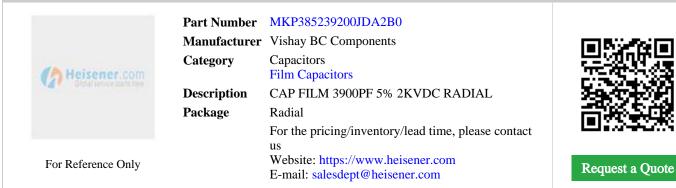

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385239200JDA2B0 Specifications

Manufacturer Vishay BC Components Gapacitors Film Capacitors Package Radial Series MKP385 Capacitors 3000pF Tolerance 3900pF Voltage Rating - AC 700V Voltage Rating - DC 2000V (2kV) Dielectric Material Polypropylene (PP), Metallized Polypropylene (PP), Metallized 55° C ~ 110°C Mounting Type - Package / Case Radial Size / Dimension 0.492° L x 0.236° W (12.50mm x 6.00mm) Height - Seated (Max) 0.492° (12.00mm) Polypications 0.394" (10.00mm) Applications Di.2000m)	_	
CategoryCapacitorsPackageRadialPackageMKP385SeriesMKP385Capacitance3900pFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CPackage / CaseRadialSize / Dimension0.492° L x 0.236° W (12.50mm x 6.00mm)Height - Seated (Max)0.344″ (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer Part Number	MKP385239200JDA2B0
Film CapacitorsPackageRadialSeriesMKP385Capacitance3900pFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PC Pins0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance3900pFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PC Pins0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 3900pF Tolerance ±5% Voltage Rating - AC 700V Voltage Rating - DC 2000V (2kV) Dielectric Material Polypropylene (PP), Metallized ESR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.472" (12.00mm) Height - Seated (Max) 0.472" (10.00mm) Applications 0.394" (10.00mm) Features -		Film Capacitors
Capacitance3900pFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)Applications-Features-	Series	MKP385
Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	3900pF
Voltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedDielectric Material-ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	700V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	2000V (2kV)
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension0.492" L x 0.236" W (12.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.492" L x 0.236" W (12.50mm x 6.00mm)
Lead Spacing0.394" (10.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.472" (12.00mm)
Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Termination	PC Pins
Features -	Lead Spacing	0.394" (10.00mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

MKP385239200JDA2B0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MKP385239200JDA2B0 Payment Methods





If you have any question about MKP385239200JDA2B0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com