


MKP385322085JFM2B0

MKP385322085JFM2B0 Information

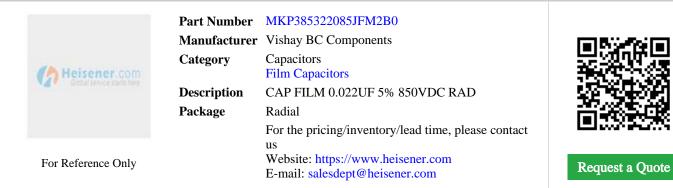

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385322085JFM2B0 Specifications

ManufacturerVishay BC ComponentsCategoryCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance0.022µFVoltage Rating - AC300VVoltage Rating - DC\$50VDielectric MaterialPolyropylene (PP), MetallizedSeries-Operating Temperature-55°C ~ 110°CVoltage / CaseRadialSiz / Dimension0.689° L x 0.197° W(17.50mm x 5.00mm)Height - Seated (Max)0.433° (11.00mm)PerminationPC PinsLead Spacing0.591° (15.00mm)ApplicationsD.51° L ink, DC Filtering; High Frequency, Switching; High Pulse, DV/DT		
Category Capacitors Film Capacitors Film Capacitors Package Radial Series MKP385 Capacitance 0.022µF Tolerance ±5% Voltage Rating - AC 300V Voltage Rating - DC 850V Dielectric Material Polyropylene (PP), Metallized Operating Temperature - Operating Temperature - Package / Case Radial Size / Dimension 0.689° L x 0.197° W (17.50mm x 5.00mm) Height - Seated (Max) 0.591° (15.00mm) Lead Spacing .591° (15.00mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Manufacturer Part Number	MKP385322085JFM2B0
Film CapacitorsPackageRadialSeriesMKP385Capacitance0.022µFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689° L x 0.197° W (17.50mm x 5.00mm)Height - Seated (Max)0.433° (11.00mm)Per PinsDc Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance0.022µFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689° L x 0.197° W (17.50mm x 5.00mm)Height - Seated (Max)0.433° (11.00mm)TerminationC PrinsApplications0.591° I (5.00mm)ApplicationsD C Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 0.022µF Tolerance ±5% Voltage Rating - AC 300V Voltage Rating - DC 850V Dielectric Material Polypropylene (PP), Metallized Dielectric Material - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.689" L x 0.197" W (17.50mm x 5.00mm) Height - Seated (Max) 0.433" (11.00mm) Termination CP Pins Lead Spacing 0.591" (15.00mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance0.022µFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)Applications-Features-	Series	MKP385
Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.022µF
Voltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	300V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	850V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.689" L x 0.197" W (17.50mm x 5.00mm)
Lead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.433" (11.00mm)
Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Termination	PC Pins
Features -	Lead Spacing	0.591" (15.00mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

MKP385322085JFM2B0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

S MoneyGram Alipay VISA

DISCOVER

MKP385322085JFM2B0 Payment Methods



MKP385322085JFM2B0 Shipping Methods



If you have any question about MKP385322085JFM2B0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com

VESTERN

 \mathbf{M}