


RTX3-1AT-B006

RTX3-1AT-B006 Information

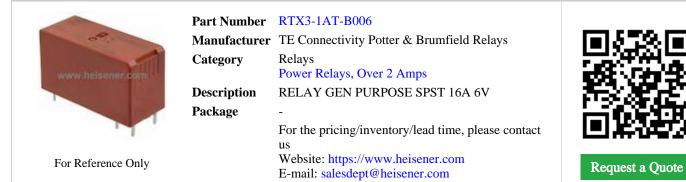

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



RTX3-1AT-B006 Specifications

Manufacturer Part NumberRTX3-1AT-B006ManufacturerTE Connectivity Potter & Brumfield RelaysCategoryRelaysCategoryPower Relays, Over 2 AmpsPackage-SeriesRTX, SCHRACKRelay TypeGeneral PurposeCoil TypeLatching, Single CoilCoil Current108.3mACoil Voltage6VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage (Max)4.5 VDCTurn On Voltage (Max)4.5 VDCCurrent Fine-Coperate Time-Release Time-FeaturesInsulation - Class FMonting TypeProveContarting TypeProve Market		
CategoryRelaysPower Relays, Over 2 AmpsPackagePackageSeriesRTX, SCHRACKRelay TypeGeneral PurposeCoil TypeLatching, Single CoilCoil Current108.3mACoil Voltage6VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage (Max)4.5 VDCTurn On Voltage (Max)4.5 VDCCurrent Firme50VAC - NomRelease Time-FeaturesInsulation - Class FMounting TypePC Pin	Manufacturer Part Number	RTX3-1AT-B006
PackagePower Relays, Over 2 AmpsPackage-SeriesRTX, SCHRACKRelay TypeGeneral PurposeCoil TypeLatching, Single CoilCoil Current108.3mACoil Voltage6VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage250VAC - NomTurn On Voltage (Max)4.5 VDCCurrent Fine-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypePC Pin	Manufacturer	TE Connectivity Potter & Brumfield Relays
Package-SeriesRTX, SCHRACKRelay TypeGeneral PurposeCoil TypeLatching, Single CoilCoil Current108.3mACoil Voltage6VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage250VAC - NomTurn On Voltage (Max)-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypeCP in	Category	Relays
SeriesRTX, SCHRACKRelay TypeGeneral PurposeCoil TypeLatching, Single CoilCoil Type108.3mACoil Voltage6VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage250VAC - NomTurn On Voltage (Man)-Operate Time-Relase Time-FeaturesInsulation - Class FMounting TypeCP inTermination StyleCP in		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeLatching, Single CoilCoil Orrent108.3mACoil Voltage6VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage250VAC - NomTurn On Voltage (Max)4.5 VDCOperate Time-Release Time-FeaturesInsultion - Class FMounting TypePC PinTermination StylePC Pin	Package	-
Coil TypeLatching, Single CoilCoil Current108.3mACoil Voltage6VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage250VAC - NomTurn On Voltage (Max)4.5 VDCTurn Off Voltage (Min)-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypePC Pin	Series	RTX, SCHRACK
Coil Current108.3mACoil Voltage6VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage250VAC - NomTurn On Voltage (Max)4.5 VDCTurn Off Voltage (Min)-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypePC Pin	Relay Type	General Purpose
Coil Voltage6VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage250VAC - NomTurn On Voltage (Max)4.5 VDCTurn Off Voltage (Min)-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypePC PinFernination StylePC Pin	Coil Type	Latching, Single Coil
Contact FormSPST-NO (1 Form A)Contact Rating (Current)16ASwitching Voltage250VAC - NomTurn On Voltage (Max)4.5 VDCTurn Off Voltage (Min)-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypeFor PinPremination StylePC Pin	Coil Current	108.3mA
Contact Rating (Current)16ASwitching Voltage250VAC - NomTurn On Voltage (Max)4.5 VDCTurn Off Voltage (Min)-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypeThrough HoleTermination StylePC Pin	Coil Voltage	6VDC
Switching Voltage250VAC - NomTurn On Voltage (Max)4.5 VDCTurn Off Voltage (Min)-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypeThrough HoleTermination StylePC Pin	Contact Form	SPST-NO (1 Form A)
Turn On Voltage (Max)4.5 VDCTurn Off Voltage (Min)-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypeThrough HoleTermination StylePC Pin	Contact Rating (Current)	16A
Turn Off Voltage (Min)-Operate Time-Release Time-FeaturesInsulation - Class FMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	250VAC - Nom
Operate Time-Release Time-FeaturesInsulation - Class FMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	4.5 VDC
Release Time-FeaturesInsulation - Class FMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	-
FeaturesInsulation - Class FMounting TypeThrough HoleTermination StylePC Pin	Operate Time	-
Mounting Type Through Hole Termination Style PC Pin	Release Time	-
Termination Style PC Pin	Features	Insulation - Class F
· ·	Mounting Type	Through Hole
Dependent entropy	Termination Style	PC Pin
Report errors?		Report errors?

RTX3-1AT-B006 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

RTX3-1AT-B006 Payment Methods



RTX3-1AT-B006 Shipping Methods



If you have any question about RTX3-1AT-B006, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com