


SA101A821JAR

SA101A821JAR Information

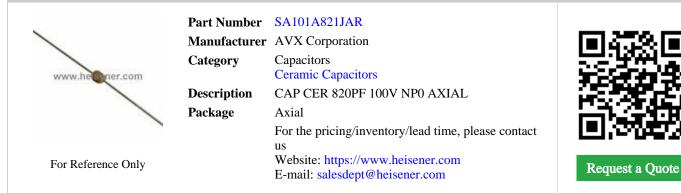

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SA101A821JAR Specifications

Manufacturer Part Number SA101A821JAR Manufacturer AVX Corporation Category Capacitors Catadage Caranic Capacitors Package Axial Series SpinGuard? SA Capacitance SupF Tolerance 5% Voltage - Rated 100V Operating Temperature CoG, NPO Operating Temperature - Applications Socie - 225°C Ratings - Applications General Purpose Applications General Purpose Applications General Purpose Package / Case Axial Size / Dimension 100°D in a v.170° L (2.54mm x 4.32mm) Height - Seated (Max) - Fickness (Max) - Lead Spacing - Lead Spacing - Lead Spacing -		
CategoryCaranic CapacitorsPackageAxialSeriesAxialCapacitanceSinGuard? SACapacitance820pFTolerance5%Voltage - Rated100VTomperature CoefficientCOG, NPOOperating Temperature-55° C ~ 125°CFeatures-55° C ~ 125°CFatings-6ApplicationsGeneral PurposeFailure Rate-Mounting Type-1Package / CaseAxialSize / Dimension0.100° Dia x 0.170° L (2.54mm x 4.32mm)Fickets (Max)-Height - Seated (Max)-Fickets (Max)-Lead Spacing-Lead Spacing-Lead Style-Lead Style-	Manufacturer Part Number	SA101A821JAR
Indext and the second	Manufacturer	AVX Corporation
PackageAxialSeriesSpinGuard? SACapacitance820pFTolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHrough HolePackage / Case0.100° Dia x 0.170° L (2.54mm x 4.32mm)Height - Seated (Max)-Hickness (Max)-Lead Spacing-Lead Style-Lead Style-	Category	Capacitors
SeriesSpinGuard? SACapacitance820pFTolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.100° Dia x 0.170° L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style-Style		Ceramic Capacitors
Capacitance 820pF Tolerance ±5% Voltage - Rated 100V Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Features - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.100" Dia x 0.170" L (2.54mm x 4.32mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing - Lead Style -	Package	Axial
Tolerance±%Voltage - Rated100VTemperature CoefficientC0G, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100° Dia x 0.170° L (2.54mm x 4.32mm)Height - Seated (Max)-Lead Spacing-Lead Style-Lead Style-	Series	SpinGuard? SA
Voltage - Rated100VTemperature CoefficientC0G, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100° Dia x 0.170° L (2.54mm x 4.32mm)Height - Seated (Max)-Lead Spacing-Lead Spacing-Lead Style-Star (Style-Star (Style-<	Capacitance	820pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100° Dia x 0.170° L (2.54mm x 4.32mm)Height - Seated (Max)-Faickness (Max)-Lead Spacing0.300° Dia Control Co	Tolerance	±5%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" Dia X 0.170" L (2.54mm x 4.32mm)Lead Style-	Voltage - Rated	100V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6.Lead Style-	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100Lead Style-	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-Output-Style-	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Ratings	-
Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Applications	General Purpose
Package / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Failure Rate	-
Size / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Mounting Type	Through Hole
Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Package / Case	Axial
Thickness (Max)-Lead Spacing-Lead Style-	Size / Dimension	0.100" Dia x 0.170" L (2.54mm x 4.32mm)
Lead Spacing-Lead Style-	Height - Seated (Max)	-
Lead Style -	Thickness (Max)	-
	Lead Spacing	-
Report errors?	Lead Style	-
		Report errors?

SA101A821JAR Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SA101A821JAR Payment Methods



SA101A821JAR Shipping Methods



If you have any question about SA101A821JAR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com