


WKP330MCPDF0KR

WKP330MCPDF0KR Information

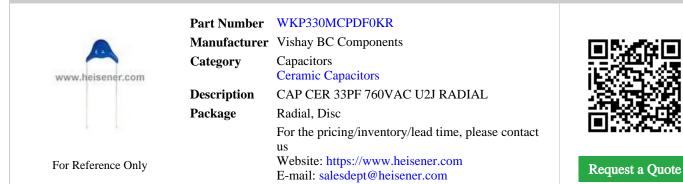

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



WKP330MCPDF0KR Specifications

Manufacturer Part Number WKP330MCPDF0KR Manufacturer Vishay BC Components Category Capacitors Category Ceramic Capacitors Package Radial, Disc Series WKP Capacitance 33pF Tolerance ±20% Voltage - Rated 760VAC Operating Temperature Coefficient U2J Operating Temperature - Pacitanos X1, Y1 Applications Safety Failure Rate - Mounting Type Through Hole Package / Case Radial, Disc Size / Dimension 0.315" Dia (8.00mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing Marital, Disc		
CategoryCapacitorsPackageRadial, DiscPackageRadial, DiscSeriesWKPCapacitance33pFTolerance±20%Voltage - Rated760VACTomperature CoefficientU2JOperating Temperature-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStriaght	Manufacturer Part Number	WKP330MCPDF0KR
Indext Ceramic CapacitorsPackageRadial, DiscSeriesWKPCapacitance33pFTolerance±20%Voltage - Rated760VACTemperature CoefficientU2JOperating Temperature-Peatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeSafetyPackage / CaseRadia, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Manufacturer	Vishay BC Components
PackageRadial, DiscSeriesWKPCapacitance33pFTolerance±20%Voltage - Rated760VACTemperature CoefficientU2JOperating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeNongh HolePackage / CaseRadia, DiscSize / Dimension0.315° Dia (8.00mn)Height - Seated (Max)-Thickness (Max)-Lead SpacingMangh CaseLead StyleStraightLead StyleStraight	Category	Capacitors
SeriesWKPCapacitance33pFTolerance±20%Voltage - Rated760VACTemperature CoefficientU2JOperating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HoleSize / Dimension0.315° Dia (8.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492° (12.50mm)Lead StyleStraight		Ceramic Capacitors
Capacitance33pFTolerance±20%Voltage - Rated760VACTemperature CoefficientU2JOperating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeHoleSize / Dimension0.315° Dia (8.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492° (12.50mm)Lead StyleStraight	Package	Radial, Disc
Tolerance±20%Voltage - Rated760VACTemperature CoefficientU2JOperating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.433" (11.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6.492" (12.50mm)Lead StyleStraight	Series	WKP
Voltage - Rated760VACTemperature CoefficientU2JOperating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.433° (11.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492° (12.50mm)Lead StyleStraight	Capacitance	33pF
Temperature CoefficientU2JOperating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Tolerance	±20%
Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStringht	Voltage - Rated	760VAC
Features-Features-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.433" (11.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Temperature Coefficient	U2J
RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.433" (11.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Operating Temperature	-40°C ~ 125°C
ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.433" (11.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.433" (11.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Ratings	X1, Y1
Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.433" (11.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Applications	Safety
Package / CaseRadial, DiscSize / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.433" (11.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.315" Dia (8.00mm) Height - Seated (Max) 0.433" (11.00mm) Thickness (Max) - Lead Spacing 0.492" (12.50mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.433" (11.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Package / Case	Radial, Disc
Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Size / Dimension	0.315" Dia (8.00mm)
Lead Spacing0.492" (12.50mm)Lead StyleStraight	Height - Seated (Max)	0.433" (11.00mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.492" (12.50mm)
Report errors?	Lead Style	Straight
		Report errors?

WKP330MCPDF0KR Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

WKP330MCPDF0KR Payment Methods



If you have any question about WKP330MCPDF0KR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com