




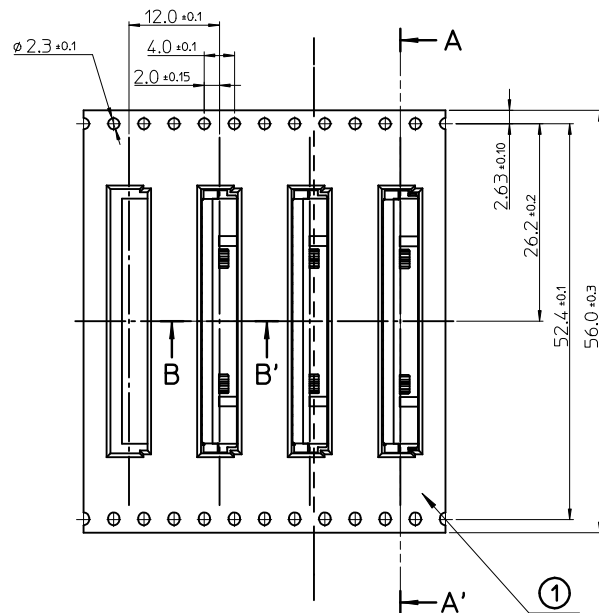


PULL OUT DIRECTION




PULL OUT DIRECTION



PLASTIC BOBBIN

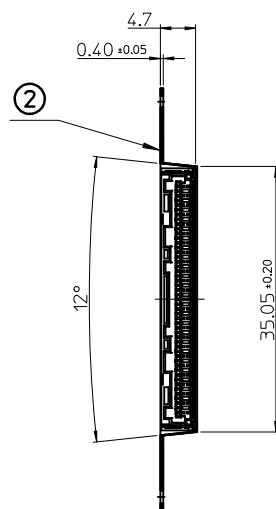


SECTION A-A'

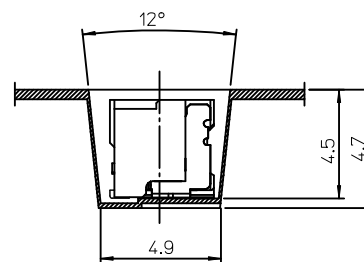


SECTION B-B'
SCALE 3/1

- NOTES.
1. QUANTITY OF CONNECTORS : 1,500 PCS/REEL
 2. LEAD LENGTH

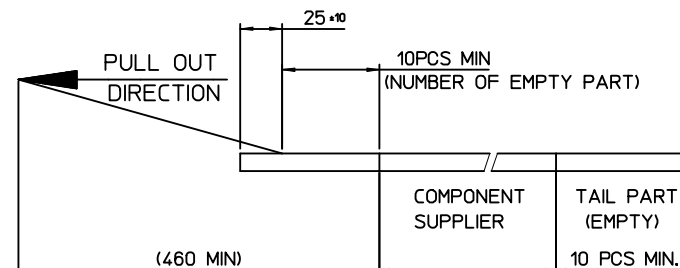

3. PEELING OFF FORCE OF COVER TAPE : 0.1N~0.59N(10.2GF~60GF)
(PEELING DIRECTION AS SHOW IN FOLLOW FIG.)
PEELING OFF SPEED : 300mm/Min.(Ref.)



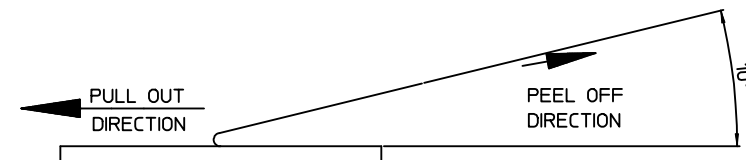


4. FLASH IN ANY PORTION SHOULD BE LESS THAN 0.20mm MAX.
5. UNLESS OTHERWISE SPECIFIED INNER R 0.2MAX
6. DRAFT ANGLE 3° MAX




3	PLASTIC BOBBIN	HI P.S	WHITE
2	COVER TAPE	PET ANTISTATIC	49.0 mm
1	CARRIER (EMBOSSD) TAPE	PET ANTISTATIC	104091-9905
NO	DESCRIPTION	MATERIAL	REMARK

ORDER NO 104091-2520

RELEASED		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: KOR2012-0127		DRWN:SKCH0		CHECKED BY		DATE		1/1		METRIC		1/1	
2012/07/09		2012/07/09		2011/08/02		2011/08/02		2011/08/02		2011/08/02		2011/08/02	
CH'KD:SHCHU		APPR:YSKIM02		2012/08/06		2012/08/06		2012/08/06		2012/08/06		2012/08/06	
REV		DESCRIPTION		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		1 OF 1		1 OF 1	
A		1		1040912520		SD-104091-012		1040912520		SD-104091-012		1040912520	
A		1		1040912520		SD-104091-012		1040912520		SD-104091-012		1040912520	
A		1		1040912520		SD-104091-012		1040912520		SD-104091-012		1040912520	

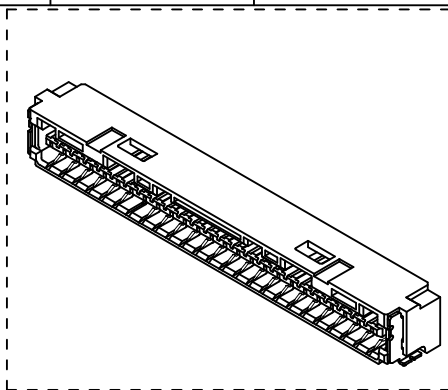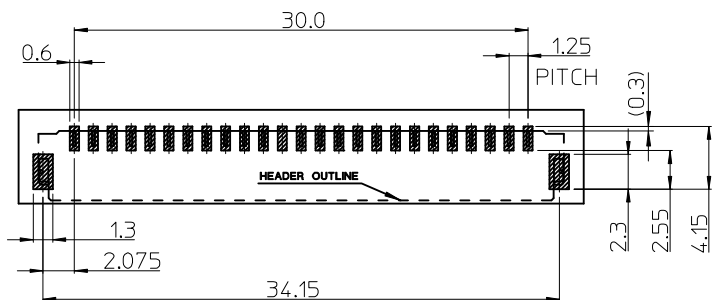
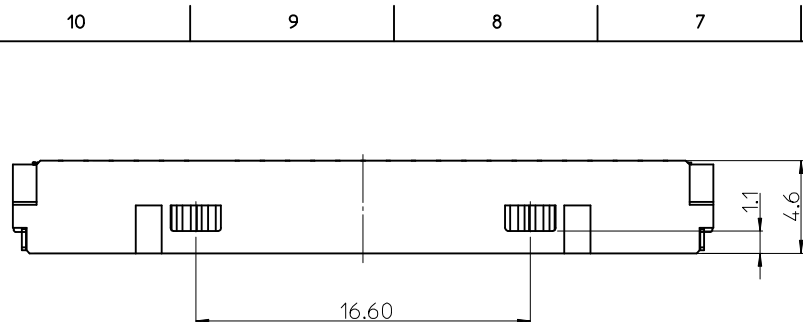


RECOMMEND RATTEN [REF.]
[PCB GENERAL TOLERANCE ± 0.05]

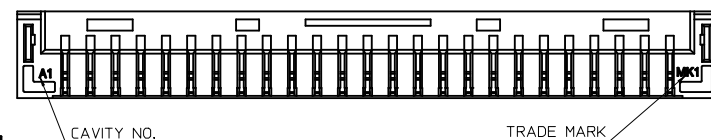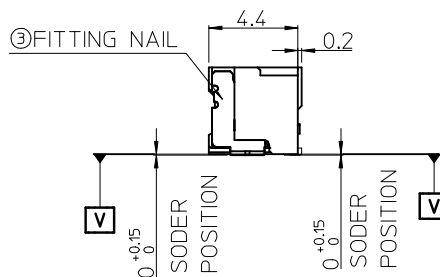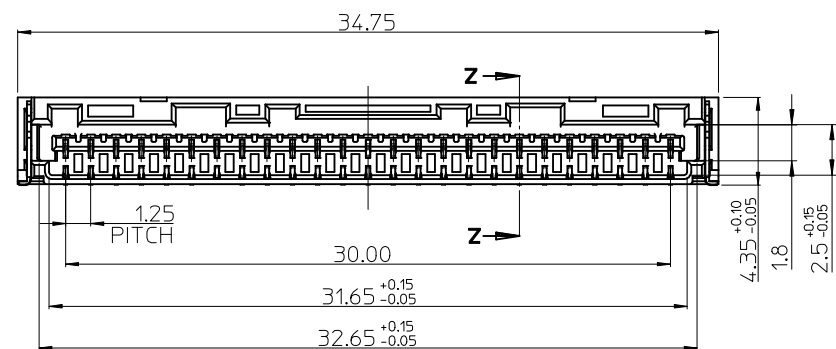

NOTES.

- MATERIALS
 - HEADER : LIQUID CRYSTAL POLYMER(LCP), GLASS FILLED, UL94V-0, COLOR: NATURAL (IVORY)
 - CONTACT TERMINAL : PHOSPHOR BRONZE
 - FITTING NAIL : PHOSPHOR BRONZE
- FINISHES
 - CONTACT TERMINAL : PURE TIN PLATING ON OVERALL
THICKNESS : 3.0~5.0 μ m
UNDER PLATING Ni OVERALL
THICKNESS 1.25~3.75 μ m
 - FITTING NAIL : PURE TIN PLATING ON OVERALL.
THICKNESS 3.0 ~ 5.0 μ m
UNDER PLATING Ni OVERALL
THICKNESS 1.25 ~ 3.75 μ m
- PRODUCT SPECIFICATION : PS-104091-001
- PACKAGING SPECIFICATION : PK-104091-001
- MATED WITH : 104092-2500
- COPLANALITY OF SOLDER TAILS (PEAK TEMP.:260°C 1 TIME)
BEFORE & AFTER REFLOW : 0.08 MAX

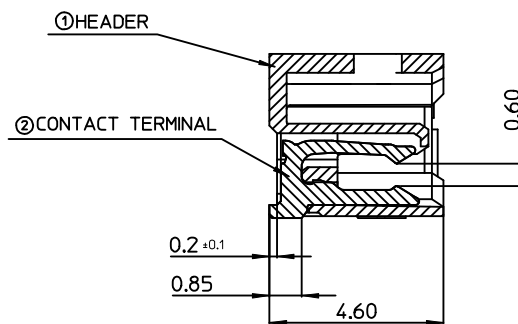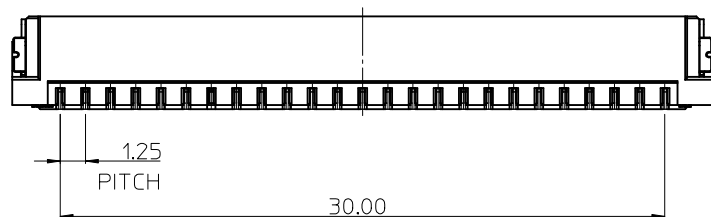

SECTION Z-Z

ORDER NO 104091-2520

RELEASED EC NO: KOR2012-0127 DRWN:SKCH0 CHKD:SHCHU APPR:YSKIM02 2012/07/09 2012/07/09 2012/08/06	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4/1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
			A	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							1.25 WTB CONN. R/A -25P HEADER ASS'Y	
											MOLEX INCORPORATED	
										SD-104091-013		
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						