




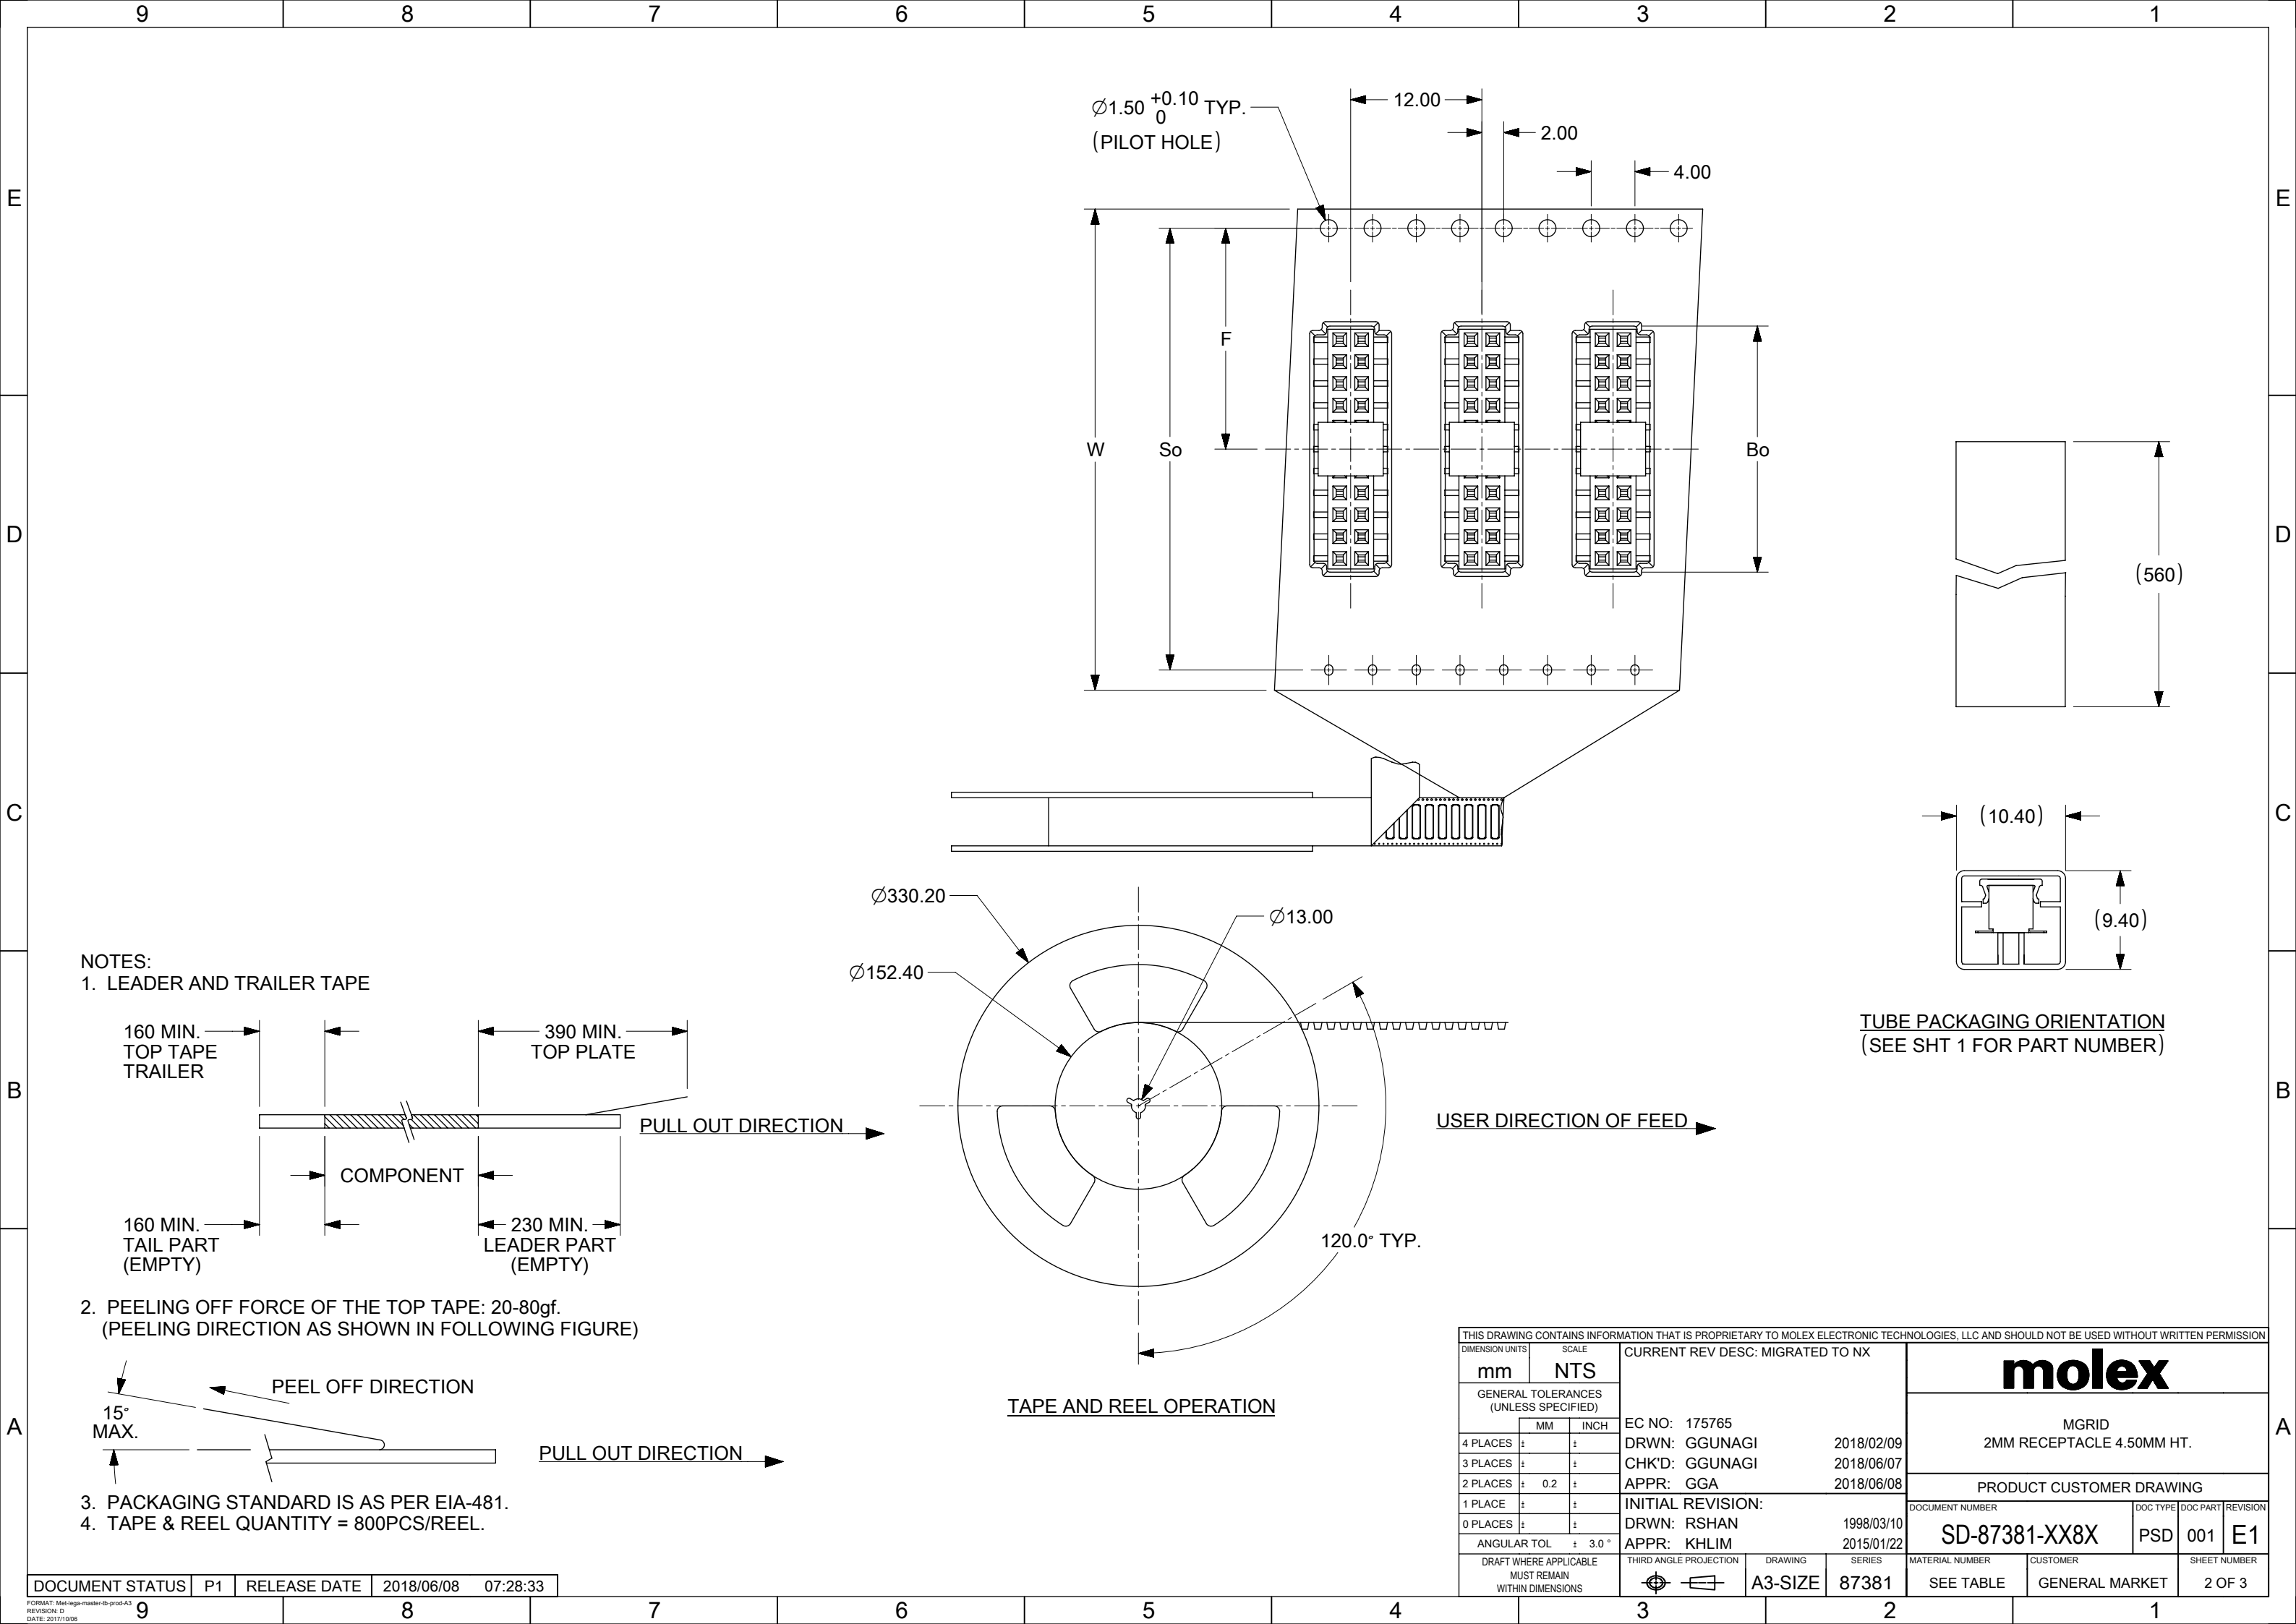

NOTES:
1. LEADER AND TRAILER TAPE

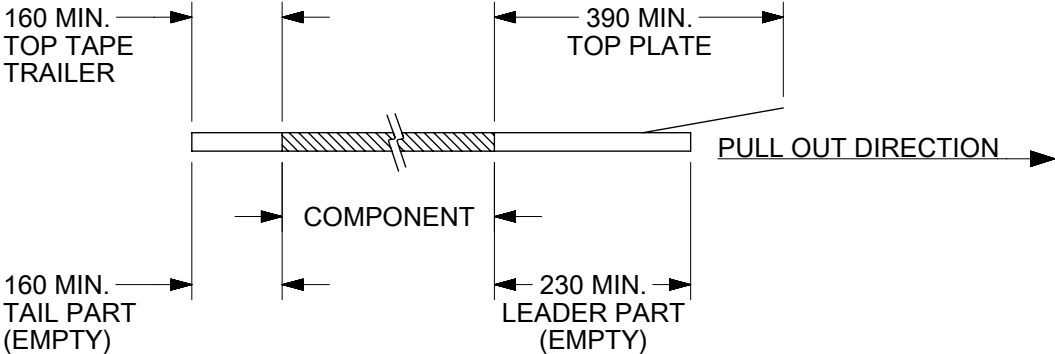


2. PEELING OFF FORCE OF THE TOP TAPE: 20-80gf.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)

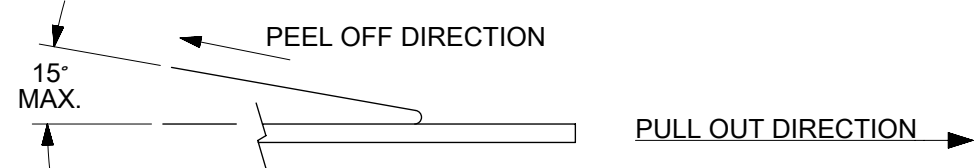

3. PACKAGING STANDARD IS AS PER EIA-481.
4. TAPE & REEL QUANTITY = 800PCS/REEL.

DOCUMENT STATUS	P1	RELEASE DATE	2018/06/08	07:28:33
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATED TO NX				molex							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 175765				MGRID 2MM RECEPTACLE 4.50MM HT.							
	MM	INCH													
4 PLACES	±	±		DRWN: GGUNAGI 2018/02/09				PRODUCT CUSTOMER DRAWING							
3 PLACES	±	±		CHK'D: GGUNAGI 2018/06/07											
2 PLACES	±	0.2	±	APPR: GGA 2018/06/08											
1 PLACE	±	±		INITIAL REVISION:				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION			
0 PLACES	±	±		DRWN: RSHAN 1998/03/10				SD-87381-XX8X		PSD	001	E1			
ANGULAR TOL		±	3.0°	APPR: KHLIM 2015/01/22											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER	SHEET NUMBER		
						A3-SIZE		87381		SEE TABLE		GENERAL MARKET		2 OF 3	

