
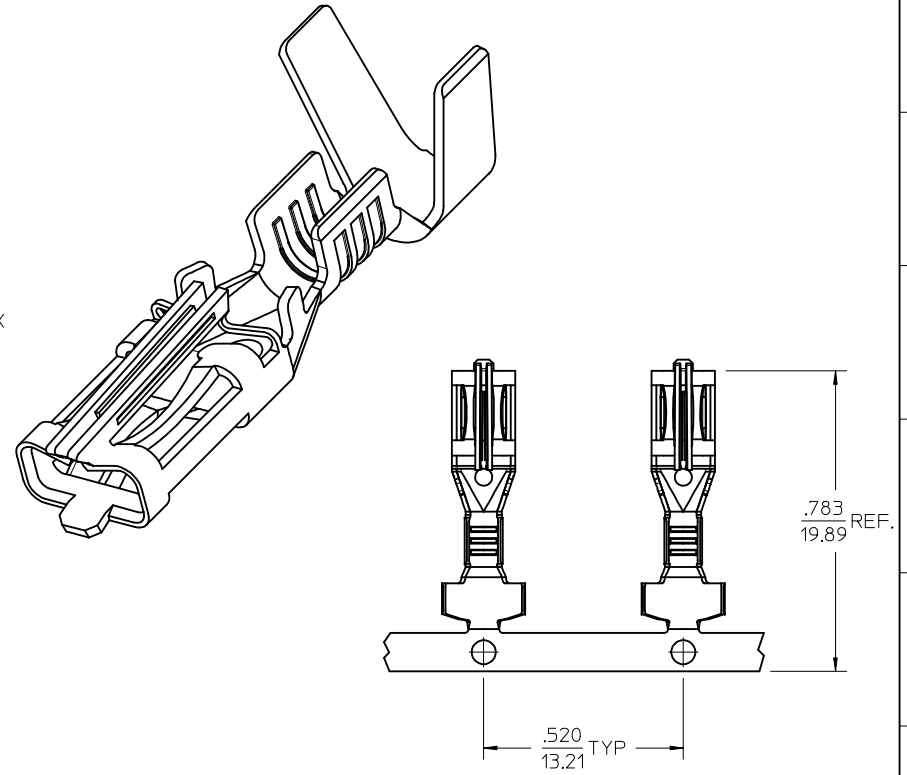


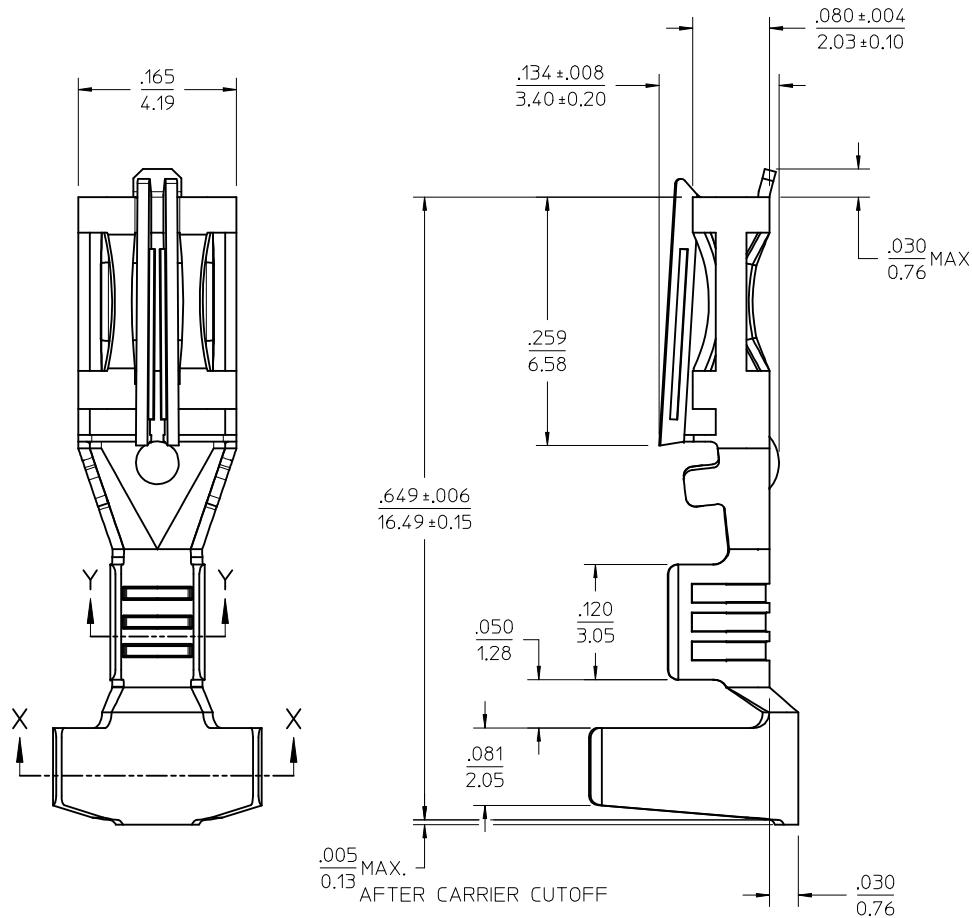

CARRIER STRIP PROGRESSION

NOTES:

1. MATERIAL: C26000 BRASS.
2. FINISH: 20 MICROINCH (0.5 MICROMETER) MINIMUM PREPLATED HOT TIN DIP.
3. PRODUCT SPECIFICATION: PS-43374-001.
4. PACKAGING: TERMINALS WOUND ON 24" REELS WITH PAPER INTERLEAF.
5. THIS TERMINAL FOR USE WITH 18-20 AWG STRANDED WIRE, UL 1015, 1056 OR SPT-3 STYLES, .100-.180 INSULATION DIAMETER. FOR FURTHER INFORMATION, REFER TO MOLEX APPLICATION TOOLING SPECIFICATION.
6. TERMINAL MATES TO .125/.93.18 WIDE X .020/(0.51) THICK FLAT BLADE TERMINALS OR MOLEX 43178 SERIES CRIMP TERMINALS.

CORRECT TOLERANCE EC NO: UCP2014-5466 DRWN: JDOX 2014/07/09 CHKD: ANDERSON 2014/07/09 APPR: FSMITH 2014/07/17 A3	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 10:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY BWIRKUS	DATE 09-09-2009	TITLE SABRE 18-20AWG CRIMP FEM .125 FL BLD TERM W/O TPA UL1015, 1056 OR SPT-3 molex	DOCUMENT NO. SD-43374-311	SHEET NO. 1 OF 1	
			4 PLACES	± ---	± ---	CHECKED BY	DATE				
			3 PLACES	± ---	± .010	BWIRKUS	09-09-2009				
			2 PLACES	± 0.25	± .014	APPROVED BY	DATE				
			1 PLACE	± 0.35	± ---	APATEL	09-09-2009				
			0 PLACE	± ---	± ---	MATERIAL NO. 433743001					
			ANGULAR ± ---°								
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			