

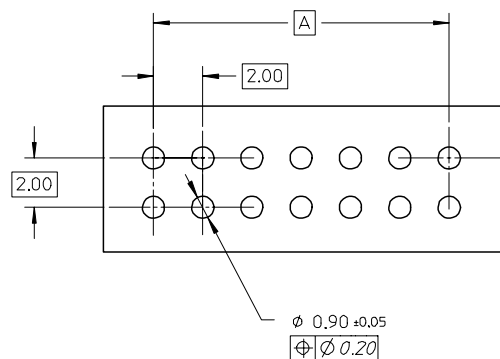



5. PRODUCT SPEC PS-87761-100 APPLIES.

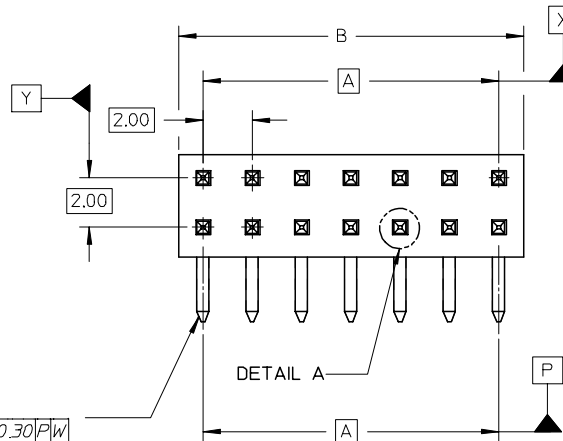


RECOMMENDED PCB LAYOUT

tb_frame_A3_P_AM_T
Rev. D 2004/06/28


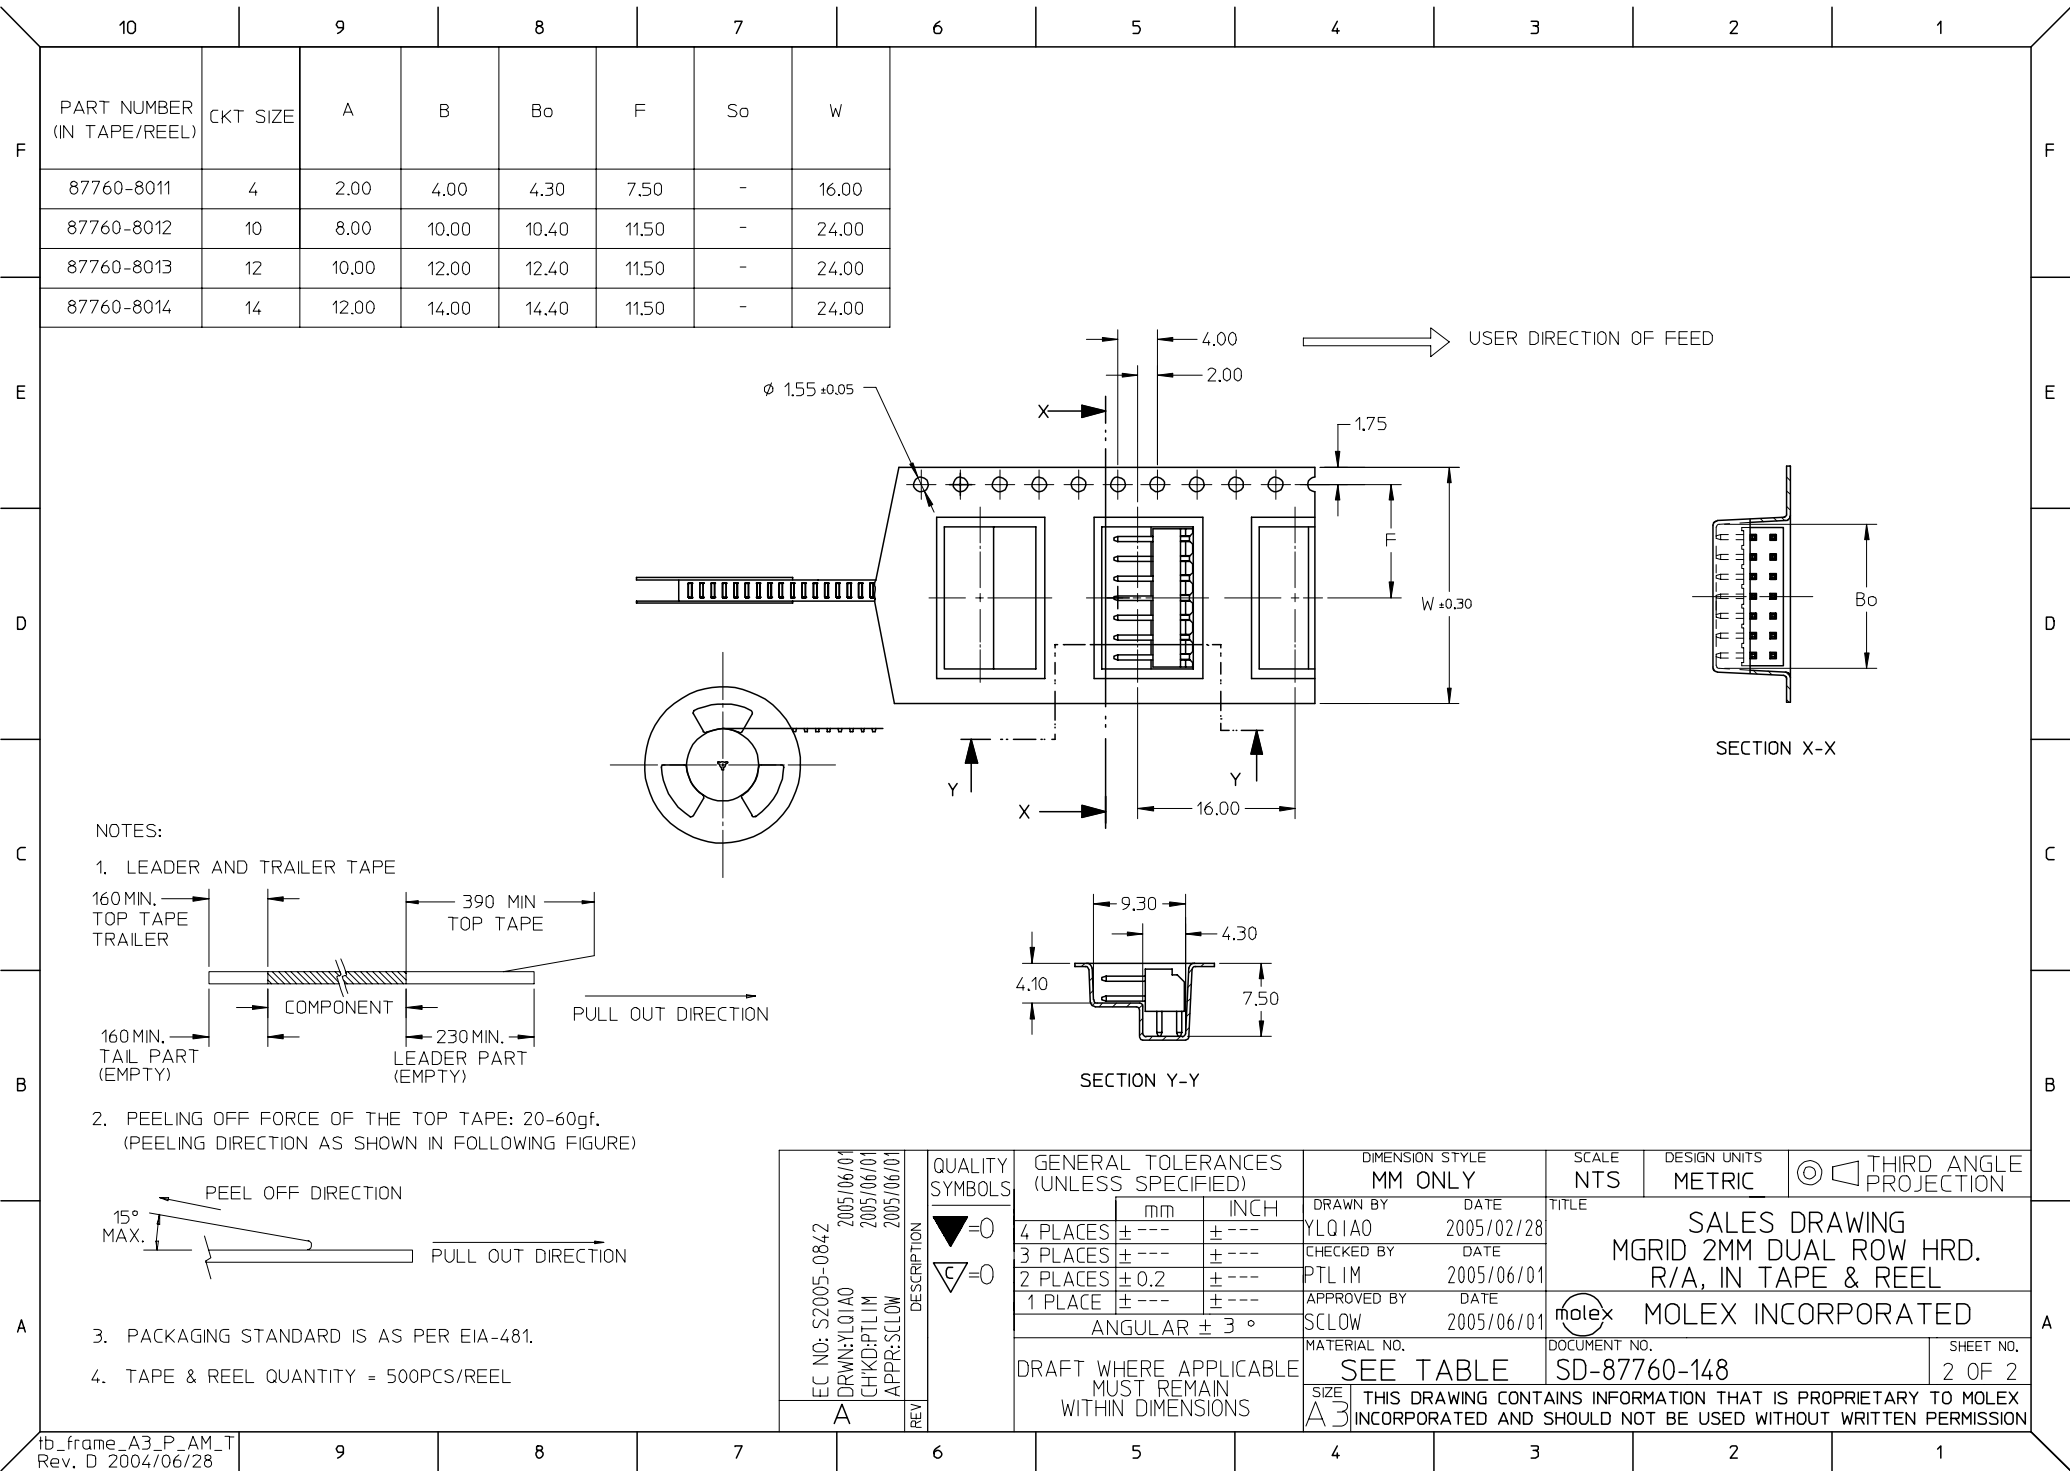


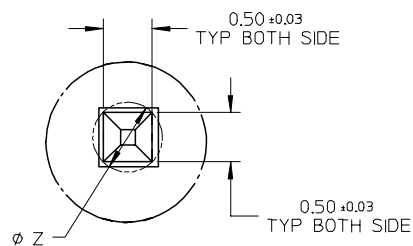


DETAIL A

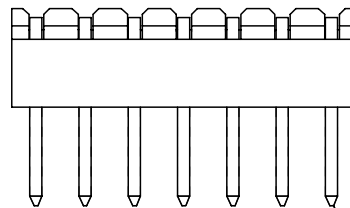

Ø Z
 $\Phi 0.30$

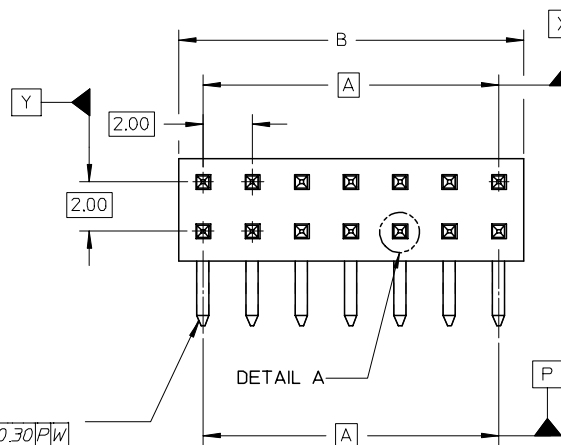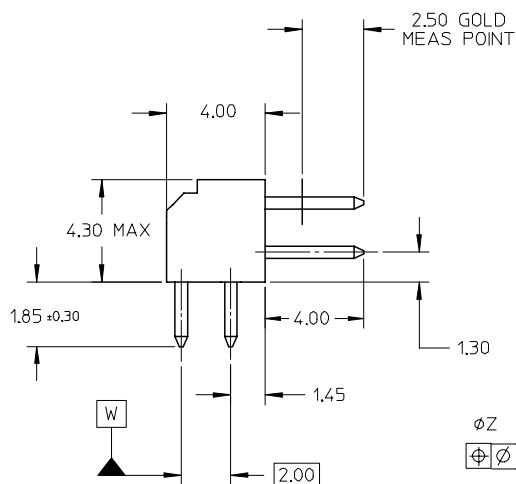

Ø Z
 $\Phi 0.30$

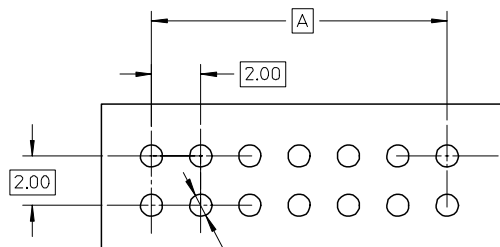

Ø 0.90 ± 0.05
 $\Phi 0.20$
 RECOMMENDED PCB LAYOUT

NOTES:

1. MATERIAL:
HSG: PCT, 30% GLASS FILLED, UL 94V-0, COLOUR BLACK.
PIN: 0.50MM SQ PHOSPHOR BRONZE 510
2. PLATING:
GOLD FLASH IN CONTACT AREA,
TIN IN SOLDER TAIL AREA, BOTH OVER NICKEL OVERALL
3. 14 CKT USED FOR ILLUSTRATION ONLY
4. PART TO BE PACKED IN TAPE & REEL (SEE SHT 2).
5. PRODUCT SPEC PS-87761-100 APPLIES.

QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM ONLY		NTS	METRIC		
				mm	INCH	DRAWN BY		DATE	
▽=0		4 PLACES		± ---	± ---	YLQ1A0		2005/02/28	
▽C=0		3 PLACES		± ---	± ---	CHECKED BY		DATE	
		2 PLACES		± 0.2	± ---	PTL IM		2005/06/01	
		1 PLACE		± ---	± ---	APPROVED BY		DATE	
				ANGULAR ± 3 °		SCLOW		2005/06/01	
						MATERIAL NO.		DOCUMENT NO.	
								SD-87760-148	
								SHEET NO.	
								1 OF 2	

DRAFT WHERE APPLICABLE
 MUST REMAIN
 WITHIN DIMENSIONS

SEE TABLE



SALES DRAWING
 MGRID 2MM DUAL ROW HRD.
 R/A, IN TAPE & REEL

MOLEX INCORPORATED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

