


PY Type 2.5 x 2.0 mm SMD Crystal Oscillator

FEATURE

- Typical 2.5 x 2.0 x 0.81 mm ceramic SMD package.
- Tight symmetry (45 to 55%) available.
- Operation voltage: 1.8V, 2.5V, 3.3V
- Tri-state enable/disable


TYPICAL APPLICATION

- Computer Peripherals
- Set-top Box , HDTV
- DSC, PDA




RoHS Compliant

DIMENSION (mm)

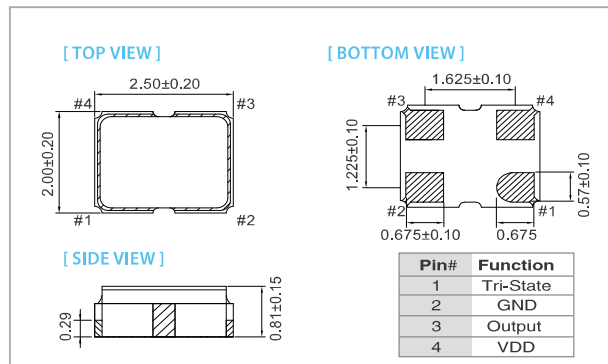

SOLDER PAD LAYOUT (mm)

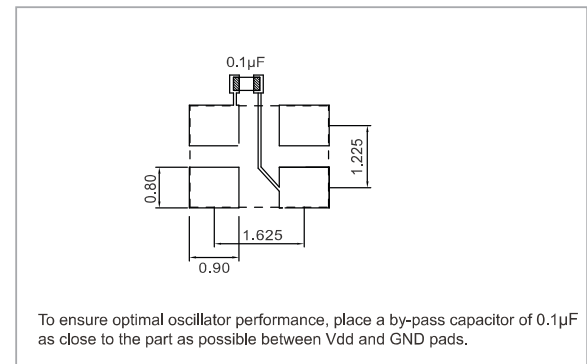

ELECTRICAL SPECIFICATION

Parameter	3.3 V		2.5 V		1.8 V		unit
	Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD)	VDD-10%	VDD+10%	VDD-10%	VDD+10%	VDD-10%	VDD+10%	V
Frequency Range	2.048	200	2.048	166	2.048	110	MHz
VDD Sensitivity (±10 %)	-2	2	-2	2	-2	2	ppm
Supply Current							mA
2.048 MHz ≤ Fo < 30 MHz	—	10	—	8	—	6	
30 MHz ≤ Fo < 75 MHz	—	12	—	10	—	8	
75 MHz ≤ Fo < 133 MHz	—	15	—	12	—	10	
133 MHz ≤ Fo < 166 MHz	—	18	—	15	—	—	
166 MHz ≤ Fo ≤ 200 MHz	—	20	—	—	—	—	
Duty Cycle	45	55	45	55	45	55	%
Output Level (CMOS)							V
Output High (Logic "1")	2.97	—	2.25	—	1.62	—	
Output Low (Logic "0")	—	0.33	—	0.25	—	0.18	
Transition Time: Rise/Fall Time ⁺							nSec
2.048 MHz ≤ Fo < 10 MHz	—	3	—	4	—	5	
10 MHz ≤ Fo	—	2	—	3	—	4	
Startup Time	—	8	—	8	—	8	mSec
Tri-State (Input to Pin 1)							V
Enable (High voltage or floating)	2.31	—	1.75	—	1.26	—	
Disable (Low voltage or GND)	—	0.99	—	0.75	—	0.54	
Period Jitter (Pk-Pk)							pSec
Specific Frequency ⁺	—	40	—	40	—	40	
Others	—	200	—	200	—	200	
Aging (@ 25°C 1st year)	—	±3	—	±3	—	±3	ppm
Storage Temp. Range	-55	125	-55	125	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

+ Transition times are measured between 10% and 90% of VDD, with an output load of 15pF.

Specific frequency including 4.0, 13.0, 22.0, 26.0, and 40.0MHz

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	±20	±25	±50
-10 ~ +60	○	○	○	○
-20 ~ +70	△	○	○	○
-40 ~ +85	×	○	○	○

* ○: Available △: Conditional X: Not available

* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.

Rev(11)09/2018

www.taitien.com

sales@taitien.com.tw

Specifications subject to change without notice.