

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	2B
Termination type	No contacts / Accessory
IP rating	0
Cable Ø	7.10 - 7.90 mm
Matching parts	
Status	active
Alternative part	



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	GMA*: Bend relief Green
Keying	No keying
Housing Material	Silicone elastomer VMQ
Cable Fixing	∅ 7.1 - 7.9 mm
Variant	V : Green
Weight	1.91 g

Performance

Configuration
Insulator
Rated Current


Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Temp (min / max): -60°C / +200°C
Temperature range in water steam: +140°C
IP Rating: 0

DRAWINGS

Draws

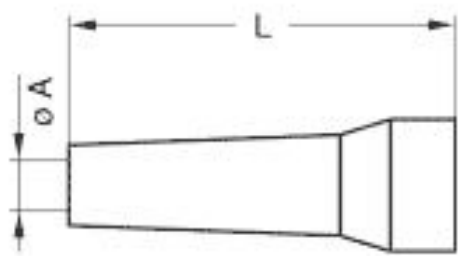

No keying

Dimensions

	A	L
mm.	7.1	41
in.	0,28	1,61

RECOMMENDED BY LEMO

Tools

None

Cables

160 222			
---------	--	--	--

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.