

## SUMMARY

### # Wires

Low	3
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Male crimp
IP rating	50
Cable Ø	7.30 - 9.20 mm
Matching parts	CKB.M03.GYMG
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CA*: Straight plug with cable collet
Keying	3 keys (alpha=0, gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 7.3 - 9.2 mm
Variant	
Weight	9.56 g

### Performance

Configuration	2P.M03 : 3 Low V.
Insulator	
Rated Current	17 Amps

### Specifications

Test voltage (kV rms) Contact-contact:	2.4
Air clearance min. (mm) or Creepage distance min. (mm):	1.5


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

- F ret (min): 150 N
- F ret (max): 250 N
- Steam sterilization: 20 times (with potting on rear connection)
- IP Rating: 50

DRAWINGS

Draws

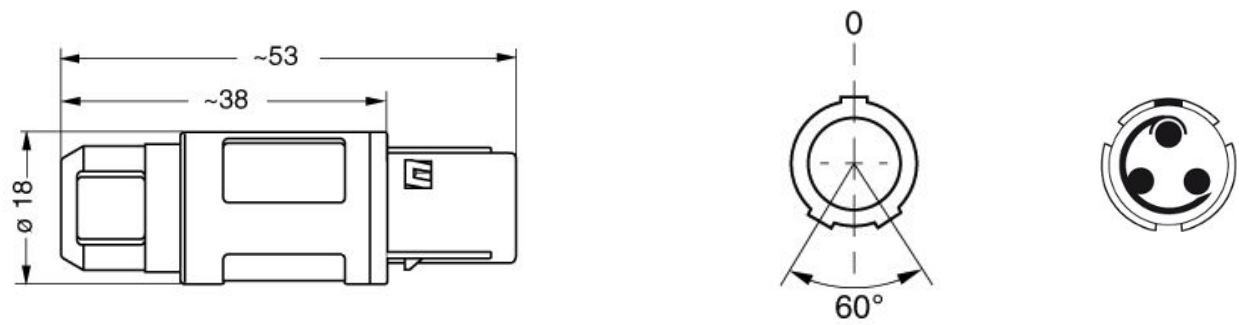

Dimensions

	A	L
mm.	18	53
in.	0,71	2,09

RECOMMENDED BY LEMO

Tools

- Crimp Tool: DPC.91.101.A
- Crimp settings: AWG/Selector = 14-16-18/7-6-5
- Positionner: DCE.91.162.BVCM
- Extractor: DCF.91.162.2LT
- Replacement contact: FGG.2B.570.ZZC

Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.