



| REV. | DESCRIPTION         | DATE       |
|------|---------------------|------------|
| A    | NEW DRAWING         | 11/19/2008 |
| B    | update to tolerance | 9/8/2009   |

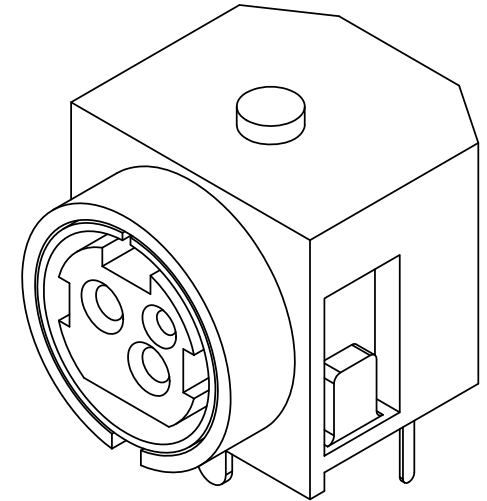

TOLERANCE:  
±0.2mm UNLESS OTHERWISE  
SPECIFIED

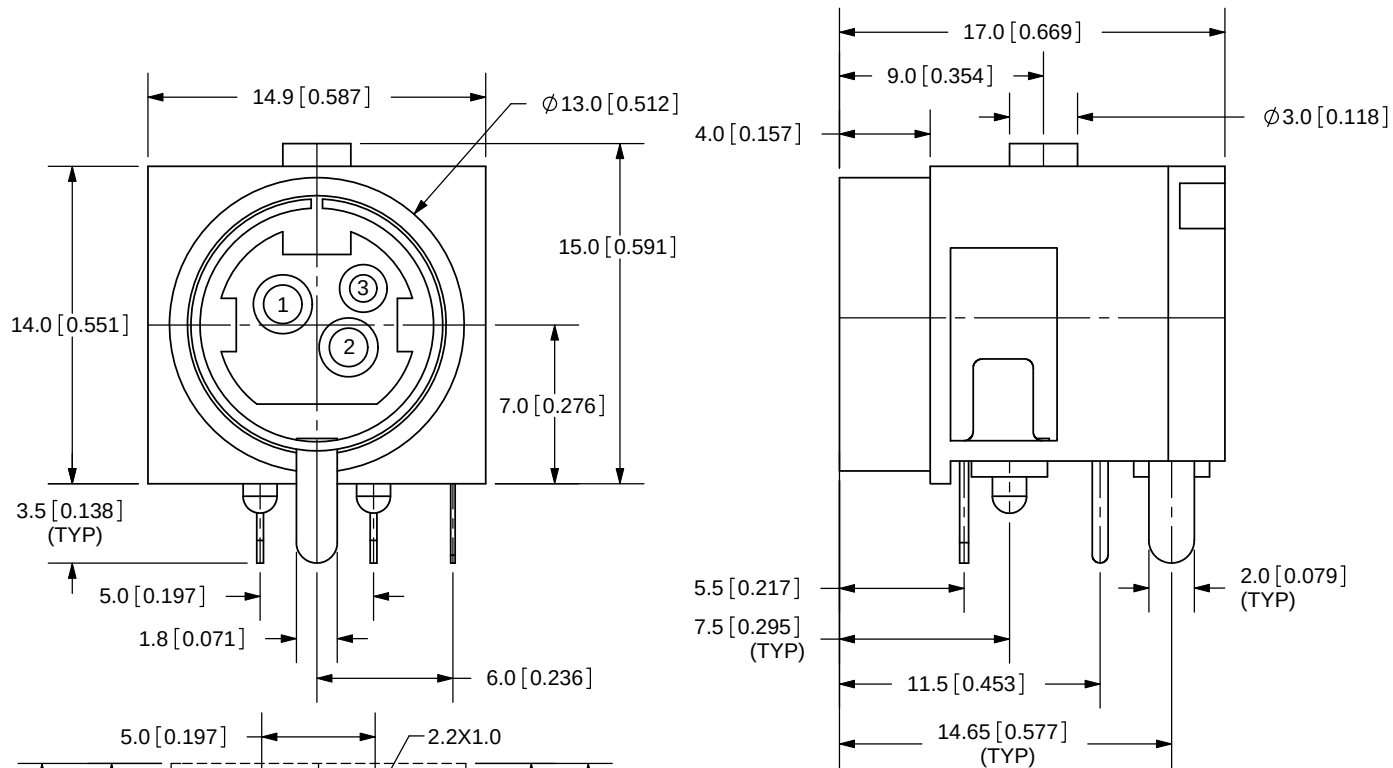

**SPECIFICATIONS:**  
 RATING: 20V DC@ 7.5A  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 50M OHMS MIN: 250V DC  
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE  
 INSERTION FORCE: 6.0KG MAX  
 WITHDRAWAL FORCE: 0.5 - 6.0KG  
 LIFE: 1,000 CYCLES



**CUI INC**

20050 SW 112th Ave.  
 Tualatin, OR 97062  
 Phone: 503-612-2300  
 800-275-4899  
 Fax: 503-612-2383  
 Website: www.cui.com

|                | MATERIAL        | PLATING | TITLE: 3-PIN POWER DIN JACK, RIGHT ANGLE,<br>NO SHIELDING | REV: B             |
|----------------|-----------------|---------|-----------------------------------------------------------|--------------------|
| TERMINAL 1     | Phosphor Bronze | Tin     | PART NO. PD-30                                            | UNITS: MM [INCHES] |
| TERMINALS 2-3  | Brass           | Tin     |                                                           |                    |
| EARTH TERMINAL | Brass           | Tin     | DRAWN BY: ZRJ                                             | APPROVED BY:       |
| HOUSING        | PBT             |         |                                                           |                    |
|                |                 |         | SCALE: 3:1                                                |                    |

PC FILE NAME:  
PD-30

COPYRIGHT 2008 BY CUI INC.