

## SUMMARY

### # Wires

Low	0
High	4
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	P
Termination type	Male solder
IP rating	50
Cable Ø	4.00 - 5.20 mm
Matching parts	PLG.N0.4GL.LG
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	PA*: Straight plug with cable collet and nut for fitting a bend relief
Keying	1 key (alpha=0; Plug: male contact; Receptacle: female contact)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 4 - 5.2 mm
Variant	G : Gray collet nut for bend relief
Weight	4.91 g

### Performance

Configuration	1P.N04 : 4 High Voltage
Insulator	
Rated Current	8 Amps

### Specifications

Test voltage (kV rms) Contact-contact:	2.5
Air clearance min. (mm) or Creepage distance min. (mm):	1.30 / 3.50


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

F ret (min): 50 N  
F ret (max): 150 N  
IP Rating: 50

DRAWINGS

Draws

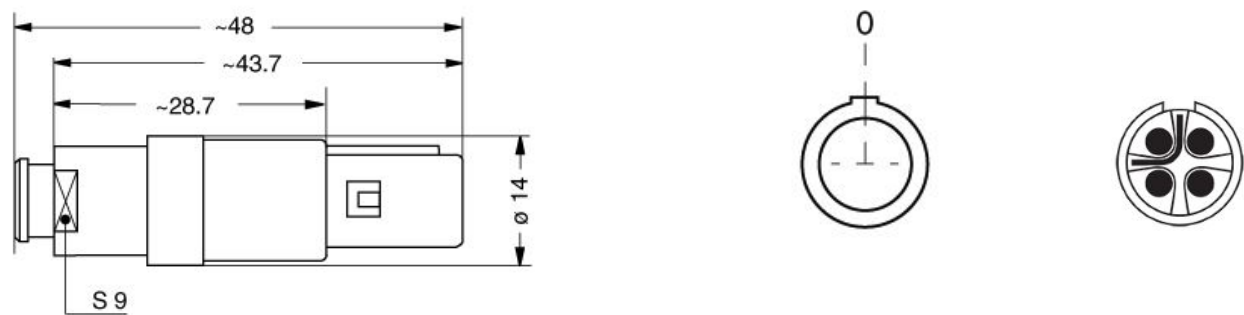

Dimensions

	A	L	S1
mm.	14	48	S9
in.	0,55	1,89	

RECOMMENDED BY LEMO

Tools

None

Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.