

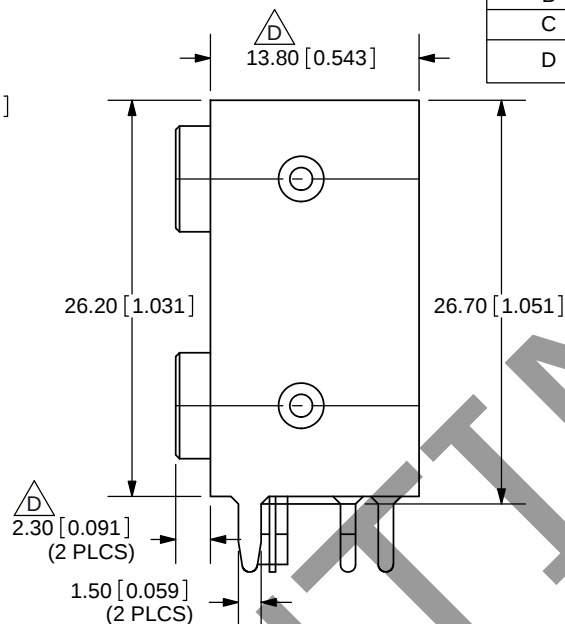
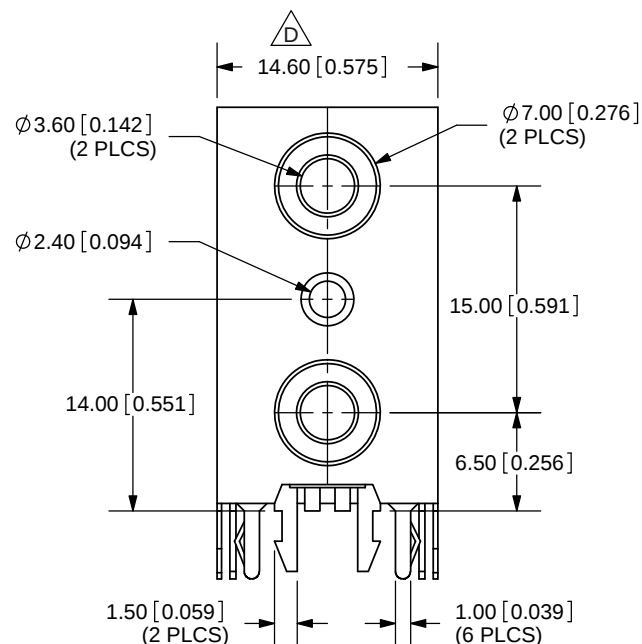
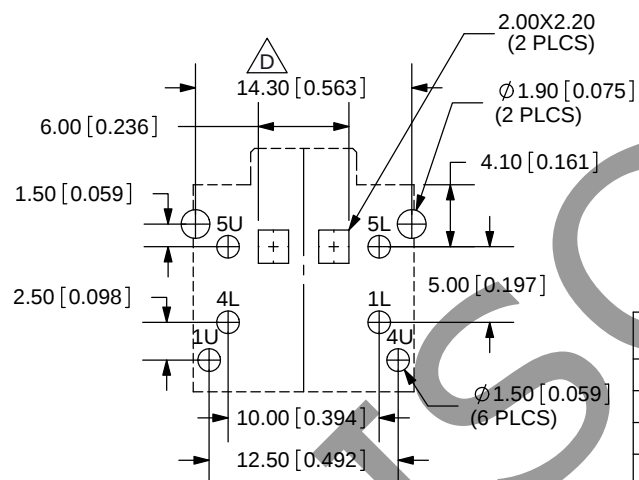


REV.	DESCRIPTION	DATE
A	NEW DRAWING	12/15/2005
B	Added dimensions	4/5/2006
C	housing material change	2/9/2011
D	shield dimensions changed, pcb layout updated, plastic and terminal material corrected	5/14/2013

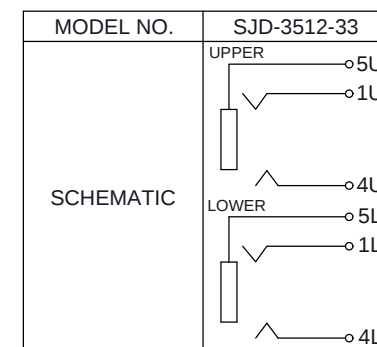

Scale: 1:1

PCB LAYOUT
TOP VIEW**SPECIFICATIONS:**

RATING: 16V DC @ 0.3A

CONTACT RESISTANCE: 50m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN: 500V DC

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES

OPERATING TEMPERATURE: -25~85 °C

TOLERANCE:
X.X ± 0.3 mm
X.XX ± 0.2 mm

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

	MATERIAL Δ	PLATING
TERMINAL 1U	Copper Alloy	Tin
TERMINAL 4U	Copper Alloy	Tin
TERMINAL 5U	Copper Alloy	Tin
TERMINAL 1L	Copper Alloy	Tin
TERMINAL 4L	Copper Alloy	Tin
TERMINAL 5L	Copper Alloy	Tin
FRONT SHIELD	SPCC	Nickel
BACK SHIELD	SPCC	Nickel
COVER	PBT	
HOUSING	PA-46	

TITLE: DUAL STACK 3.5mm STEREO JACK w/ SHLD	REV: D
PART NO. SJD-3512-33	UNITS: MM [INCHES]
DRAWN BY: RDS	APPROVED BY:
	SCALE: 2:1

PC FILE NAME:
SJD-3512-33

COPYRIGHT 2013 BY CUI INC.