

Customer Information Sheet

DRAWING No.: M50-360XX42R

SHEET 3 OF 4


IF IN DOUBT - ASK

©


NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

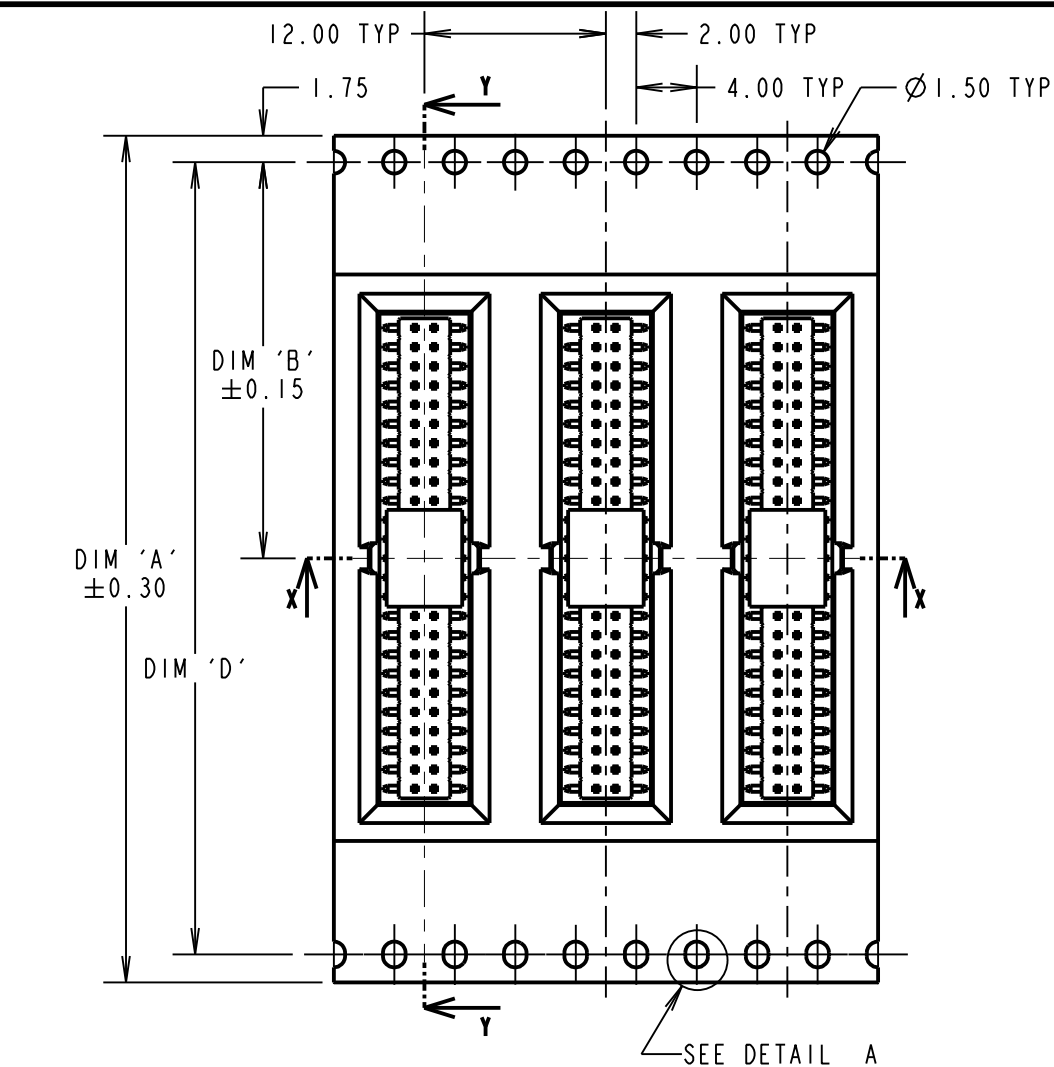


TAPE DETAILS FOR 20 & 25 WAYS

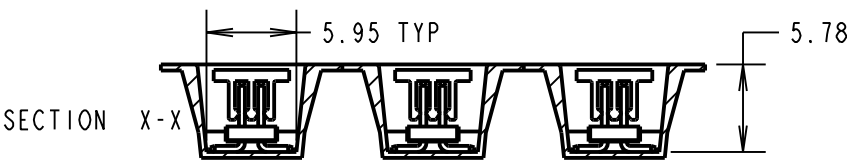

REELED PART No.	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'	REEL QTY
M50-3600242R	16.00	7.50	3.60	N/A	750
M50-3600342R			4.00		800
M50-3600442R			5.40		
M50-3600542R			6.65		
M50-3600642R	24.00	11.50	7.90	N/A	750
M50-3601042R			13.00		
M50-3602042R	44.00	20.20	25.70	40.40	
M50-3602542R	56.00	26.20	32.10	52.40	

- NOTES:
- CUMULATIVE TOLERANCES OVER 10 PITCHES = ±0.20mm
 - TAPE & REELING TO BE IN ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).
 - FOR CONNECTOR DETAILS SEE SHEET 4.

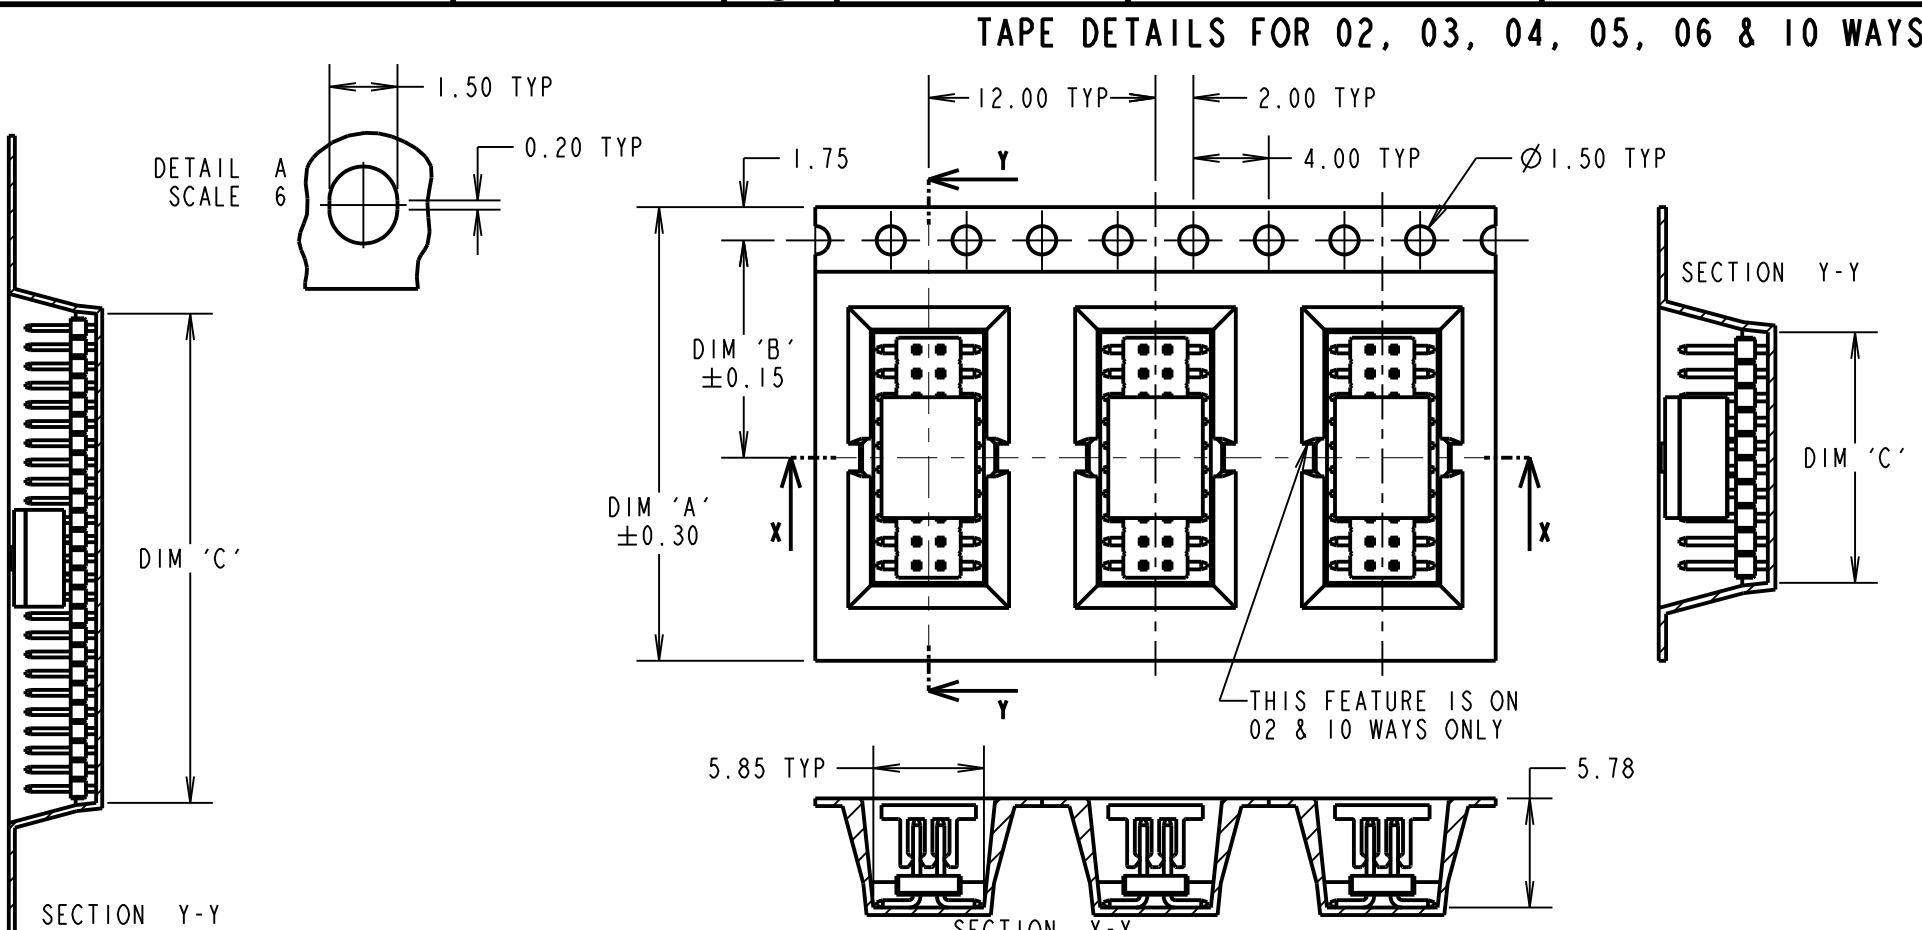




ORDER CODE:

M50-360XX42R

No. OF CONTACTS PER ROW:
02, 03, 04, 05, 06, 10, 20, 25

FINISH:
42 = SELECTIVE GOLD & 100% TIN OVER NICKEL

DETAILS FOR 02, 03, 06 AND 10 WAYS

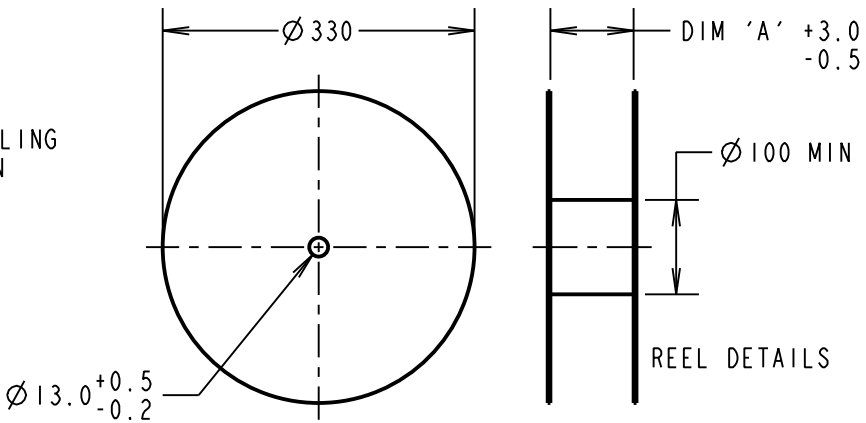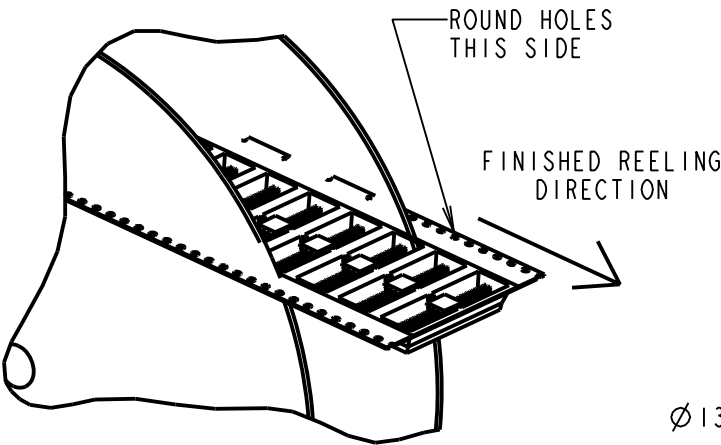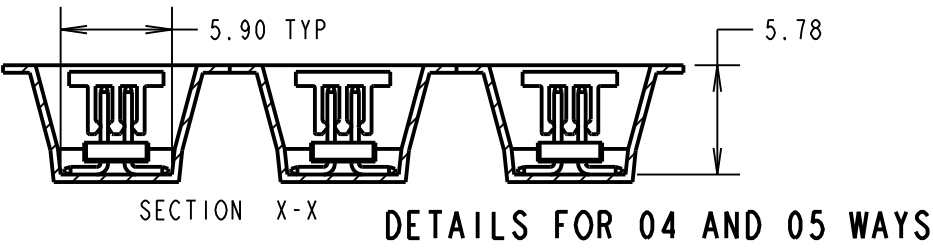

SB	13	20.12.17	20949
NAME	ISS.	DATE	C/NOTE
APPROVED: S.BENNETT			
CHECKED: F.McGOWAN			
DRAWN: R.ADDE			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com

technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm

X.X = ±0.50mm

X.XX = ±0.10mm

X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE: 1.27mm PITCH DIL SMT VERT LOW PROFILE SOCKET ASSY (TAPE & REEL)




DRAWING NUMBER:

M50-360XX42R

SHT 3 OF 4

Customer Information Sheet

DRAWING No.: M50-360XX42R SHEET 4 OF 4 IF IN DOUBT - ASK © NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

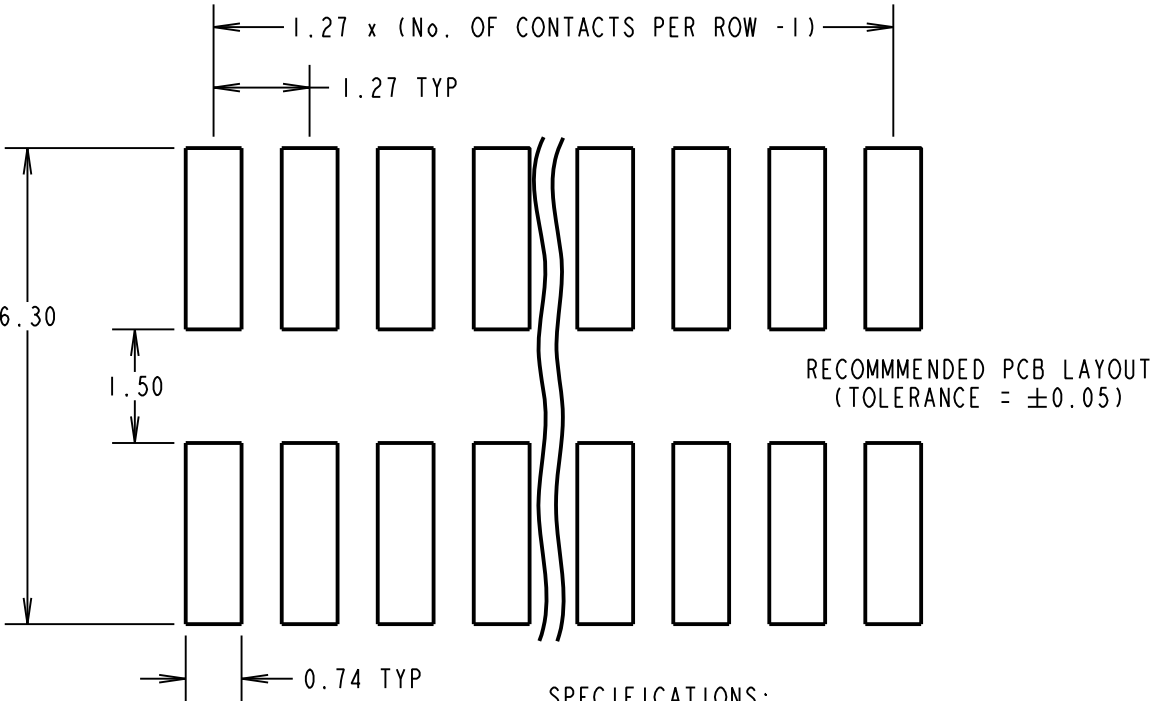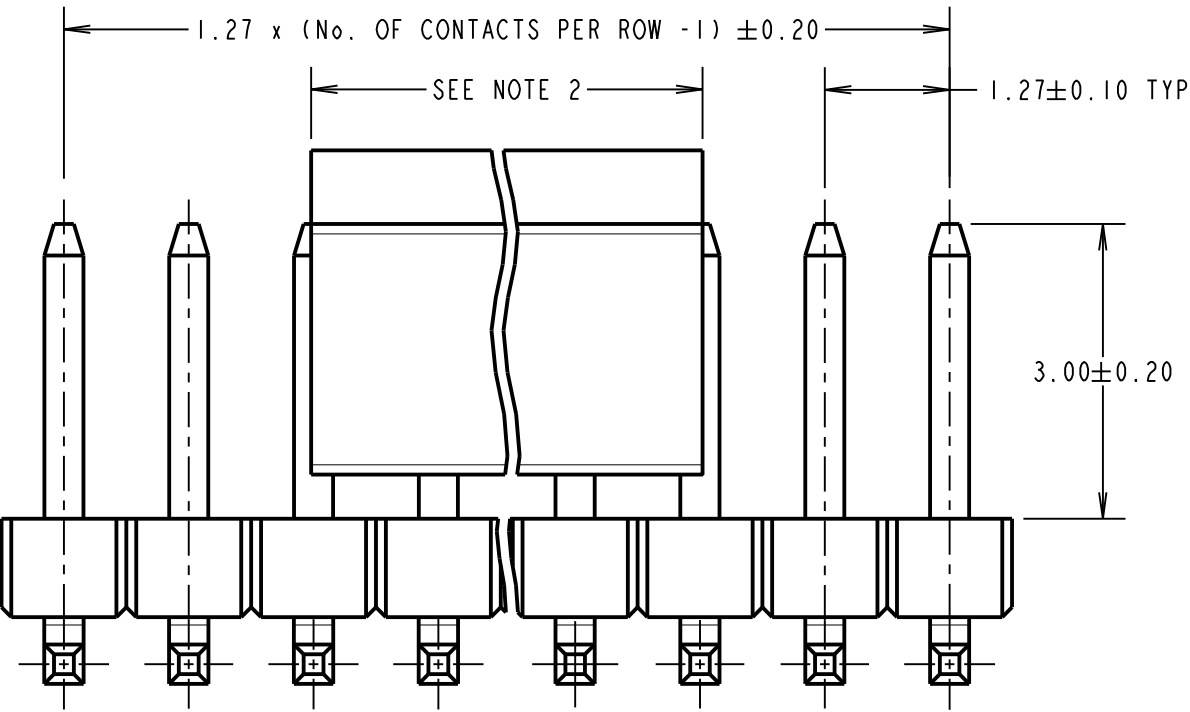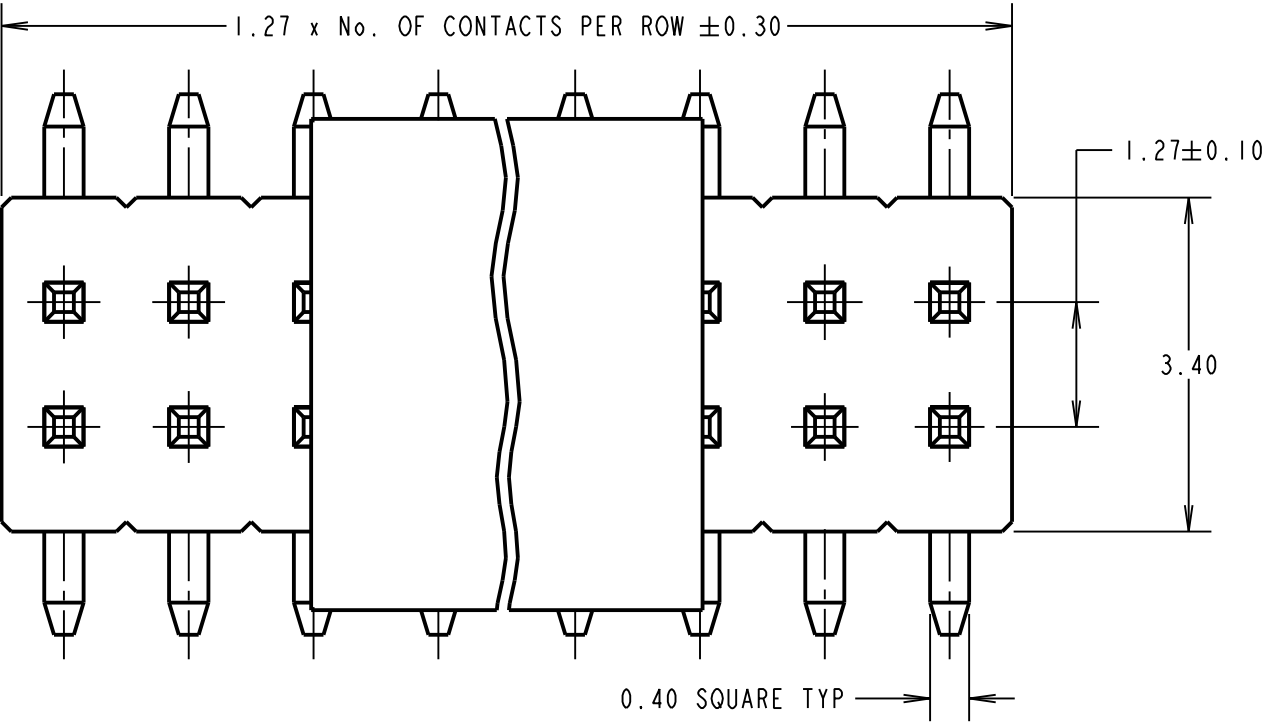

SPECIFICATIONS:

MATERIAL:

MOULDING = HIGH TEMP THERMOPLASTIC,
UL94V-0, BLACK

CONTACTS = COPPER ALLOY

FINISH:

CONTACTS = 0.70 TO 1.30 μ NICKEL ALL OVER,
0.08 TO 0.15 μ GOLD ON CONTACT AREA,
2.50 TO 3.00 μ 100% TIN ON TAILS

ELECTRICAL:

CURRENT RATING = 1A

CONTACT RESISTANCE = 20m Ω MAX

INSULATION RESISTANCE = 1000M Ω MIN

DIELECTRIC WITHSTANDING = 1000V AC FOR
ONE MINUTE

MECHANICAL:

DURABILITY = 300 CYCLES MIN


ENVIRONMENTAL:

TEMPERATURE RANGE = -40°C TO +105°C

PACKING:

BOX

FOR COMPLETE SPECIFICATION, SEE COMPONENT
SPECIFICATION C029XX (LATEST ISSUE)

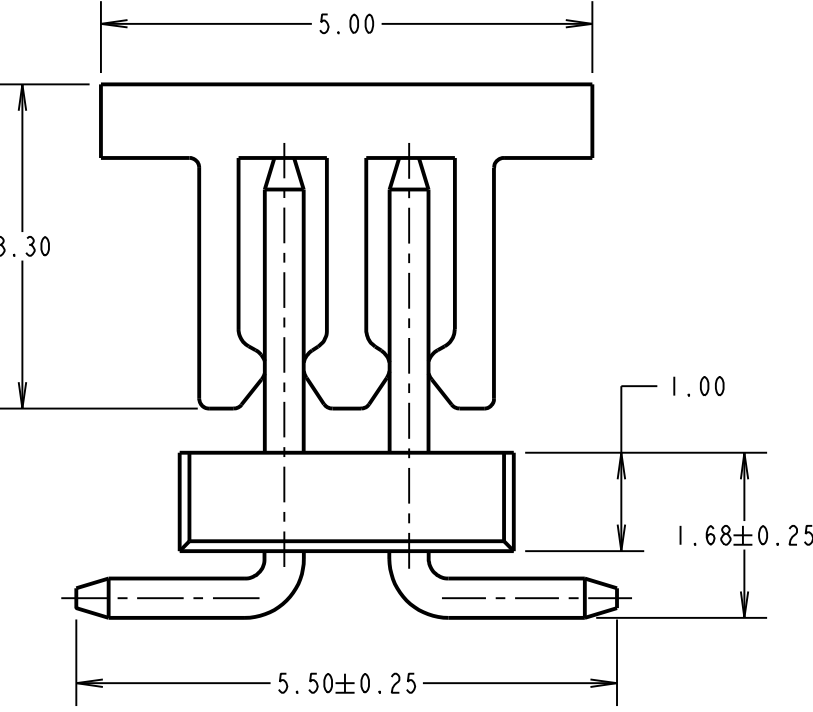

- NOTES:
- CO-PLANARITY OF TAILS FOR 02 TO 30 CONTACTS PER ROW = 0.15mm,
31 TO 50 CONTACTS PER ROW = 0.20mm.
 - PICK AND PLACE CAP LENGTH = 3.60mm FOR 02 TO 05 CONTACTS PER ROW,
6.40mm FOR 06 TO 50 CONTACTS PER ROW.
 - ALL TOLERANCES ARE ± 0.15 , UNLESS OTHERWISE STATED.
 - FOR TAPE AND REEL DETAILS, SEE SHEET 3.

ORDER CODE:

M50-360XX42R

No. OF CONTACTS PER ROW: _____

02, 03, 04, 05, 06, 10, 20, 25

FINISH: _____

42 = SELECTIVE GOLD & 100% TIN OVER NICKEL

SB	13	20.12.17	20949
NAME	ISS.	DATE	C/NOTE
APPROVED: S.BENNETT			
CHECKED: F.McGOWAN			
DRAWN: R.ADDE			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com

technical@harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES
X = ± 1 mm
X.X = ± 0.50 mm
X.XX = ± 0.10 mm
X.XXX = ± 0.01 mm
ANGLES = $\pm 5^\circ$
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE: 1.27mm PITCH DIL SMT VERT
LOW PROFILE SOCKET ASSY
(TAPE & REEL)

DRAWING NUMBER:

M50-360XX42R

SHT
4 OF 4