


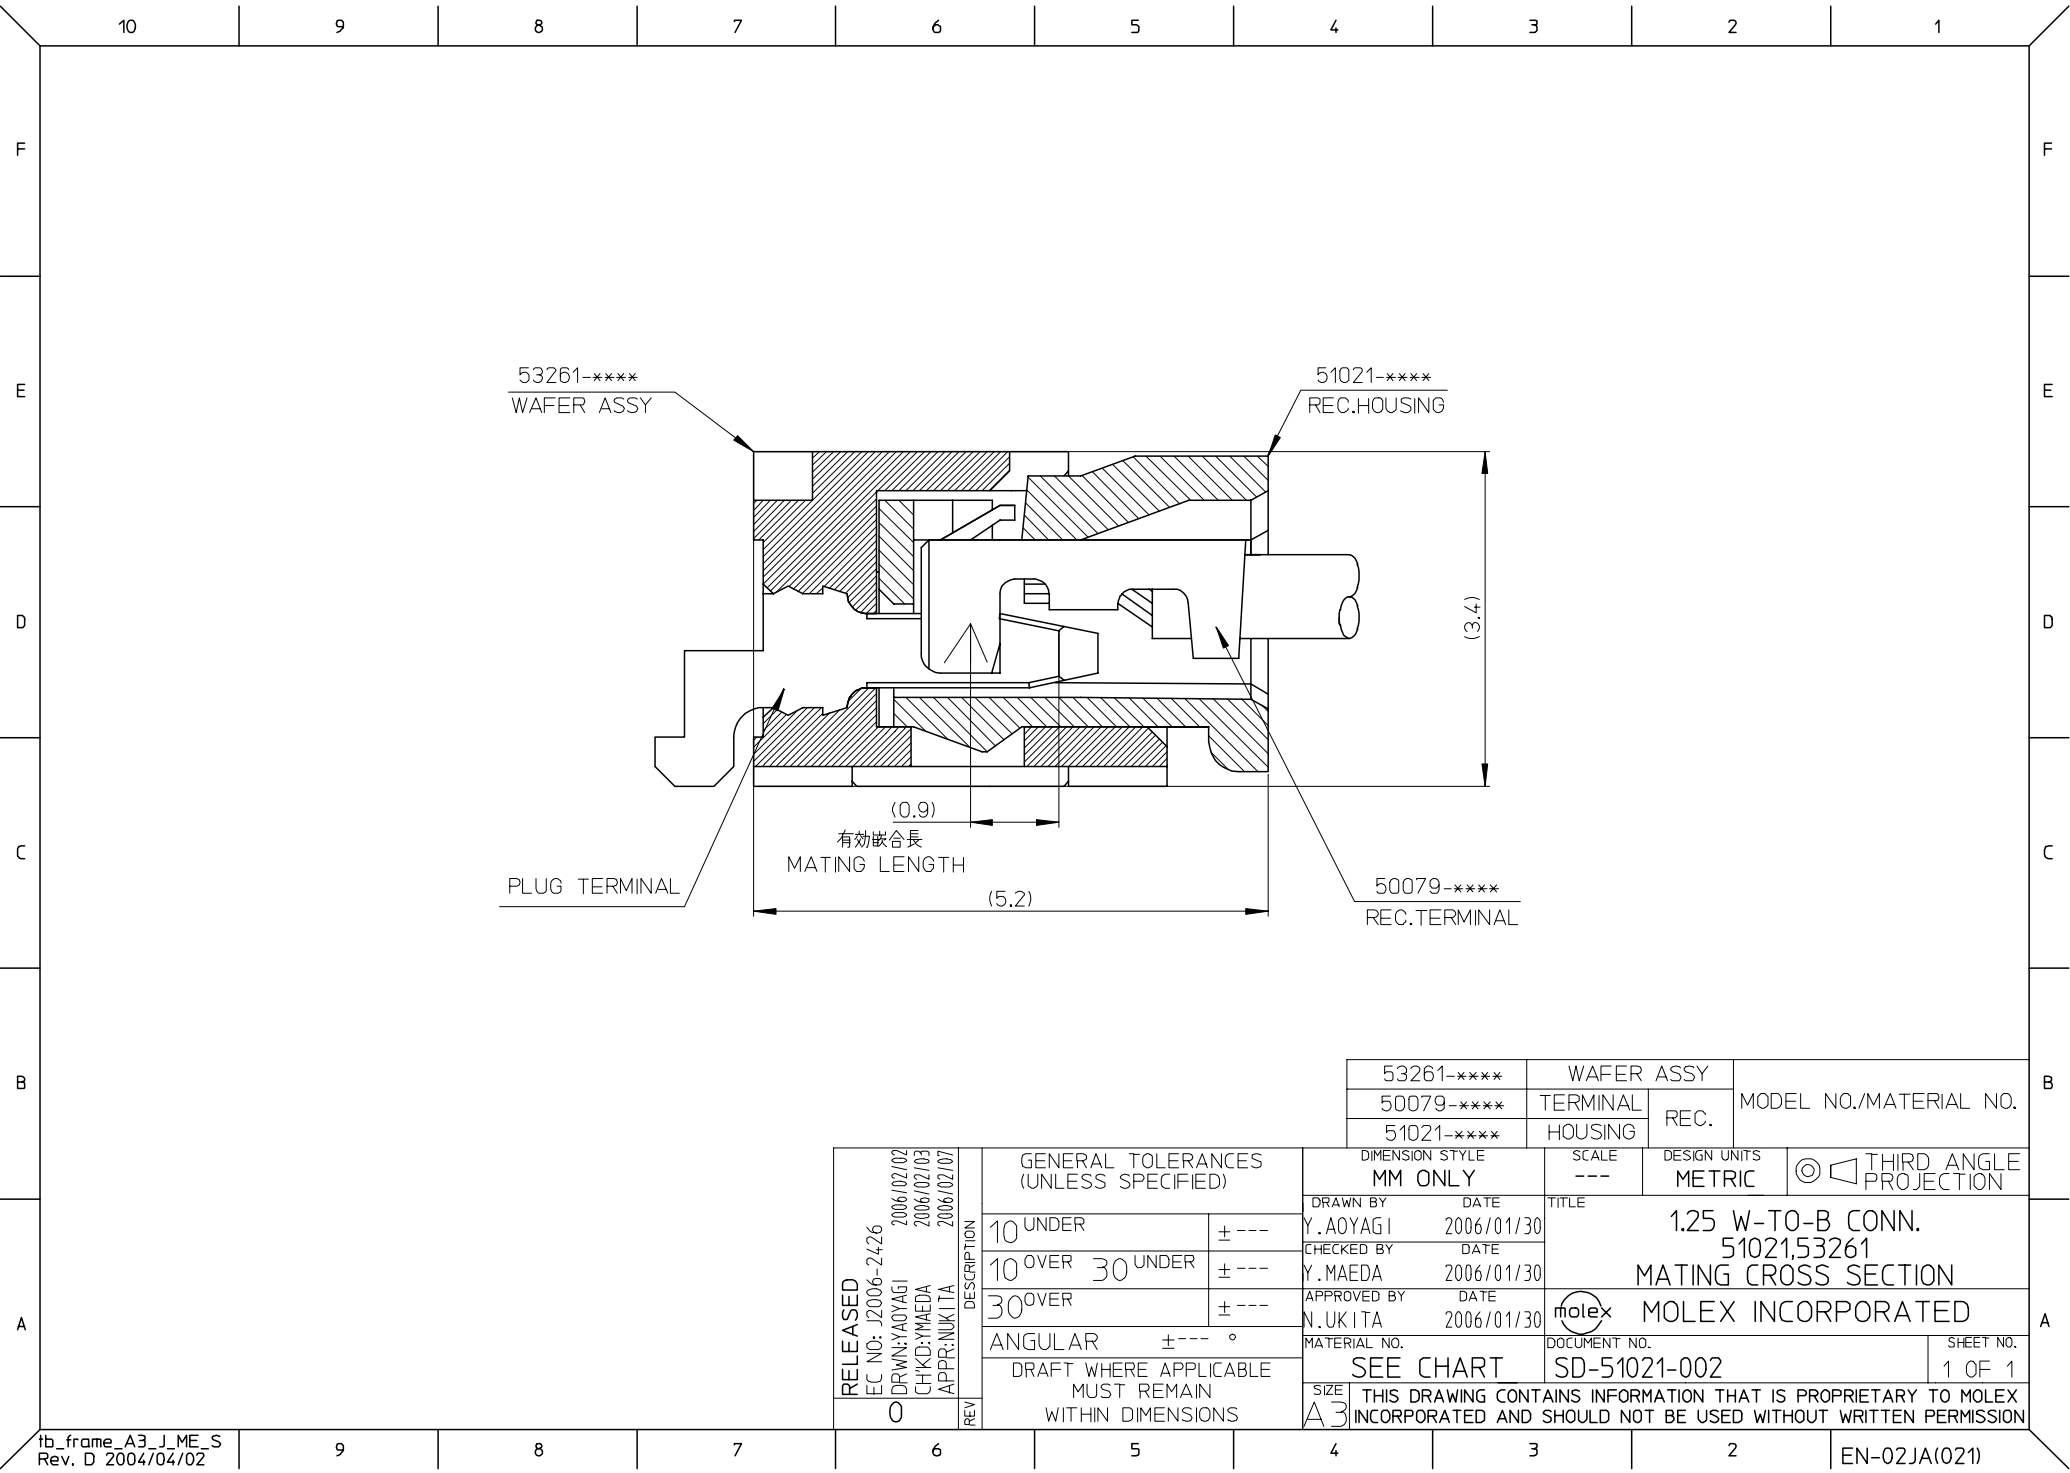

53261-****	WAFER ASSY	MODEL NO./MATERIAL NO.
50079-****	TERMINAL	
51021-****	HOUSING	

RELEASED EC NO: J2006-2426 DRWN:YA0YAGI 2006/02/02 CHKD:YMAEDA 2006/02/03 APPR:NUKITA 2006/02/07 REV 0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY DATE Y.AOYAGI 2006/01/30		TITLE 1.25 W-TO-B CONN. 51021,53261 MATING CROSS SECTION				
		10 OVER 30 UNDER	± ---	CHECKED BY DATE Y.MAEDA 2006/01/30						
		30 OVER	± ---	APPROVED BY DATE N.UKITA 2006/01/30		MOLEX INCORPORATED				
		ANGULAR ±--- °		MATERIAL NO.			DOCUMENT NO.			SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART			SD-51021-002			1 OF 1
	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

注記 NOTES

1. 53261-**-17 の詳細寸法については図面 SD-53261-025 を参照下さい。
RE DETAILED DIMENSIONS, SEE SD-53261-025

2. 梱包数量: 1000個/リール
NUMBER OF CONNECTOR: 1000PCS/REEL

3. リードテープ長さ LEAD TAPE LENGTH

トップテープリーダ部 TOP TAPE LEADER PART
トップテープ未接着部 TOP TAPE NON-BONDED PART

175⁺²⁵ 25⁺⁵

引き出し方向
PULL OUT DIRECTION

リーダ部 (空部) LEADER PART (EMPTY) 120⁺²⁰
部品挿入部 COMPONENT SUPPLIER
末端部 (空部) TAIL PART (EMPTY) 150⁺⁴⁰

4. トップテープの剥離強度: 0.1~1.3N {10~130gf} (剥離方向は下図参照)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N {10~130gf}
(PEELING DIRECTION IS SHOWN IN FOLLOWING FIG.)

<剥離速度: 300mm/min (参考)>

PEELING SPEED: 300mm/min. (REFERENCE)

引き出し方向
PULL OUT DIRECTION

剥離方向
PEEL OFF DIRECTION

5. 材料 (MATERIAL)

キャリアテープ (CARRIER TAPE): ポリプロピレン (POLYPROPYLENE)

トップテープ (TOP TAPE): PET, PE, PEF

リール (REEL): ポリスチレン (PS) <リサイクル材含む>

POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>

△ コネクタ、ハウジング平面部

CONNECTOR, HOUSING FLAT AREA

7. 本製品は 53261-**-95, -**-98 の鉛フリー品である。

THIS PRODUCT IS LEAD FREE OF 53261-**-95, -**-98.

8. 本製品は乾燥剤入り、ハイバリア梱包品である。

THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

I6	21.4	17.4	2.45	8.25	53261-0227	2
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	B	A	MATERIAL NO.	極数 CKT.

MODEL NO. 53261-**-27

DIMENSION STYLE
MM ONLY

SCALE

METRIC

DESIGN UNITS
THIRD ANGLE PROJECTION

DRAWN BY Y. WADA

DATE '04/04/12

TITLE

CHECKED BY M. SASAO

DATE '04/04/12

APPROVED BY M. SASAO

DATE '04/04/12

MATERIAL NO.

DOCUMENT NO.


SHEET NO.

SEE CHART


SD-53261-026

1 OF 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

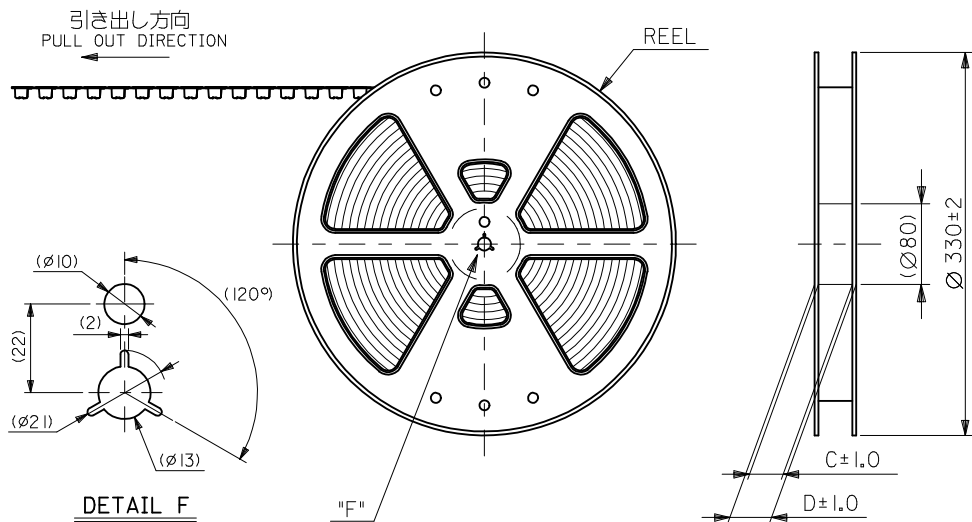


DETAIL F

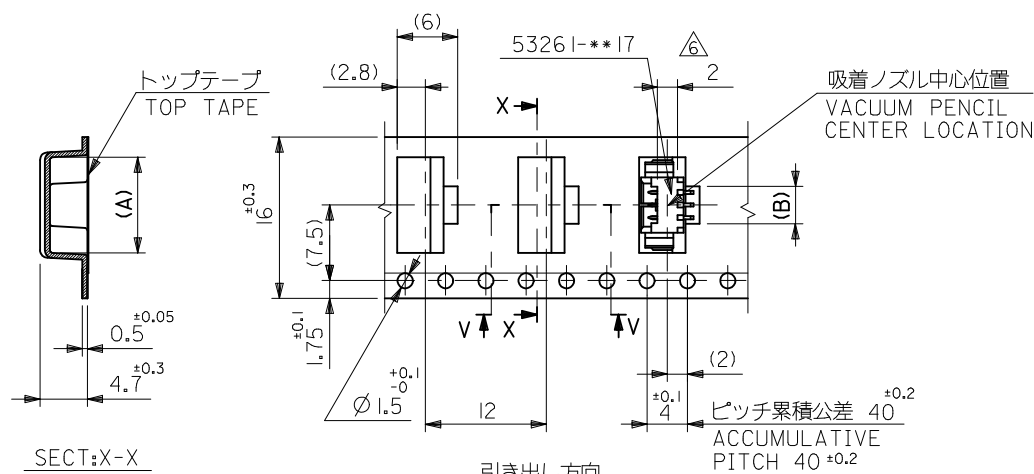

SECT:X-X

引き出し方向
PULL OUT DIRECTION

16mm 幅キャリアテープ
16mm WIDTH CARRIER TAPE



SECT:V-V

REVISED
EC NO: J2009-2060
DRWN:TKN
CHKD:MATSUMOTO
APPR:NUKITA
REV D

GENERAL TOLERANCES
(UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

SIZE
A3

1.25 W/B CONN. WAFER
ASSY SMT EMBSTP PKG
-LEAD FREE-
MOLEX INCORPORATED
SD-53261-026

10

9

8

7

6

5

4


3

2


1

引き出し方向
PULL OUT DIRECTION

トップテープ
TOP TAPE

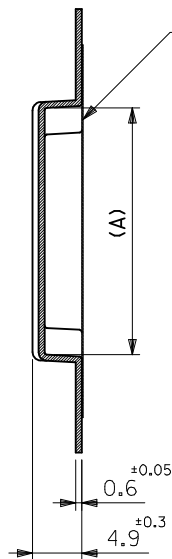


SECT:R-R



SECT:S-S

44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

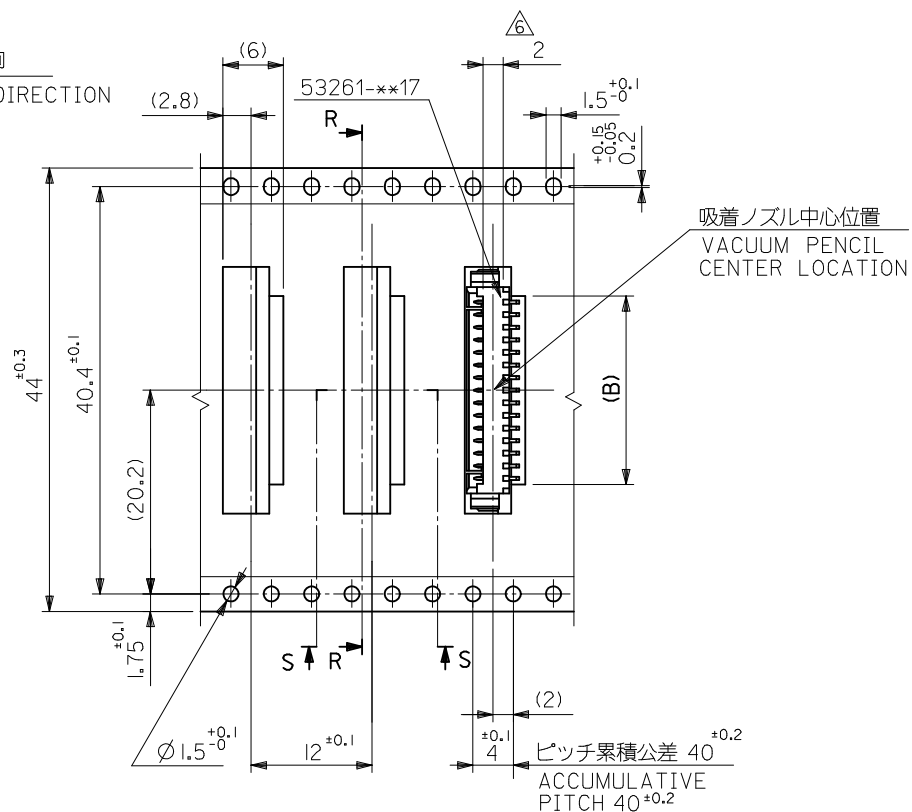

44	49.5	45.4	17.45	23.25	53261-1427	14
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	B	A	MATERIAL NO.	極数 CKT.

MODEL NO. 53261-**27

REVISED EC NO: J2009-2060 DRWN:TKON CHKD:HMATSUMOTO APPR:NUKITA 2009/05/20 2009/05/21 2009/05/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
		10 UNDER	± 0.2	DRAWN BY Y. WADA	DATE '04/04/12	TITLE 1.25 W/B CONN. WAFER ASSY SMT EMBSTP PKG -LEAD FREE-			
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. SASAO	DATE '04/04/12				
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE '04/04/12	 MOLEX INCORPORATED			
		ANGULAR ±3 °		MATERIAL NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-53261-026		3 OF 3	
	REV			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9

8

7

6

5

4

3

2