

Low Noise Amplifier 1.575 GHz

Rev. V1

Features

- Low Noise Figure: 1.15 dB
- High Gain: 27 dB
- Low Power Consumption: 5V, 20 mA
- High Dynamic Range
- Lead-Free SOIC-8 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- 260°C Reflow Compatible
- RoHS* Compliant Version of AM50-0002

Description

M/A-COM's MAALSS0042 is a high performance GaAs MMIC low noise amplifier in a lead-free SOIC 8-lead surface mount plastic package. The MAALSS0042 employs a monolithic 3-stage self-bias design and a simple external matching network to obtain minimum noise figure.

The MAALSS0042 is ideally suited for use where low noise figure, high gain, high dynamic range and low power consumption are required. Typical applications include receiver front ends in the Global Positioning System (GPS) market, as well as standard gain blocks, buffer amps, driver amps, and IF amps in both fixed and portable systems.


M/A-COM'S MAALSS0042 is fabricated using a mature 0.5-micron gate length GaAs process. The process features full passivation for increased performance reliability.

Ordering Information ^{1,2}

Part Number	Package
MAALSS0042	Bulk Packaging
MAALSS0042TR-3000	3000 piece reel
MAALSS0042SMB	Sample Test Board

1. Reference Application Note M513 for reel size information.
2. Die quantity varies.

Functional Diagram

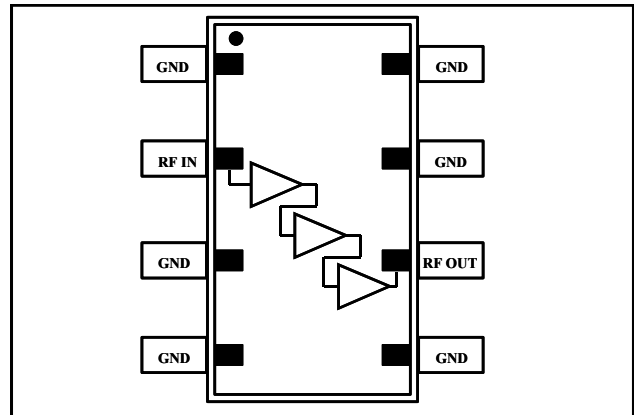

Pin Configuration ^{3,4,5}

Pin No.	Pin Name	Description
1	GND	Ground
2	RF IN	RF Input
3	GND	Ground
4	GND	Ground
5	GND	Ground
6	RF OUT	RF Output, V _{DD}
7	GND	Ground
8	GND	Ground

3. Pins 1, 3, 4, 5, 7, and 8 must be RF and DC grounded (see Recommended PCB Configuration).
4. Pin 2 is the RF input and must be connected to the simple matching network shown in the Application Schematic.
5. Pin 6 is the RF output. V_{DD} is also applied on Pin 6.

Absolute Maximum Ratings ^{6,7}

Parameter	Absolute Maximum
V _{DD}	+10 VDC
Input Power	17 dBm
Channel Temperature ⁸	+150 °C
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C

6. Exceeding any one or combination of these limits may cause permanent damage to this device.
7. M/A-COM does not recommend sustained operation near these survivability limits.
8. Typical thermal resistance (θ_{JC}) = +165 °C/W

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

Rev. V1

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	F = 1.575 GHz, P _{IN} = -35 dBm	dB	25	27	29
Noise Figure	F = 1.575 GHz, P _{IN} = -35 dBm	dB	-	1.15	1.4
Input VSWR	F = 1.575 GHz, P _{IN} = -35 dBm	Ratio	-	2.0:1	-
Output VSWR	F = 1.575 GHz, P _{IN} = -35 dBm	Ratio	-	1.5:1	-
Output P1dB	F = 1.575 GHz	dBm	-	1	-
Input IP ₃	F = 1.575 GHz, P _{IN} = -35 dBm	dBm	-	-14	-
Reverse Isolation	F = 1.575 GHz, P _{IN} = -35 dBm	dB	-	48	-
Bias Current	—	mA	15	20	25

Technical drawing of the FR-4 circuit board showing dimensions and plating specifications. The drawing includes the following dimensions and features:

- Overall width: 0.244 (6.20)
- Overall height: 0.172 (4.37)
- Top-left corner radius: 0.072 (1.83)
- Top-left corner thickness: 0.060 (1.52)
- Top-left corner width: 0.024 (0.61)
- Top-left corner height: 0.109 (2.77)
- Top-right corner radius: 0.112 (2.84)
- Top-right corner thickness: 0.245 (6.22)
- Top-right corner width: 0.030 (0.76)
- Top-right corner height: 0.060 (1.52)
- Bottom-left corner radius: 0.072 (1.83)
- Bottom-left corner thickness: 0.060 (1.52)
- Bottom-left corner width: 0.024 (0.61)
- Bottom-left corner height: 0.109 (2.77)
- Bottom-right corner radius: 0.112 (2.84)
- Bottom-right corner thickness: 0.245 (6.22)
- Bottom-right corner width: 0.030 (0.76)
- Bottom-right corner height: 0.060 (1.52)
- RF IN (Radio Frequency Input) port on the left side.
- RF OUT (Radio Frequency Output) port on the right side.
- 2X R 0.025 (0.64) PLATED THRU (Two through holes with a radius of 0.025 inches).
- 12X R 0.008 (0.20) PLATED THRU (Twelve through holes with a radius of 0.008 inches).

	Frequency = 1.575 GHz	
	Impedance	Electrical Length
T1	57.2 Ω	36.0°
T2	82.7 Ω	16.2°

The drawing illustrates the mechanical specifications of a 16-pin DIP package. It includes three views: a top view, a side view, and an end view.

Top View: Shows the package layout with labels for PART NUMBER (XX-XXX), DATE/LOT CODE (YYWWXXXX), COMPANY LOGO (MACOM), and ORIENTATION MARK. Dimensions include a body width of .0075/.0098 (1.91/2.51), a body height of .1497/.1574 (3.80/4.00), a pin pitch of .050 (1.27), and a pin width of .013/.020 (.33/.51). The package is 8 pins wide.

Side View: Shows the package height of .0532/.0688 (1.35/1.75) and a total height of .1890/.1968 (4.80/5.00).

End View: Shows the package width of .0040/.0098 (.10/.25) and a pin width of .016/.050 (0.40/1.27).

Notes:

- REFERENCE JEDEC MS-012-AA. FOR ADDITIONAL DIMENSIONAL AND TOLERANCE INFORMATION.
- REFERENCE M538 APPLICATION NOTE FOR FOOTPRINT INFORMATION.
- ALL DIMENSIONS SHOWN AS INCHES/MM.


2

Low Noise Amplifier 1.575 GHz


Rev. V1

Typical Performance


Gain, $T_A = +25^\circ\text{C}$

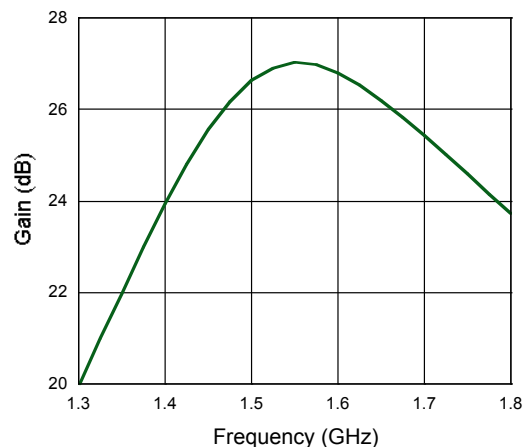


Gain over Temperature

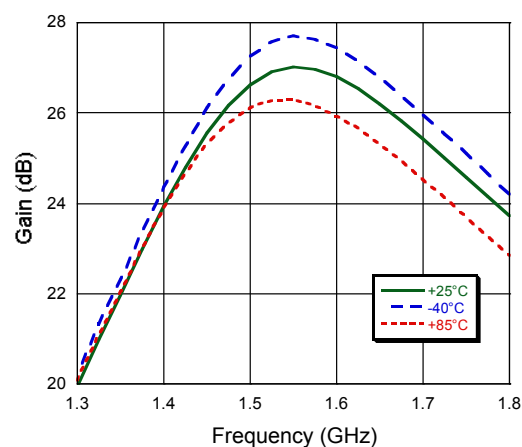


Noise Figure, $T_A = +25^\circ\text{C}$

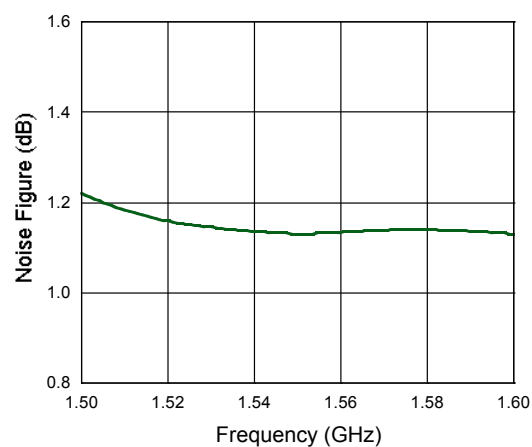


Noise Figure over Temperature

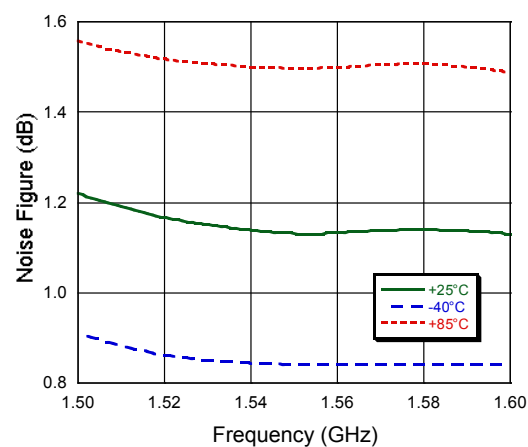

Input IP_3 , $T_A = +25^\circ\text{C}$

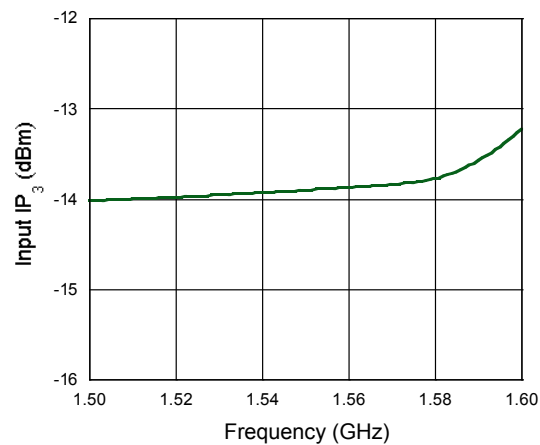

VSWR, $T_A = +25^\circ\text{C}$

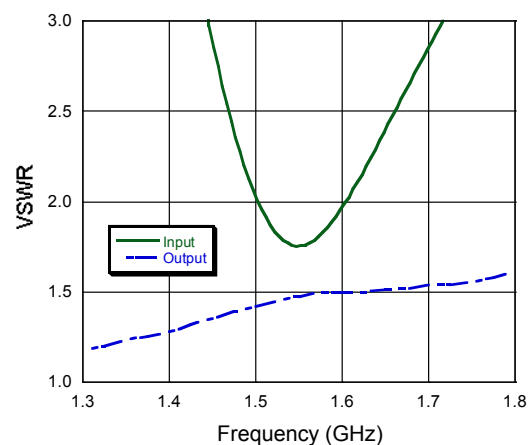

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.