














Last Time Buy Date: 30 Sep 2019

Date of discontinuation: 31 Mar 2020

< List of part numbers with package codes > DEA1X3F331JA3B

Shape

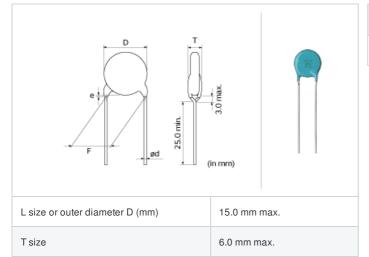

7.5 ±1.0mm

0.6 ±0.05mm

Up to the end of crimp



Packaging	Specifications	Minimum quantity
В	Packing in bulk	100

Specifications

Lead spacing F

Lead diameter d

Paint dripping e

Capacitance	330pF±5%
Rated voltage	3150Vdc
Temperature characteristics (complied standard)	SL(JIS)
Temperature coefficient	+350 to -1000ppm/°C
Temperature range of temperature characteristics	20 to 85°C
Operating temperature range	-25 to 125°C

1 of 2




^{1.} This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

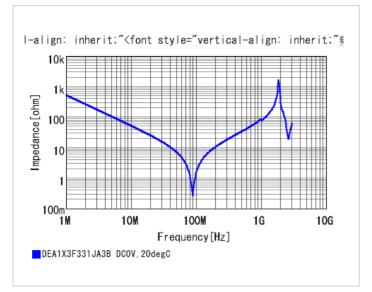


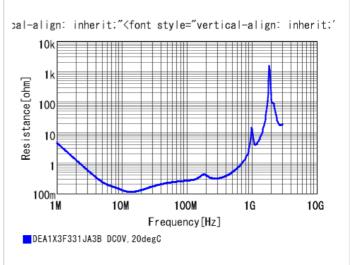

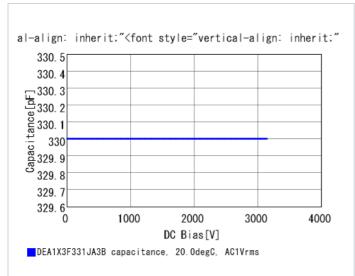

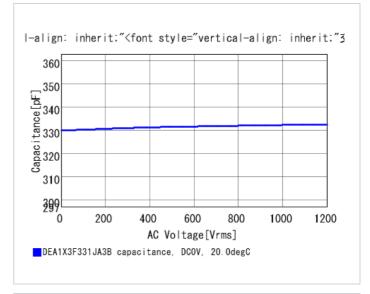

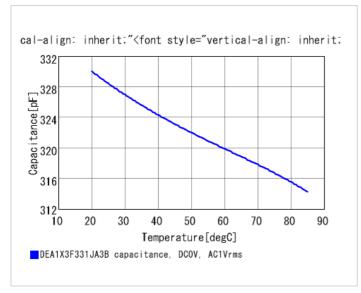

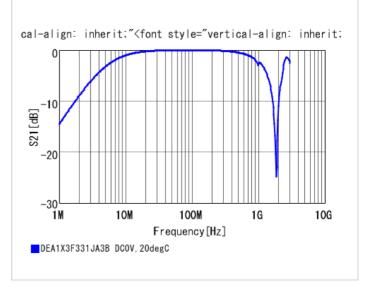

2 of 2



^{1.}This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

^{2.} This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.