

0009626074

st a Quote

0009626074 Information

Heisener.com	Part Number	0009626074	
	Manufacturer	Molex, LLC	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN RCPT BOTTOM 7POS TIN	- 68.
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Requ

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



0009626074 Specifications

Manufacturer Part Number 0009626074 Manufacturer Molex, LLC Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series KK? 2145 Connector Type Receptacle, Bottom Entry Contact Type Board to Board or Cable Number of Positions 7 Number of Positions Loaded All Prich - Mating 0.156° (3.96mm) Number of Rows 1 Number of Rows 1 Number of Rows 1 Yeen Solder Solder Solder Soltar Finish Thickness - Mating Gouin (1.52µm) Contact Finish Thickness - Mating Gouin (1.52µm) Insulation Color White Insulation Height 0.449° (11.40mm) Contact Length - Post 0.160° (2.06mm) Material Flammability Rating UL94 V-2		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesKK? 2145Connector TypeReceptacle, Bottom EntryContact TypeBoard to Board or CableStyleBoard to Board or CableNumber of Positions7Number of Positions LoadedAllNumber of Rows1Number of Rows1Number of RowsSolderNumber of RowsSolderStoring TypeSolderContact Finish - MatingSolderContact Finish - MatingGujun (1.52µm)Contact Finish - MatingGujun (1.52µm)Insulation ColorMikeInsulation Finish - MatingSolderInsulation Finish - MatingSolien (1.40µm)Insulation Finish - MatingSolien (1.40µm)<	Manufacturer Part Number	0009626074
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesKK? 2145Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions7Number of Positions LoadedAllPitch - Mating0.156" (3.96mm)Number of Rows1Row Spacing - Mating-Young TypeThrough HoleTerminationSolderFastening TypeLocking RampContact Finish - Mating60µin (1.52µm)Contact Finish Thickness - Mating60µin (1.52µm)Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature40°C ~ 105°C	Manufacturer	Molex, LLC
Package-SeriesKK? 2145Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions7Number of Positions LoadedAllPitch - Mating0.156" (3.96mm)Number of Rows1Row Spacing - Mating-Mounting Typeof OderTerminationSolderFastening TypeCocking RampContact Finish - MatingOin (1.52µm)Contact Finish Thickness - MatingOin (1.52µm)Insulation ColorWhiteInsulation Height0.440" (1.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature40°C ~ 105°C	Category	Connectors, Interconnects
SeriesKK? 2145Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions7Number of Positions LoadedAllPitch - Mating0.156" (3.96mm)Number of Rows1Row Spacing - MatingSolderMounting TypeSolderFareninationSolderFortact Finish - MatingGolden CastenContact Finish - MatingGuin (1.52µm)Contact Finish - MatingGuin (1.52µm)Insulation ColorHiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature40°C ~ 105°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions7Number of Positions LoadedAllPitch - Mating0.156" (3.96mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - Mating0.156" (3.96mm)Contact Finish - MatingInough HoleContact Finish - MatingSolderInsulation ColorGupin (1.52µm)Insulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature-40°C ~ 105°C	Package	-
Contact TypeFende SocketStyleBoard to Board or CableNumber of Positions7Number of Positions LoadedAllPitch - Mating0.156" (3.96mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeLocking RampContact Finish - Mating60µin (1.52µm)Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature40°C ~ 105°C	Series	KK? 2145
StyleBoard to Board or CableNumber of Positions7Number of Positions LoadedAllPitch - Mating0.156" (3.96mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeLocking RampContact Finish - Mating60µin (1.52µm)Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature40°C ~ 105°C	Connector Type	Receptacle, Bottom Entry
Number of Positions 7 Number of Positions Loaded All Pitch - Mating 0.156" (3.96mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Locking Ramp Contact Finish - Mating Tin Contact Finish Thickness - Mating 60µin (1.52µm) Insulation Color White Insulation Height 0.449" (11.40mm) Contact Length - Post 0.160" (4.06mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.156" (3.96mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeLocking RampContact Finish - Mating60µin (1.52µm)Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature40°C ~ 105°C	Style	Board to Board or Cable
Pitch - Mating0.156" (3.96mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeLocking RampContact Finish - MatingTinContact Finish Thickness - Mating6/uin (1.52µm)Insulation ColorVihiteInsulation Height0.449" (11.40mm)Contact Length - Post4/0°C ~ 105°C	Number of Positions	7
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeLocking RampContact Finish - MatingTinContact Finish Thickness - Mating60µin (1.52µm)Insulation ColorVHiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature-40°C ~ 105°C	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeLocking RampContact Finish - MatingTinContact Finish Thickness - Mating60µin (1.52µm)Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature-40°C ~ 105°C	Pitch - Mating	0.156" (3.96mm)
Mounting TypeThrough HoleTerminationSolderFastening TypeLocking RampContact Finish - MatingTinContact Finish Thickness - Mating60µin (1.52µm)Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature40°C ~ 105°C	Number of Rows	1
TerminationSolderFastening TypeLocking RampContact Finish - MatingTinContact Finish Thickness - Mating60µin (1.52µm)Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature40°C ~ 105°C	Row Spacing - Mating	-
Fastening TypeLocking RampContact Finish - MatingTinContact Finish Thickness - Mating60µin (1.52µm)Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature40°C ~ 105°C	Mounting Type	Through Hole
Contact Finish - MatingTinContact Finish Thickness - Mating60µin (1.52µm)Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature-40°C ~ 105°C	Termination	Solder
Contact Finish Thickness - Mating 60µin (1.52µm) Insulation Color White Insulation Height 0.449" (11.40mm) Contact Length - Post 0.160" (4.06mm) Operating Temperature -40°C ~ 105°C	Fastening Type	Locking Ramp
Insulation ColorWhiteInsulation Height0.449" (11.40mm)Contact Length - Post0.160" (4.06mm)Operating Temperature-40°C ~ 105°C	Contact Finish - Mating	Tin
Insulation Height 0.449" (11.40mm) Contact Length - Post 0.160" (4.06mm) Operating Temperature -40°C ~ 105°C	Contact Finish Thickness - Mating	60µin (1.52µm)
Contact Length - Post0.160" (4.06mm)Operating Temperature-40°C ~ 105°C	Insulation Color	White
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Insulation Height	0.449" (11.40mm)
	Contact Length - Post	0.160" (4.06mm)
Material Flammability Rating UL94 V-2	Operating Temperature	-40°C ~ 105°C
	Material Flammability Rating	UL94 V-2

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Board Hooks
	Report errors?

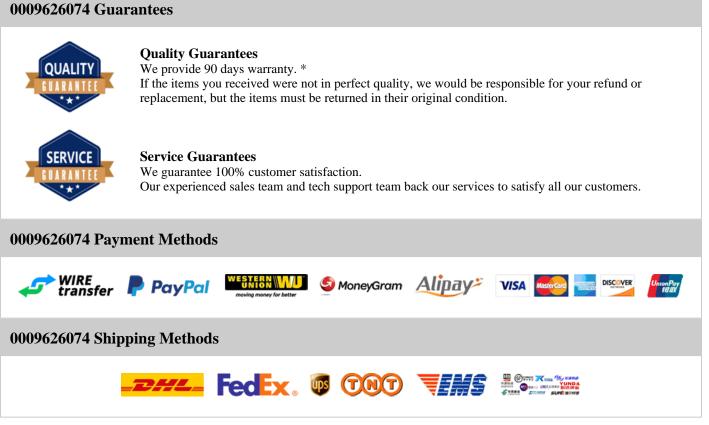

If you have any question about 0009626074, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com