

0090.0010

0090.0010 Information



For Reference Only

Part Number	0090.0010	
Manufacturer	Schurter Inc.	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CARTRIDGE 10A 1KVDC 5AG	
Package	5AG, 10mm x 38.1mm	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



0090.0010 Specifications

ManufacturerSchurter Inc.CategoryCircuit ProtectionElectrical, Specialty FusesPackageSAG, 10mm x 38.1mmSeriesSAG, 10mm x 38.1mmSeriesASO 10.3x38Fuse TypeCatridgeCurrent Rating10AVoltage Rating - AC.Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features.Class.ApprovalsUL, VDEOperating TemperatureSolar C125°CBreaking Capacity @ Rated Voltage0kAMounting TypeHolderPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0.406° Dia x 1.496° L (10.30mm x 38.00mm)		
CategoryCircuit ProtectionBeckageElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmSeriesASO 10.3x38Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC-Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Qapacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0406" Dia x 1.496" L (10.30mm x 38.00mm)	Manufacturer Part Number	0090.0010
Current RatingElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmSeriesASO 10.3x38Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC-Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0,406° Dia x 1.496° L (10.30mm x 38.00mm)	Manufacturer	Schurter Inc.
Package5AG, 10mm x 38.1mmSeriesASO 10.3x38Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC-Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Category	Circuit Protection
Series ASO 10.3x38 Fuse Type Carridge Current Rating 10A Voltage Rating - AC - Voltage Rating - DC 1000V (1kV) Response Time - Applications Solar (Photovoltaic) Features - Class - Approvals UL, VDE Operating Temperature -50°C ~ 125°C Breaking Capacity @ Rated Voltage 20kA Mounting Type Holder Package / Case SAG, 10mm x 38.1mm Size / Dimension 0.406" Dia x 1.496" L (10.30mm x 38.00mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC-Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-0°C ~ 125°CBreaking Capacity @ Rated VoltageSolar (Photown 38.1mmPackage / CaseSAG, 10mm x 38.1mmSize / Dimension-	Package	5AG, 10mm x 38.1mm
Current RatingIOACurrent Rating - AC-Voltage Rating - DCI000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Series	ASO 10.3x38
Voltage Rating - AC-Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Fuse Type	Cartridge
Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Current Rating	10A
Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Voltage Rating - AC	-
ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Voltage Rating - DC	1000V (1kV)
Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Response Time	-
Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Applications	Solar (Photovoltaic)
ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Features	-
Operating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Class	-
Breaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Approvals	UL, VDE
Mounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Operating Temperature	-50°C ~ 125°C
Package / Case 5AG, 10mm x 38.1mm Size / Dimension 0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Breaking Capacity @ Rated Voltage	20kA
Size / Dimension 0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Mounting Type	Holder
	Package / Case	5AG, 10mm x 38.1mm
Report errors?	Size / Dimension	0.406" Dia x 1.496" L (10.30mm x 38.00mm)
		Report errors?

0090.0010 Guarantees

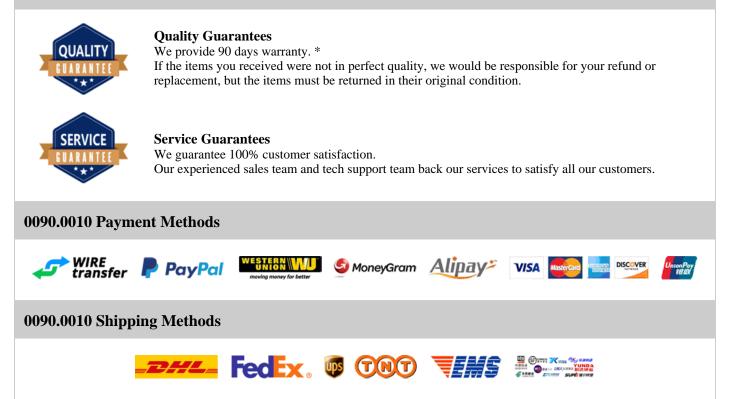

If you have any question about 0090.0010, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com