

## 0090.0025

### 0090.0025 Information



For Reference Only

Part Number	0090.0025	
Manufacturer	Schurter Inc.	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CARTRIDGE 25A 1KVDC 5AG	
Package	5AG, 10mm x 38.1mm	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

# **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 0090.0025 Specifications

Manufacturer Schurter Inc.   Category Circuit Protection   Electrical, Specialty Fuses Electrical, Specialty Fuses   Package SAG, 10mm x 38.1mm   Series ASO 10.3x38   Fuse Type Cartridge   Current Rating 25A   Voltage Rating - AC -   Voltage Rating - DC 1000V (1kV)   Response Time -   Applications Solar (Photovoltaic)   Features -   Class -   Approvals UL, VDE   Operating Temperature 20kA   Package / Case SAG, 10mm x 38.1mm   Size / Dimension 5AG, 10mm x 38.1mm		
CategoryCircuit ProtectionElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmPackageASO 10.3x38Fuse TypeCartridgeCurrent Rating25AVoltage Rating - AC-Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature20kABreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Manufacturer Part Number	0090.0025
BitElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmSeriesASO 10.3x38Fuse TypeCartridgeCurrent Rating25AVoltage Rating - AC-Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0,406° Dia x 1.496° L (10.30mm x 38.00mm)	Manufacturer	Schurter Inc.
Package5AG, 10mm x 38.1mmSeriesASO 10.3x38Fuse TypeCartridgeCurrent Rating25AVoltage Rating - AC-Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Category	Circuit Protection
Series ASO 10.3x38   Fuse Type Cartridge   Current Rating 25A   Voltage Rating - AC -   Voltage Rating - DC 1000V (1kV)   Response Time -   Applications Solar (Photovoltaic)   Features -   Class -   Approvals UL, VDE   Operating Temperature -50°C ~ 125°C   Breaking Capacity @ Rated Voltage 20kA   Mounting Type Holder   Package / Case SAG, 10mm x 38.1mm   Size / Dimension 0.406" Dia x 1.496" L (10.30mm x 38.00mm)		Electrical, Specialty Fuses
Fuse Type Cartridge   Current Rating 25A   Voltage Rating - AC -   Voltage Rating - DC 1000V (1kV)   Response Time -   Applications Solar (Photovoltaic)   Features -   Class -   Approvals UL, VDE   Operating Temperature -0°C ~ 125°C   Breaking Capacity @ Rated Voltage 20kA   Mounting Type Holder   Package / Case 5AG, 10mm x 38.1mm   Size / Dimension 0.406° Dia x 1.496° L (10.30mm x 38.00mm)	Package	5AG, 10mm x 38.1mm
Current Rating 25A   Current Rating - AC -   Voltage Rating - DC 1000V (1kV)   Response Time -   Applications Solar (Photovoltaic)   Features -   Class -   Approvals UL, VDE   Operating Temperature -50°C ~ 125°C   Breaking Capacity @ Rated Voltage 20kA   Mounting Type Holder   Package / Case 5AG, 10mm x 38.1mm   Size / Dimension 0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Series	ASO 10.3x38
Voltage Rating - AC-Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Fuse Type	Cartridge
Voltage Rating - DC1000V (1kV)Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Current Rating	25A
Response Time-ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Voltage Rating - AC	-
ApplicationsSolar (Photovoltaic)Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Voltage Rating - DC	1000V (1kV)
Features-Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Response Time	-
Class-ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Applications	Solar (Photovoltaic)
ApprovalsUL, VDEOperating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Features	-
Operating Temperature-50°C ~ 125°CBreaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Class	-
Breaking Capacity @ Rated Voltage20kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Approvals	UL, VDE
Mounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Operating Temperature	-50°C ~ 125°C
Package / Case 5AG, 10mm x 38.1mm   Size / Dimension 0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Breaking Capacity @ Rated Voltage	20kA
Size / Dimension 0.406" Dia x 1.496" L (10.30mm x 38.00mm)	Mounting Type	Holder
	Package / Case	5AG, 10mm x 38.1mm
Report errors?	Size / Dimension	0.406" Dia x 1.496" L (10.30mm x 38.00mm)
		Report errors?

#### 0090.0025 Guarantees

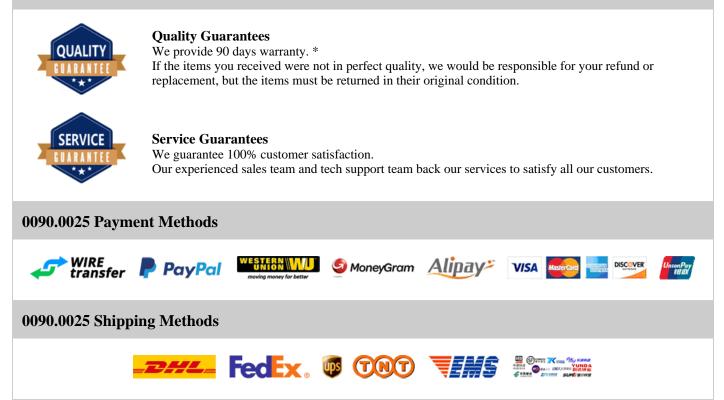

If you have any question about 0090.0025, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com