

0503057

0503057 Information



For Reference Only

Part Number	0503057	
Manufacturer	Phoenix Contact	
Category	Connectors, Interconnects Terminal Blocks - Din Rail, Channel	
Description	CONN TERM BLK FEED THRU 6-20 AWG	
Package	-	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com	
	E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



0503057 Specifications

Manufacturer Part Number 0503057 Manufacturer Phoenix Contact Category Connectors, Interconnects Package Terminal Blocks - Din Rail, Channel Package - Stries CLIPLINE SSK Type Feed Through Disconnect Type - Number of Positions 2 Number of Levels 1 Termination Style 10.4mm Current - IEC Srew Voltage - IEC Solov Voltage - IEC Solov Voltage - IEC - Vire Gauge or Range - AWG - Wire Gauge or Range - AWG - Vire Gauge or Range - AWG - Vire Gauge or Range - AWG - Features Explosion Provingenter		
CategoryConnectors, Interconnects Terminal Blocks - Din Rail, ChannelPackage-Package-SeriesCLIPLINE SSKTypeFeed ThroughDisconnect Type-Number of Positions2Number of Levels1Terminal - Width0.4mmTermination StyleScrewCurrent - IECS7AVoltage - IEC800VVoltage - UL-Wire Gauge or Range - AWG6.20 AWGWire Gauge or Range - AWG5.16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWite	Manufacturer Part Number	0503057
Terminal Blocks - Din Rail, ChannelPackage-SeriesCLIPLINE SSKTypeFeed ThroughDisconnect Type-Number of Positions2Number of Levels1Terminal - Width10.4mmTermination StyleScrewCurrent - IEC57AVoltage - IEC800VCurrent - UL-Wire Gauge or Range - AWG6-20 AWGWire Gauge or Range - AWG5.51 finm2FeaturesExplosion Proof, Harsh EnvironmentColorWinie	Manufacturer	Phoenix Contact
Package-SeriesCLIPLINE SSKTypeFeed ThroughDisconnect Type-Number of Positions2Number of Levels1Terminal - Width10.4mmTermination StyleScrewCurrent - IEC57AVoltage - IEC800VVoltage - UL-Wire Gauge or Range - AWG6.20 AWGWire Gauge or Range - AMG5.51 Gnm²FeaturesEpolsion Proof, Harsh EnvironmentColorWite	Category	Connectors, Interconnects
SeriesCLIPLINE SSKTypeFeed ThroughDisconnect Type-Number of Positions2Number of Levels1Terminal - Width10.4mmTermination StyleScrewCurrent - IEC57AVoltage - IEC800VCurrent - UL-Voltage or Range - AWG6-20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWite		Terminal Blocks - Din Rail, Channel
TypeFeed ThroughDisconnect Type-Number of Positions2Number of Levels1Terminal - Width10.4mmTermination StyleScrewCurrent - IEC57AVoltage - IEC800VCurrent - UL-Voltage or Range - AMG6.20 AWGWire Gauge or Range - AMG5.51 Gmm²FeaturesExplosion Flansh EnvironmentColorWite	Package	-
Disconnect Type-Disconnect Type-Number of Positions2Number of Levels1Terminal - Width10.4mmTermination StyleScrewCurrent - IEC57AVoltage - IEC800VCurrent - UL-Voltage - UL-Wire Gauge or Range - AWG6-20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWhite	Series	CLIPLINE SSK
Number of Positions2Number of Levels1Terminal - Width10.4mmTermination StyleScrewCurrent - IEC57AVoltage - IEC800VCurrent - UL-Voltage - ULScrewWire Gauge or Range - AWG6-20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWite	Туре	Feed Through
Number of Levels1Number of Levels10.4mmTerminal - Width0.4mmTermination StyleScrewCurrent - IEC57AVoltage - IEC800VCurrent - UL-Voltage - UL-Voltage - MAG6.20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWite	Disconnect Type	-
Terminal - Width10.4mmTermination StyleScrewCurrent - IEC57AVoltage - IEC800VCurrent - UL-Voltage - UL-Wire Gauge or Range - AWG6-20 AWGFeaturesExplosion Proof, Harsh EnvironmentColorWite	Number of Positions	2
Termination StyleScrewCurrent - IEC57AVoltage - IEC800VCurrent - UL-Voltage - UL-Voltage or Range - AWG6-20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWhite	Number of Levels	1
Current - IEC57AVoltage - IEC800VCurrent - UL-Voltage - UL-Voltage or Range - AWG6-20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWhite	Terminal - Width	10.4mm
Voltage - IEC800VCurrent - UL-Voltage - UL-Wire Gauge or Range - AWG6-20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWhite	Termination Style	Screw
Current - UL-Voltage - UL-Wire Gauge or Range - AWG6-20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWhite	Current - IEC	57A
Voltage - UL-Wire Gauge or Range - AWG6-20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWhite	Voltage - IEC	800V
Wire Gauge or Range - AWG6-20 AWGWire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWhite	Current - UL	-
Wire Gauge or Range - mm²0.5-16mm²FeaturesExplosion Proof, Harsh EnvironmentColorWhite	Voltage - UL	-
FeaturesExplosion Proof, Harsh EnvironmentColorWhite	Wire Gauge or Range - AWG	6-20 AWG
Color White	Wire Gauge or Range - mm ²	0.5-16mm ²
	Features	Explosion Proof, Harsh Environment
Report errors?	Color	White
		Report errors?

0503057 Guarantees

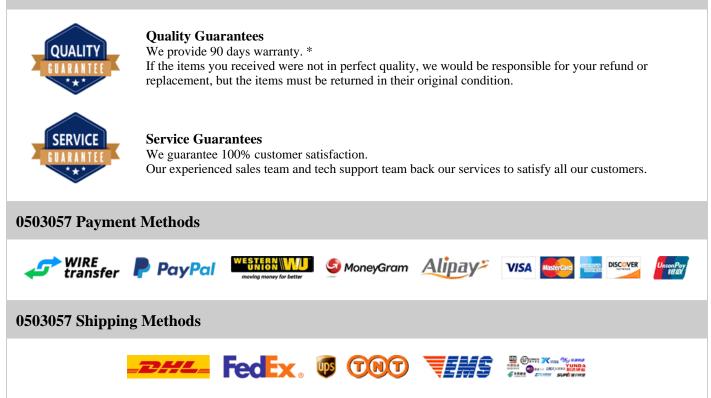

If you have any question about 0503057, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com