

0682-0-15-01-32-02-10-0

0682-0-15-01-32-02-10-0 Information

Heisener.com	 0682-0-15-01-32-02-10-0 Mill-Max Manufacturing Corp. Connectors, Interconnects Terminals - PC Pin Receptacles, Socket Connectors CONN PIN RCPT .015025 SOLDER - For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



0682-0-15-01-32-02-10-0 Specifications

ManufacturerMill-Max Manufacturing Corp.CategoryConnectors, InterconnectsTerminals - PC Pin Receptacles, Socket ConnectorsPackage-Series0682Tail TypeNo TailTerminationSolderLength - Overall0.166" (4.22mm)Accepts Pin Diameter0.015" ~ 0.025" (0.38mm ~ 0.64mm)Mounting Hole Diameter0.056" (1.42mm)Flange Diameter0.072" (1.83mm)Flange Diameter0.072" (1.83mm)Socket Depth0.147" (3.73mm)Contact MaterialBeryllium Copper		
CategoryConnectors, Interconnects Terminals - PC Pin Receptacles, Socket ConnectorsPackage-Series0682Tail TypeNo TailTerminationSolderLength - Overall0.166" (4.22mm)Accepts Pin Diameter0.015" ~ 0.025" (0.38mm ~ 0.64mm)Mounting Hole Diameter0.056" (1.42mm)Pin Hole Diameter0.072" (1.83mm)Flange Diameter0.072" (1.83mm)Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact FinishTin-LeadIonjun (2.54µm)100µin (2.54µm)	Manufacturer Part Number	0682-0-15-01-32-02-10-0
Terminals - PC Pin Receptacles, Socket ConnectorsPackage-Series0682Tail TypeNo TailTerminationSolderLength - Overall0.166" (4.22mm)Accepts Pin Diameter0.015" ~ 0.025" (0.38mm ~ 0.64mm)Mounting Hole Diameter0.056" (1.42mm)Pin Hole Diameter0.043" (1.09mm)Flange Diameter0.072" (1.83mm)Tail Diameter-Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact Finish Thickness100µin (2.54µm)	Manufacturer	Mill-Max Manufacturing Corp.
Package-Series0682Tail TypeNo TailTerminationSolderLength - Overall0.166" (4.22mm)Accepts Pin Diameter0.015" ~ 0.025" (0.38mm ~ 0.64mm)Mounting Hole Diameter0.056" (1.42mm)Pin Hole Diameter0.043" (1.09mm)Flange Diameter0.072" (1.83mm)Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact Finish Thickness100µin (2.54µm)	Category	Connectors, Interconnects
Series 0682 Tail Type No Tail Termination Solder Length - Overall 0.166" (4.22mm) Accepts Pin Diameter 0.015" ~ 0.025" (0.38mm ~ 0.64mm) Mounting Hole Diameter 0.056" (1.42mm) Pin Hole Diameter 0.056" (1.42mm) Flange Diameter 0.043" (1.09mm) Flange Diameter 0.072" (1.83mm) Tail Diameter 0.072" (1.83mm) Socket Depth 0.147" (3.73mm) Contact Material Beryllium Copper Contact Finish Thickness 100µin (2.54µm)		Terminals - PC Pin Receptacles, Socket Connectors
Tail TypeNo TailTerminationSolderLength - Overall0.166" (4.22mm)Accepts Pin Diameter0.015" ~ 0.025" (0.38mm ~ 0.64mm)Mounting Hole Diameter0.056" (1.42mm)Pin Hole Diameter0.043" (1.09mm)Flange Diameter0.072" (1.83mm)Tail Diameter0.171" (3.73mm)Socket Depth0.147" (3.73mm)Contact MaterialFin-LeadContact Finish Thickness100µin (2.54µm)	Package	-
TerminationSolderLength - Overall0.166" (4.22mm)Accepts Pin Diameter0.015" ~ 0.025" (0.38mm ~ 0.64mm)Mounting Hole Diameter0.056" (1.42mm)Pin Hole Diameter0.043" (1.09mm)Flange Diameter0.072" (1.83mm)Flange Diameter-Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact Finish Thickness100µin (2.54µm)	Series	0682
Length - Overall0.166" (4.22mm)Accepts Pin Diameter0.015" ~ 0.025" (0.38mm ~ 0.64mm)Mounting Hole Diameter0.056" (1.42mm)Pin Hole Diameter0.043" (1.09mm)Flange Diameter0.072" (1.83mm)Tail Diameter-Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact FinishTin-LeadIO0µin (2.54µm)100µin (2.54µm)	Tail Type	No Tail
Accepts Pin Diameter 0.015" ~ 0.025" (0.38mm ~ 0.64mm) Mounting Hole Diameter 0.056" (1.42mm) Pin Hole Diameter 0.043" (1.09mm) Flange Diameter 0.072" (1.83mm) Tail Diameter - Socket Depth 0.147" (3.73mm) Contact Material Beryllium Copper Contact Finish Tin-Lead Mounting Hole Diameter 100µin (2.54µm)	Termination	Solder
Mounting Hole Diameter0.056" (1.42mm)Pin Hole Diameter0.043" (1.09mm)Flange Diameter0.072" (1.83mm)Tail Diameter-Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact FinishTin-LeadContact Finish Thickness100µin (2.54µm)	Length - Overall	0.166" (4.22mm)
Pin Hole Diameter0.043" (1.09mm)Flange Diameter0.072" (1.83mm)Tail Diameter-Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact FinishTin-LeadContact Finish Thickness100µin (2.54µm)	Accepts Pin Diameter	0.015" ~ 0.025" (0.38mm ~ 0.64mm)
Flange Diameter0.072" (1.83mm)Tail Diameter-Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact FinishTin-LeadContact Finish Thickness100µin (2.54µm)	Mounting Hole Diameter	0.056" (1.42mm)
Tail Diameter-Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact FinishTin-LeadContact Finish Thickness100µin (2.54µm)	Pin Hole Diameter	0.043" (1.09mm)
Socket Depth0.147" (3.73mm)Contact MaterialBeryllium CopperContact FinishTin-LeadContact Finish Thickness100µin (2.54µm)	Flange Diameter	0.072" (1.83mm)
Contact MaterialBeryllium CopperContact FinishTin-LeadContact Finish Thickness100µin (2.54µm)	Tail Diameter	_
Contact FinishTin-LeadContact Finish Thickness100µin (2.54µm)	Socket Depth	0.147" (3.73mm)
Contact Finish Thickness 100µin (2.54µm)	Contact Material	Beryllium Copper
	Contact Finish	Tin-Lead
Report errors?	Contact Finish Thickness	100µin (2.54µm)
		Report errors?

0682-0-15-01-32-02-10-0 Guarantees




Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



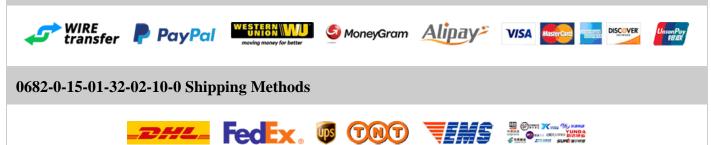

If you have any question about 0682-0-15-01-32-02-10-0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com