

0750190013

Quote

0750190013 Information

	Part Number	0750190013	
	Manufacturer	Molex, LLC	12125 2
selsener.com.	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN RCPT 108POS R/A 1.5MM	- <u>2</u> ,23
	Package	-	i ni A
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



0750190013 Specifications

Manufacturer Part Number0750190013ManufacturerMolex, LLCCategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesPlateau HS Dock? 75019Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions LoadedIINumber of Rows3Number of RowsSocketNumber of RowsSocketNumber of RowsSocketStolar TypePrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingSolderStaltion ColorSolderFinish Thickness - MatingSolderInsulation Color.333" (9.98mm)Contact Length - PostSolderSolder Finish Contact Contact Finish Contact.3028" (9.2820")Contact Length - Post.3028" (9.2800")Contact Length - Post.3028" (9.200")Contact Length - Post.3028" (9.200")		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesPlateau HS Dock? 75019Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions108Number of Positions LoadedAllPitch - Mating-Number of Rows3Row Spacing - Mating-Nounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Manufacturer Part Number	0750190013
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesPlateau HS Dock? 75019Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions108Number of Positions LoadedAllPitch - Mating-Number of Rows3Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeGoldContact Finish - Mating-Contact Finish Thickness - Mating30µin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Manufacturer	Molex, LLC
Package-SeriesPlatea HS Dock? 75019Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions108Number of Positions LoadedAllPitch - Mating-Number of Rows3Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeGoldContact Finish - Mating-SolderSolderFastening TypeSolderInsulation Color-Insulation Finish FinishersSoljen (Solgen)Insulation Finish - Mating-Solder Contact Finish PhoteSoljen (Solgen)Insulation Finish - MatingSoljen (Solgen)Insulation Finish - Mating-Soljen (Solgen)-Insulation Finish - MatingSoljen (Solgen)Insulation Finish - Mating-Soljen (Solgen)-Solter Finish - Mating-Solter Finish - Post-	Category	Connectors, Interconnects
SeriesPlateau HS Dock? 75019Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions108Number of Positions LoadedAllPitch - Mating-Number of Rows3Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleFastening TypeOldContact Finish - MatingGoldContact Finish - MatingGoldInsulation Color-Insulation Finish0.393" (0.98mm)Contact Length - Post0.111" (2.82mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions108Number of Positions LoadedAllPitch - Mating-Number of Rows3Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderContact Finish - MatingGoldContact Finish - Mating-Insulation Color-Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions108Number of Positions LoadedAllPitch - Mating-Pitch - Mating3Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Series	Plateau HS Dock? 75019
StyleBoard to BoardStyleBoard to BoardNumber of Positions108Number of Positions LoadedAllPitch - Mating-Number of Rows3Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Connector Type	Receptacle
Number of Positions 108 Number of Positions Loaded All Pitch - Mating - Number of Rows 3 Row Spacing - Mating - Mounting Type Through Hole, Right Angle Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color - Insulation Height 0.393" (9.98mm) Contact Length - Post 0.11" (2.82mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating-Number of Rows3Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.76µm)Insulation Color-Fnullation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Style	Board to Board
Pitch - Mating-Number of Rows3Row Spacing - Mating-Mounting TypeFnough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Number of Positions	108
Number of Rows3Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Pitch - Mating	-
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3/uin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Number of Rows	3
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Mounting Type	Through Hole, Right Angle
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Termination	Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Fastening Type	Push-Pull
Insulation Color-Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Contact Finish - Mating	Gold
Insulation Height0.393" (9.98mm)Contact Length - Post0.111" (2.82mm)	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post 0.111" (2.82mm)	Insulation Color	-
• • • • • • • • • • • • • • • • • • •	Insulation Height	0.393" (9.98mm)
	Contact Length - Post	0.111" (2.82mm)
Operating Temperature -20°C ~ 85°C	Operating Temperature	-20°C ~ 85°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	Board Guide	
		Report errors?

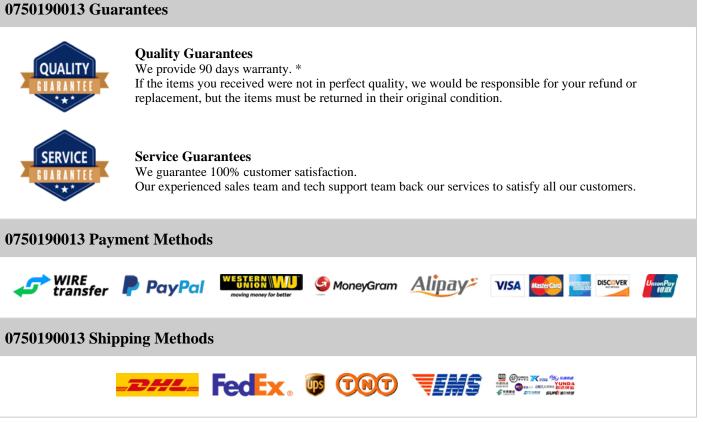

If you have any question about 0750190013, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com